

CertainTeed

Specification Sheet

CERTAPRO™ Commercial Board

1. PRODUCT NAME

CERTAPro™ Commercial Board

2. MANUFACTURER


CertainTeed Corporation
P.O. Box 860
Valley Forge, PA 19482-0105
Phone: (610) 341-7000
(800) 233-8990
Fax: (610) 341-7571
Fax-On-Demand: (800) 947-0057
Website: www.certainteed.com

3. PRODUCT DESCRIPTION

Basic Use: CertaPro Commercial Board is used where board stiffness properties are required and also func-

tions as an exterior insulation when covered with a weather barrier. Commercial Board is used in exterior curtain walls, interior walls, floor/ceiling assemblies and as an exterior insulation on HVAC ducts and plenums or in constructions where framing is not present. It is also used as thermal insulation on tanks and vessels.

Benefits: CertaPro Commercial Board provides high sound absorption and excellent thermal performance. The product is offered in a variety of stiffness properties from flexible to rigid and all can be easily cut, handled, fabricated and installed. The vapor retarder facing provides abuse resistance. All

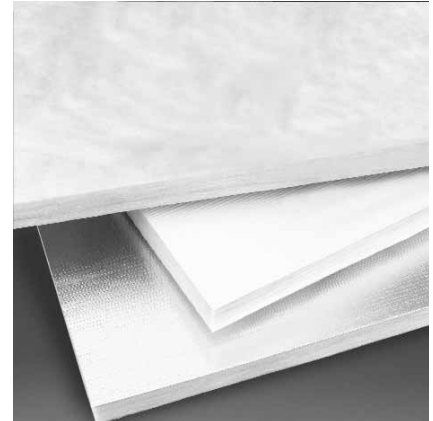

commercial boards are UL listed. The UL listed ASJ and FSK facings for surface burning characteristics provide vapor retarder performance and a Class A surface which may be left exposed.

Composition and Materials: The product is composed of glass fibers bonded together with a thermoset binder. It is available unfaced or with a foil-scrim-kraft (FSK) or white kraft-scrim-foil (ASJ) facing adhered to the fiber glass board.

Limitations: Insulation should be kept clean and dry at all times.

Sizes: See table to the left. Contact CertainTeed for other sizes and minimum order quantities.

4. TECHNICAL DATA

Applicable Standards

- Model Building Codes:
 - (ICC)
 - New York City MEA 35-79-M
 - California Quality Standards, Reg. No. CA-TO24 (PA)
 - City of Los Angeles, RR 8148
- Material Standards:
 - (ASTM C553)
CB 150, Type I, II & III
 - (ASTM C612)
CB 150 & CB 225, Type IA
CB 300 & CB 600, Types IA & IB
 - (CAN/CGSB-51.10-92)
CB 150 & CB 225, Type II, Class II
CB 300 & CB 600, Types I, Class II

Fire Resistance:

- Fire Hazard Classification:
 - (ASTM E84, UL 723, NFPA 255)
 - (CAN/ULC-S102-M88)
Max. Flame Spread Index; 25
Max Smoke Developed Index; 50

AVAILABLE SIZES								
Product Type	Thickness		Density		Thermal Resistance		Thermal Conductivity	
	in.	mm	Lb/ft ³	Kg/m ³	R	RSI	Btu·in	W
							(ft·ft. ² ·°F)	(m ² ·°C)
CB 150	1½	38	1.50	24	6.0	1.06	0.25	0.036
	2	51	1.50	24	8.0	1.41	0.25	0.036
	2½	64	1.50	24	10.0	1.76	0.25	0.036
	3	76	1.50	24	12.0	2.11	0.25	0.036
	3½	89	1.50	24	14.0	2.47	0.25	0.036
	4	102	1.50	24	16.0	2.82	0.25	0.036
CB 225	1	25	2.25	36	4.3	0.77	0.23	0.033
	1½	38	2.25	36	6.5	1.15	0.23	0.033
	2	51	2.25	36	8.7	1.53	0.23	0.033
	2½	64	2.25	36	10.9	1.91	0.23	0.033
	3	76	2.25	36	13.0	2.30	0.23	0.033
	3½	89	2.25	36	15.2	2.68	0.23	0.033
	4	102	2.25	36	17.4	3.06	0.23	0.033
CB 300	1	25	3.00	48	4.3	0.77	0.23	0.033
	1½	38	3.00	48	6.5	1.15	0.23	0.033
	2	51	3.00	48	8.7	1.53	0.23	0.033
	2½	64	3.00	48	10.9	1.92	0.23	0.033
	3	76	3.00	48	13.0	2.30	0.23	0.033
	3½	89	3.00	48	15.2	2.68	0.23	0.033
	4	102	3.00	48	17.4	3.06	0.23	0.033
CB 600	1	25	6.00	96	4.5	0.80	0.22	0.032
	1½	38	6.00	96	6.8	1.20	0.22	0.032
	2	51	6.00	96	9.1	1.60	0.22	0.032

All/Service/Jacket (ASJ facing) is not available in Type CB 150.

- Limited Combustible:
 - (NFPA 259)
 - ≤ 3,500 Btu/lb
- Physical/Chemical Properties:**
- Thermal Performance:
 - (ASTM C177 or ASTM C518)
 - See available size table.
- Acoustical Performance:
 - (ASTM C423)
 - See table below.
- Operating Limits:
 - Temperature: (ASTM C411)
 - Max. 250°F (121°C) (Faced)
 - Max. 450°F (232°C) (Unfaced)
- Water Vapor Permeance:
 - (ASTM E96, Dessicant Method)
 - Max. 0.02 perms
 - (1.15 x 10⁻⁹ g/Pa-s-m²)
 - (ASJ & FSK Facing)
- Water Vapor Sorption:
 - (ASTM C1104)
 - ≤5% by weight
- Corrosiveness: (ASTM C665)
 - Pass

- Fungi Resistance: (ASTM C1338)
 - Pass
- Odor Emission: (ASTM C1304)
 - Pass

Quality Assurance: CertainTeed was the first fiber glass insulation manufacturer to have its manufacturing plants, R&D center and corporate headquarters registered to ISO 9000 standards.

5. INSTALLATION

Exterior Walls – the faced side of the board should be installed towards the interior side of the structure, except in warm and humid areas where local code regulations may require a vapor retarder to face toward the exterior.

Curtain Walls – CertaPro Commercial Board is applied to spandrel and pre-cast concrete panels with approved adhesives or mechanical fasteners. Boards may also be installed using hat channels or Z studs. Where a vapor retarder is required, all joints, seams

and penetrations shall be sealed. Exterior applications require the insulation to be covered with appropriate weather barrier finish in addition to the factory-applied vapor retarder facing. Choice of finish depends on mechanical abuse, weather exposure, and appearance requirements.

HVAC/Mechanical – All fabrication, application and installation steps should be in accordance with the requirements of the National Commercial and Industrial Installation Standards (current edition) published by the Midwest Insulation Contractors Association (MICA).

These installation recommendations are general in nature. Other methods are acceptable. Please consult your contractor for recommendations best suited to the applications.

6. AVAILABILITY AND COST

Manufactured and sold throughout the United States. For availability and cost, contact your local contractor, distributor or call CertainTeed at (800) 233-8990.

7. WARRANTY

Refer to CertainTeed Limited Warranty for Commercial Insulation (30-25-034). Inasmuch as CertainTeed has no control over the installation design, installation workmanship, accessory materials, or conditions of application, CertainTeed does not warrant the performance or results of any installation containing its products.

8. MAINTENANCE

An inspection and preventative maintenance program for the insulation and vapor retarder system is recommended to ensure optimum performance.

9. TECHNICAL SERVICES

Technical assistance can be obtained either from the local CertainTeed sales representative, or by calling Sales Support Group, (800) 233-8990.

10. FILING SYSTEMS

- CertainTeed Pub. No. 30-25-031
- Additional product information available upon request.

ACOUSTICAL PERFORMANCE									
Type	Thickness		Absorption Coefficients @ Octave Band Frequency (Hz)						NRC
	in	mm	125	250	500	1000	2000	4000	
CB 150	1½	38	0.19	0.51	0.82	0.86	0.95	0.97	0.80
	2	51	0.23	0.61	0.94	0.97	0.98	0.96	0.90
	2½	64	0.41	0.78	0.96	0.94	0.93	0.97	0.90
	3	76	0.41	0.94	1.07	1.01	1.00	0.97	1.00
	3½	89	0.60	1.08	1.09	1.02	1.04	1.06	1.05
CB 225	4	102	0.64	1.05	1.07	0.97	0.96	1.01	1.00
	1	25	0.06	0.30	0.68	0.85	0.91	0.94	0.70
	1½	38	0.12	0.48	0.83	0.90	0.90	0.89	0.80
	2	51	0.22	0.63	1.04	1.00	1.00	0.97	0.90
	2½	64	0.31*	0.81*	1.08*	1.02*	1.04*	1.03*	1.00*
	3	76	0.34	0.95	1.08	0.99	0.98	0.99	1.00
CB 300	3½	89	0.54	1.11	1.12	1.01	1.02	1.00	1.05
	4	102	0.70	1.15	1.12	0.99	1.01	1.08	1.05
	1	25	0.08	0.25	0.72	0.88	0.93	0.94	0.70
	1½	38	0.10	0.51	0.89	0.95	0.92	0.93	0.80
	2	51	0.21	0.73	1.08	1.04	1.04	0.96	0.95
	2½	64	0.31	0.81	1.08	1.02	1.04	1.03	1.00
CB 600	3	76	0.41	0.96	1.13	1.03	1.03	1.02	1.05
	3½	89	0.72	1.14	1.11	1.00	1.02	1.00	1.05
	4	102	0.75	1.18	1.09	1.00	1.00	1.02	1.05
	1	25	0.05	0.27	0.78	0.97	0.97	0.91	0.75
CB 600	1½	38	0.17	0.50	0.98	1.03	0.99	0.98	0.90
	2	51	0.31	0.89	1.07	0.99	1.02	0.98	1.00

* Estimated sound absorption coefficients and NRC.
Sound absorption tested in accordance with ASTM C423 using Type A mounting per ASTM E795.

ASK ABOUT OUR OTHER CERTAINTEED PRODUCTS AND SYSTEMS:

EXTERIOR: ROOFING • SIDING • WINDOWS • FENCE • RAILING • TRIM • DECKING • FOUNDATIONS • PIPE
 INTERIOR: INSULATION • WALLS • CEILINGS

CertainTeed Corporation
 P.O. Box 860
 Valley Forge, PA 19482

Professional: 800-233-8990
 Consumer: 800-782-8777
www.certainteed.com



CertainTeed