

## Specification Sheet

### Features & Benefits:

- 100% non-directional fissured pattern.
- Variety of edge detail options and panel sizes.
- No added formaldehyde.

See reverse for additional product specifications.


### Applications:

- Hospitality
- Retail
- Offices
- Education
- Healthcare
- Restaurants


### Attributes:

ITEM NUMBER	NOMINAL SIZE (Inches)	EDGE DETAIL	UL CLASSIFIED		LR	RECYCLED CONTENT %	
			NRC	CAC		POST	PRE
<b>SAFETONE® CLASS A</b>							
<b>BET-150</b>	24 x 24 x 5/8	Narrow Reveal	<b>0.60</b>	<b>33</b>	0.83	<b>18</b>	<b>18-27</b>
<b>BET-154</b>	24 x 24 x 5/8	Reveal	<b>0.60</b>	<b>33</b>	0.83	<b>18</b>	<b>18-27</b>
<b>BET-157</b>	24 x 24 x 5/8	Trim	<b>0.60</b>	<b>33</b>	0.83	<b>18</b>	<b>18-27</b>
<b>BET-194</b>	24 x 48 x 5/8	Reveal	<b>0.60</b>	<b>35</b>	0.83	<b>18</b>	<b>18-27</b>
<b>BET-197</b>	24 x 48 x 5/8	Trim	<b>0.60</b>	<b>35</b>	0.83	<b>18</b>	<b>18-27</b>
<b>BET-2067</b>	24 x 60 x 5/8	Trim	<b>0.60</b>	<b>35</b>	0.83	<b>18</b>	<b>18-27</b>
<b>PROTECTONE®</b> (For specific UL fire resistant time-rated assemblies)							
<b>PBT-154</b>	24 x 24 x 5/8	Reveal	<b>0.55</b>	<b>35</b>	0.83	<b>9</b>	<b>38</b>
<b>PBT-157</b>	24 x 24 x 5/8	Trim	<b>0.55</b>	<b>35</b>	0.83	<b>9</b>	<b>38</b>
<b>PBT-197</b>	24 x 48 x 5/8	Trim	<b>0.55</b>	<b>40</b>	0.83	<b>9</b>	<b>38</b>


ASTM E 1264 Classification: Type III, Form 2, Pattern C D

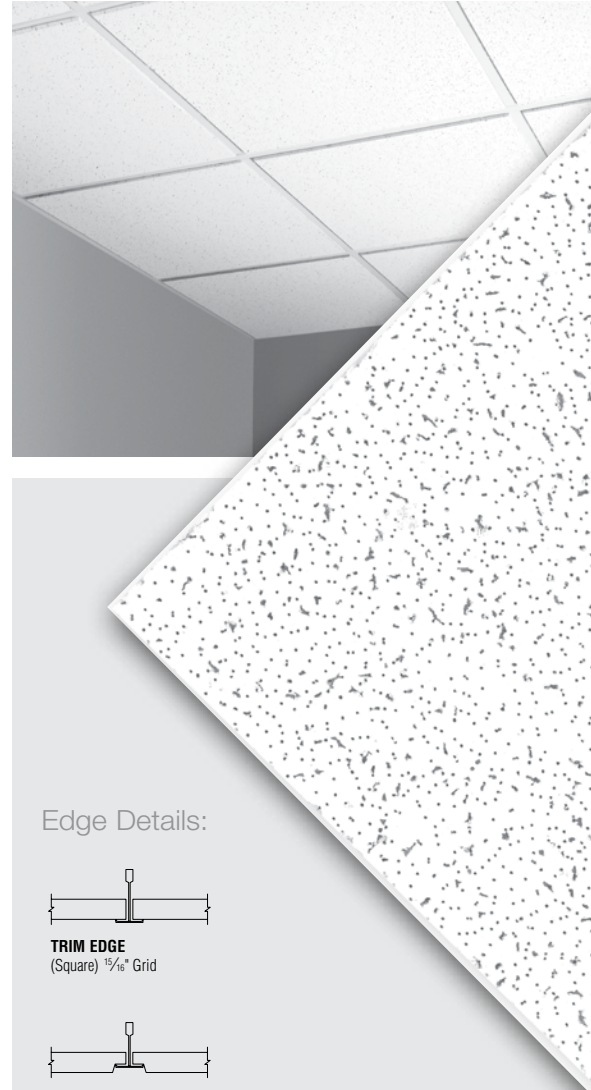


### Edge Details:




**TRIM EDGE**  
(Square) 1/16" Grid



**REVEAL EDGE**  
(Beveled) 1/16" Grid



**NARROW REVEAL EDGE**  
(Corner Bevel) 1/16" Grid



**NARROW REVEAL EDGE**  
(Corner Bevel)  
1/16" Grid (Bolt Slot)



# Product Specification Details

## Acoustical Ceilings

### 09 51 00

#### PART 2: PRODUCTS

##### 2.1 GENERAL

Provide Acoustical Ceiling Material manufactured to meet requirements of this specification in accordance with ASTM E 1264.

##### 2.2 MATERIALS

Acoustical Ceiling Units:

1. Type III
2. Form 2
3. Pattern [C] [D]
4. Non-directional fissured and perforated wet-felted lay-in panels and tile.
5. Size 5/8" thick x [24" x 24"] [24" x 48"]
6. Edge Detail [Trim (Square)] [Reveal] [Narrow Reveal]
7. Noise Reduction Coefficient (NRC) [0.55] [0.60]
8. Ceiling Attenuation Class (CAC) [33] [35] [40]
9. Light Reflectance Coefficient (LR) 0.83
10. Recycled Content [9-18 post] [18-38 pre]
11. Color White
12. Flame Spread Classification (ASTM E 84, CAN/ULC-S102M) Class A
13. Underwriters Laboratories Inc. Fire-Resistance (ASTM E 119, CAN/ULC-S101M) Time-Rated Assembly\* [D203] [D205] [G208] [G218] [G248] [G255] [L201] [P204] [P259] [P260] [P261] [P262] [P264]
14. Manufacturer, subject to compliance with requirements of this specification, CertainTeed Ceilings
15. Product Name [Baroque™] [Protectone® Baroque™]

\* Relevant to Protectone® only. Refer to UL Fire Resistant Directory for specific design information.

Suspension Systems:

1. Profile [9/16" Face] [15/16" Face]
2. Manufacturer CertainTeed Ceilings Systems
3. Product Names [15/16" Classic Stab] [15/16" Classic Hook] [15/16" Classic Environmental Stab] [15/16" Classic Aluminum Capped Stab] [15/16" Classic Aluminum Capped Hook] [9/16" Elite Narrow Stab] [9/16" Smoothline Bolt Slot]
4. Warranty 15-year Limited Warranty when CertainTeed suspension system is installed together with any CertainTeed ceiling panel

Characteristics, properties or performance of materials or systems manufactured by CertainTeed herein described are derived from data obtained under controlled test conditions. CertainTeed makes no warranties, express or implied, as to their characteristics, properties or performance under any variations from such conditions in actual construction. CertainTeed assumes no responsibility for the effects of structural movement.

NOTICE: The information in this document is subject to change without notice. CertainTeed assumes no responsibility for any errors that may inadvertently appear in this document.

#### ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • WINDOWS • DECKING • RAILING • FENCE  
INSULATION • GYPSUM • CEILINGS • FOUNDATIONS • PIPE

CertainTeed Corporation  
P.O. Box 860  
Valley Forge, PA 19482

Professional: 800-233-8990  
Consumer: 800-782-8777

[www.certainteed.com](http://www.certainteed.com) <http://blog.certainteed.com>

© 07/11 CertainTeed Corporation, Printed in the U.S.A.  
Code No. CTC-4512