

Cashmere®

PERFORMANCE SERIES

Mineral Fiber Ceilings

Features & Benefits:

- Upscale appearance.
- Finely textured.
- Popular edge detail options.
- No added formaldehyde.

Applications:

- Galleries
- Resorts
- Hospitality
- Airports
- Retail
- Offices
- Education
- Healthcare
- Restaurants
- Salons

Relative Installed Cost:

\$\$\$\$

PERFORMANCE SERIES



LEED 2009: NC, CI, & Schools

LEED 2009 for Schools

Optimize Energy	Building Reuse	Waste Management	Recycled Content	Regional Materials	Renewable Materials	Daylight & Views	Acoustic Performance	Low-emitting
◆		◆	◆	◆	◆	◆		◆




Attributes:

ITEM NUMBER	NOMINAL SIZE (Inches)	EDGE DETAIL	UL CLASSIFIED			RECYCLED CONTENT %
			NRC	CAC	LR	
SAFETONE® CLASS A						
CM-450	24 x 24 x 3/4	Narrow Reveal	0.60	35	0.83	74
CM-454	24 x 24 x 3/4	Reveal	0.60	35	0.83	74
CM-457	24 x 24 x 3/4	Trim	0.60	35	0.83	74
CM-490	24 x 48 x 3/4	Narrow Reveal	0.60	35	0.83	74
CM-494	24 x 48 x 3/4	Reveal	0.60	35	0.83	74
CM-497	24 x 48 x 3/4	Trim	0.60	35	0.83	74
PROTECTONE® (For specific UL fire resistant time-rated assemblies)						
PCM-450	24 x 24 x 3/4	Narrow Reveal	0.45	35	0.83	47
PCM-454	24 x 24 x 3/4	Reveal	0.45	35	0.83	47

ASTM E 1264 Classification: Type III, Form 1, Pattern E

Edge Details:

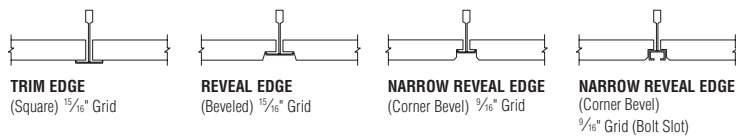

Product Features at a Glance:

- COLOR AVAILABILITY
 - HIGH LIGHT REFLECTANCE
 - PROTECTONE®/UL FIRE RESISTANCE
 - RESISTS SAGGING
 - HIGHLY DECORATIVE
- BIOSHIELD™ BIOSHIELD TREATMENT INCLUDED FOR ADDED MOLD AND MILDEW RESISTANCE.

Color Options:

IN ADDITION TO TRADITIONAL WHITE, YOU CAN MAKE AN IMPACT WITH ONE OF OUR 5 STANDARD COLORS, FOR ITEM NUMBERS: CM-450, CM-454

