

# Gyptone® LINE 4™

## DESIGNER SERIES

Gypsum Ceilings

### Features & Benefits:

- Punched gypsum panel.
- European inspired design.
- Gypsum core.
- Paintable, no primer needed.
- Acoustical tissue backing.
- Sound absorbent.
- Sag resistant.
- Easy plenum access.
- Unique aesthetic appeal.
- Durable.
- Does not contain formaldehyde.

### Applications:

- Retail
- Hotels/Resorts
- Offices
- Restaurants
- Dining Halls
- Atriums
- Corridors
- Airports
- Malls
- Country Clubs
- Schools

### Relative Installed Cost:

\$\$\$\$



DESIGNER SERIES

#### LEED 2009: NC, CI, & Schools

Optimize Energy	Building Reuse	Waste Management	Recycled Content	Regional Materials	Renewable Materials	Daylight & Views
◆		◆	◆			

#### LEED 2009 for Schools

Acoustic Performance	Low-emitting
◆	◆

**CertainTeed**  
SAINT-GOBAIN


## Attributes:

ITEM NUMBER	NOMINAL SIZE (Inches)	EDGE DETAIL	NRC	CAC	LR	PERFORATED AREA	WEIGHT, LBS/SQ. FT. (kg/sq. meter)	RECYCLED CONTENT %
<b>SAFETONE® CLASS A</b>								
5200410258	24 x 24 x 1/2	Trim	0.70†	35†	0.70	17%	1.64 (8)	85
5200410261	24 x 24 x 1/2	Narrow Reveal	0.70†	35†	0.70	17%	1.64 (8)	85

ASTM E 1264 Classification: Type XX, Pattern A G, Fire Class A


† NRC and CAC values when used with CertainTeed CertaPro™ insulation in unfaced 3-1/2" (R-11) as an overlay above the installed ceiling panel. (Without insulation overlay: NRC=0.65, CAC=17)

## Acoustics:

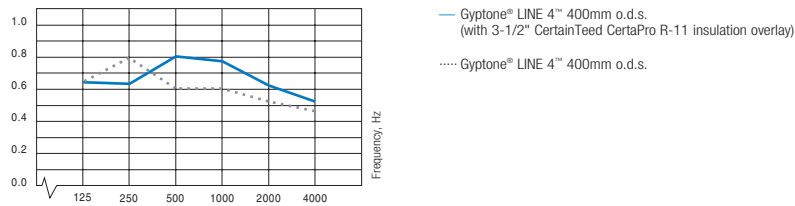


UNIT SIZE TESTED (Inches)	SOUND ABSORPTION COEFFICIENTS – E-400 MOUNTING					
	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
<b>GYPTONE® LINE 4™ (WITH 3-1/2" OVERLAY)</b>						
24 x 24 x 1/2	0.64	0.63	0.80	0.77	0.62	0.52
<b>GYPTONE® LINE 4™</b>						
24 x 24 x 1/2	0.64	0.79	0.60	0.60	0.52	0.46

## Edge Details:



**TRIM EDGE**  
(Square) 1/8" Grid



**NARROW REVEAL EDGE**  
(Corner Bevel) 1/8" Grid

## Product Features at a Glance:

- HIGH DURABILITY
- NOISE REDUCTION
- RESISTS SAGGING
- HIGHLY DECORATIVE

