

Gyptone® POINT 11™

DESIGNER SERIES

Gypsum Ceilings

Features & Benefits:

- Punched gypsum panel.
- European inspired design.
- Gypsum core.
- Paintable, no primer needed.
- Acoustical tissue backing.
- Sound absorbent.
- Sag resistant.
- Easy plenum access.
- Unique aesthetic appeal.
- Durable.
- Does not contain formaldehyde.

Applications:

- Retail
- Hotels/Resorts
- Offices
- Restaurants
- Dining Halls
- Atriums
- Corridors
- Airports
- Malls
- Country Clubs
- Schools

Relative Installed Cost:

\$\$\$\$



DESIGNER SERIES

LEED 2009: NC, CI, & Schools

Optimize Energy	Building Reuse	Waste Management	Recycled Content	Regional Materials	Renewable Materials	Daylight & Views
◆		◆	◆			

LEED 2009 for Schools

Acoustic Performance	Low-emitting
◆	◆

CertainTeed
SAINT-GOBAIN

Gyptone® POINT 11™

DESIGNER SERIES

Gypsum Ceilings


Attributes:

ITEM NUMBER	NOMINAL SIZE (Inches)	EDGE DETAIL	NRC	CAC	LR	PERFORATED AREA	WEIGHT, LBS/SQ. FT. (kg/sq. meter)	RECYCLED CONTENT %
SAFETONE® CLASS A								
5200410316	24 x 24 x 1/2	Trim	0.80†	35†	0.71	12%	1.64 (8)	85
5200410320	24 x 24 x 1/2	Narrow Reveal	0.80†	35†	0.71	12%	1.64 (8)	85

ASTM E 1264 Classification: Type XX, Pattern A G, Fire Class A


† NRC and CAC values when used with CertainTeed CertaPro™ insulation in unfaced 3-1/2" (R-11) as an overlay above the installed ceiling panel. (Without insulation overlay: NRC=0.60, CAC=17)

Acoustics:

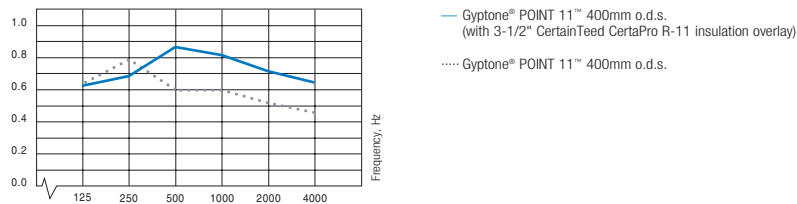

UNIT SIZE TESTED (Inches)	SOUND ABSORPTION COEFFICIENTS – E-400 MOUNTING					
	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
GYPTONE® POINT 11™ (WITH 3-1/2" CT FG OVERLAY)						
24 x 24 x 1/2	0.63	0.69	0.87	0.82	0.72	0.65
GYPTONE® POINT 11™						
24 x 24 x 1/2	0.64	0.79	0.60	0.60	0.52	0.46

Edge Details:



Product Features at a Glance:



CertainTeed
SAINT-GOBAIN