

Gyptone® QUATTRO 20™

DESIGNER SERIES

Gypsum Ceilings

Features & Benefits:

- Punched gypsum panel.
- European inspired design.
- Gypsum core.
- Paintable, no primer needed.
- Acoustical tissue backing.
- Sound absorbent.
- Sag resistant.
- Easy plenum access.
- Unique aesthetic appeal.
- Durable.
- Does not contain formaldehyde.

Applications:

- Retail
- Hotels/Resorts
- Offices
- Restaurants
- Dining Halls
- Atriums
- Corridors
- Airports
- Malls
- Country Clubs
- Schools

Relative Installed Cost:

\$\$\$\$



DESIGNER SERIES

LEED 2009: NC, CI, & Schools

Optimize Energy	Building Reuse	Waste Management	Recycled Content	Regional Materials	Renewable Materials	Daylight & Views	Acoustic Performance	Low-emitting
◆		◆	◆				◆	◆

LEED 2009 for Schools

CertainTeed
SAINT-GOBAIN

Gyptone® QUATTRO 20™

DESIGNER SERIES

Gypsum Ceilings


Attributes:

ITEM NUMBER	NOMINAL SIZE (Inches)	EDGE DETAIL	NRC	CAC	LR	PERFORATED AREA	WEIGHT, LBS/SQ. FT. (kg/sq. meter)	RECYCLED CONTENT %
SAFETONE® CLASS A								
5200410417	24 x 24 x 1/2	Trim	0.75†	35†	0.71	18%	1.64 (8)	85
5200410422	24 x 24 x 1/2	Narrow Reveal	0.75†	35†	0.71	18%	1.64 (8)	85

ASTM E 1264 Classification: Type XX, Pattern A G, Fire Class A


† NRC and CAC values when used with CertainTeed CertaPro™ insulation in unfaced 6-1/4" (R-19) as an overlay above the installed ceiling panel. (Without insulation overlay: NRC=0.65, CAC=17)

Acoustics:

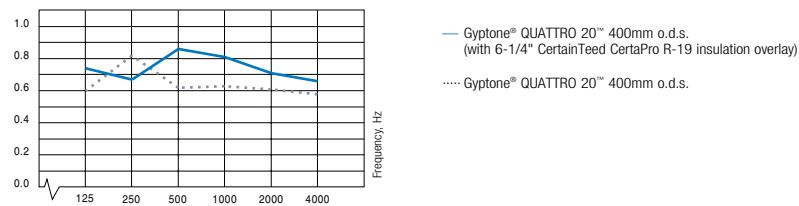


UNIT SIZE TESTED (Inches)	SOUND ABSORPTION COEFFICIENTS – E-400 MOUNTING					
	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
GYPTONE® QUATTRO 20™ (WITH 6" CT FG OVERLAY)						
24 x 24 x 1/2	0.74	0.67	0.86	0.81	0.71	0.66
GYPTONE® QUATTRO 20™						
24 x 24 x 1/2	0.60	0.82	0.62	0.63	0.61	0.58

Edge Details:



TRIM EDGE
(Square) 1/8" Grid



NARROW REVEAL EDGE
(Corner Bevel) 3/16" Grid

Product Features at a Glance:

- HIGH DURABILITY
- NOISE REDUCTION
- RESISTS SAGGING
- HIGHLY DECORATIVE



CertainTeed
SAINT-GOBAIN