


Attributes:


ITEM NUMBER	NOMINAL SIZE (Inches)	EDGE DETAIL	UL CLASSIFIED		LR	RECYCLED CONTENT %
			NRC	CAC		
SAFETONE® CLASS A						
CM-450	24 x 24 x 3/4	Narrow Reveal	.60	35	.82	82-88
CM-454	24 x 24 x 3/4	Reveal	.60	35	.82	82-88
CM-457	24 x 24 x 3/4	Trim	.60	35	.82	82-88
CM-490	24 x 48 x 3/4	Narrow Reveal	.60	35	.82	82-88
CM-494	24 x 48 x 3/4	Reveal	.60	35	.82	82-88
CM-497	24 x 48 x 3/4	Trim	.60	35	.82	82-88
PROTECTONE® (For specific UL fire resistance time-rated assemblies)						
PCM-450	24 x 24 x 3/4	Narrow Reveal	.45	35	.82	53-63
PCM-454	24 x 24 x 3/4	Reveal	.45	35	.82	53-63

ASTM E 1264 Classification: Type III, Form 1, Pattern E

Edge Details:

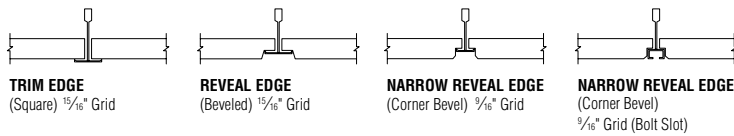

Standard Sizes:

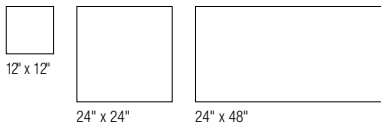

Colortone Options:

IN ADDITION TO TRADITIONAL WHITE, YOU CAN MAKE AN IMPACT WITH ONE OF OUR 5 STANDARD COLOR TONES, FOR ITEM NUMBERS: CM-454, CM-457, CM-497



Product Features at a Glance:

- COLOR AVAILABILITY
- HIGH LIGHT REFLECTANCE
- PROTECTONE®/UL FIRE RESISTANCE
- RESISTS SAGGING
- HIGHLY DECORATIVE

BIOSHIELD™ BIOSHIELD TREATMENT INCLUDED FOR ADDED MOLD AND MILDEW RESISTANCE.



Cashmere®

PERFORMANCE SERIES

Mineral Fiber Ceilings

Features & Benefits:

- Upscale appearance.
- Finely textured.
- Popular edge detail options.
- Available in 12" x 12" tiles for glue up and concealed grid application.

Applications:

- Galleries
- Resorts
- Hospitality
- Airports
- Retail
- Offices
- Education
- Healthcare
- Restaurants
- Salons

Relative Installed Cost:

\$\$\$\$

