

CertainTeed Vantage 10™

Performance Series Mineral Fiber Ceilings

Features:


- Attractive non-directional pattern.
- Classic mineral ceilings look with sag resistant core.
- Withstands combined effects of temperatures to 104°F (40°C) and relative humidity to 90% without sagging.
- PlastiGard™ finish available for a scrubbable/washable surface.

See reverse side for additional product specifications.

ITEM NUMBER	NOMINAL SIZE (Inches)	EDGE DETAIL	UL CLASSIFIED		LR	RECYCLED CONTENT %
			NRC	CAC		
SAFETONE® CLASS A						
VAN-150	24 x 24 x 5/8	Narrow Reveal	.55	33	.82	52-62
VAN-154	24 x 24 x 5/8	Reveal	.55	33	.82	52-62
VAN-157	24 x 24 x 5/8	Trim	.55	33	.82	52-62
VAN-197*	24 x 48 x 5/8	Trim	.55	35	.82	52-62
PROTECTONE® (For specific UL fire resistance time-rated assemblies)						
PVN-154	24 x 24 x 5/8	Reveal	.55	35	.82	53-63
PVN-157	24 x 24 x 5/8	Trim	.55	35	.82	53-63
PVN-197	24 x 48 x 5/8	Trim	.55	40	.82	53-63

ASTM E 1264 Classification: Type III, Form 2, Pattern C D
Type IX, Form 2 Pattern CD (PlastiGard™ finish)

*Specify "PG" after item number for PlastiGard™ finish option. Example: VAN-197-PG

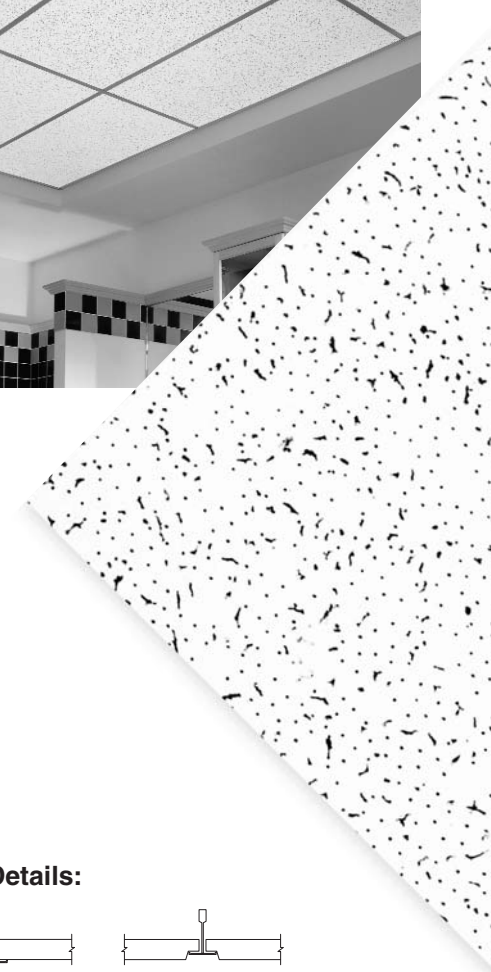

Popular Applications:


- Hospitality • Education • Retail
- Healthcare • Restaurants




BioShield™
BioShield™ treatment **included** for added mold and mildew resistance.




Edge Details:




TRIM EDGE
(Square) 1/4" Grid



REVEAL EDGE
(Beveled) 1/4" Grid



NARROW REVEAL EDGE
(Corner Bevel) 3/8" Grid



NARROW REVEAL EDGE
(Corner Bevel) 3/8" Grid (Bolt Slot)

PRODUCT SPECIFICATION DETAILS

ACOUSTICAL CEILINGS

09 51 00

PART 2: PRODUCTS


2.1 GENERAL

Provide Acoustical Ceiling Material manufactured to meet requirements of this specification in accordance with ASTM E 1264.

2.2 MATERIALS

Acoustical Ceiling Units:

Standard Sizes:



1. Type [III] [IX (PlastiGard™)]
2. Form 2
3. Pattern C D
4. Non-directional fissured and perforated wet-felted lay-in panels with impact resistant coating.
5. Size [5/8"] thick x [24"x 24"] [24"x 48"]
6. Edge Detail [Trim] [Reveal] [Narrow Reveal]
7. Noise Reduction Coefficient (NRC) .55
8. Ceiling Attenuation Class (CAC) [33] [35] [40]
9. Light Reflectance Coefficient (LR) .82
Light Reflectance Designation LR-1
10. Color White
11. Flame Spread Classification (ASTM E 84, CAN/ULC-S102M) Class A
12. Underwriters Laboratories Inc. Fire-Resistance (ASTM E 119, CAN/ULC-S101M)
Time-Rated Assembly* [D203] [D205] [G208] [G218] [G248] [G255] [L201] [P204] [P259] [P260]
[P261] [P262] [P264]
13. Manufacturer, subject to compliance with requirements of this specification, CertainTeed Ceilings
14. Product Name [Vantage 10™] [Protectone® Vantage 10™]

* Relevant to Protectone only. Refer to UL Fire Resistance Directory for specific design information.

Distributed by:

ASK ABOUT OUR OTHER CERTAINTEED PRODUCTS AND SYSTEMS:

EXTERIOR: ROOFING • SIDING • WINDOWS • FENCE • RAILING • TRIM • DECKING • FOUNDATIONS • PIPE
INTERIOR: INSULATION • WALLS • CEILINGS

CertainTeed Corporation
P.O. Box 860
Valley Forge, PA 19482

Professional: 800-233-8990
Consumer: 800-782-8777
www.certainteed.com

CertainTeed 

Characteristics, properties or performance of materials or systems manufactured by CertainTeed herein described are derived from data obtained under controlled test conditions. CertainTeed makes no warranties, express or implied, as to their characteristics, properties or performance under any variations from such conditions in actual construction. CertainTeed assumes no responsibility for the effects of structural movement.

™ © CertainTeed and the tag line "Quality made certain. Satisfaction guaranteed." are trademarks of CertainTeed Corporation. All other trademarks are the property of its affiliates and related companies.

NOTICE: The information in this document is subject to change without notice. CertainTeed assumes no responsibility for any errors that may inadvertently appear in this document.

©02/07 CertainTeed Corporation. Printed in U.S.A. CTC-4586/W/04-2007