

# 9/16" EZ STAB BOLT SLOT SYSTEM - 1/8" REVEAL


## Acoustical Suspension Systems

The EZ Stab Bolt Slot System provides increased strength and stability for easier ceiling grid installation.


### MAIN RUNNER



### CROSS TEE

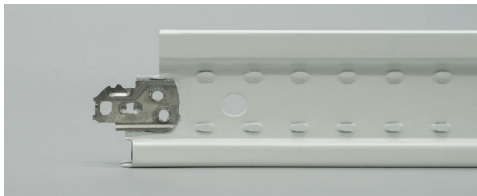


### 9/16" | 7/8" WALL ANGLE

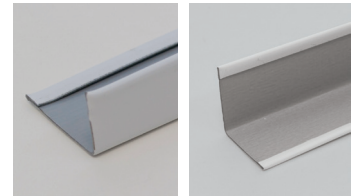


### FEATURES AND BENEFITS

- Narrow 9/16" face features a 1/8" center regress and is compatible with certain narrow reveal edge panels
- ICC Certified (ESR-3336) and City of Los Angeles Building Code compliant via ESR-3336 LABC Supplement
- Double-stitched web design for lasting durability and strength
- Intermediate- and heavy-duty certified profiles available for all seismic applications
- Grid features fully painted and G30 hot-dipped galvanized steel construction for corrosion resistance
- Mitered design on cross tee and main runner intersections produces a clean, continuous slot with multiple lengths and miter spacing to accommodate many module sizes
- EZ Stab clip technology allows for a fast and strong connection on cross tees with added removability
- Available in Standard White. Additional color options are offered through our Post-Paint process. See the Visual Options - Suspension Systems page for color option details.


### MAIN RUNNER



### WALL ANGLE

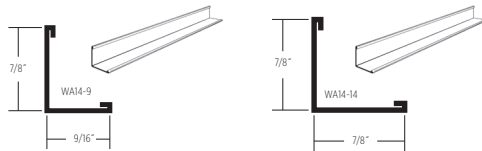

### SHADOW MOLDING

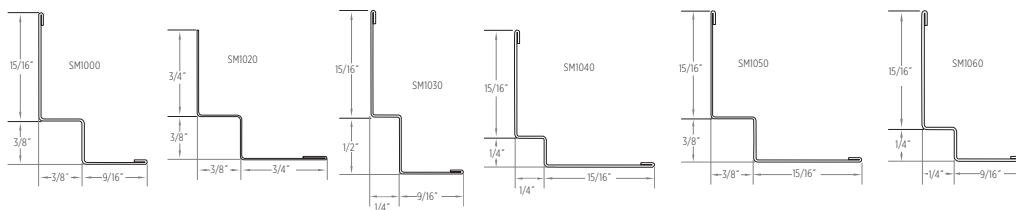

LEED® v4		
RECYCLED CONTENT		
<b>MAIN RUNNER</b>		
PRE: 19%	POST: 68-69%	TOTAL: 87-88%
<b>CROSS TEE</b>		
PRE: 19%	POST: 69%	TOTAL: 88%
<input checked="" type="checkbox"/>	MR: PBT Source Reduction (Healthcare)	
<input type="checkbox"/>	MR: Material Ingredients (HPDs)	
<input checked="" type="checkbox"/>	MR: Sourcing Raw Materials	
<input type="checkbox"/>	MR: Environmental Product Declarations (EPDs)	
<input checked="" type="checkbox"/>	MR: Construction and Demolition Waste Management Planning	



LEED® is a registered trademark of the U.S. Green Building Council.

**Declare**<sup>SM</sup>  
Living Building Challenge Red List Free®  
Declare<sup>SM</sup> is a service mark of  
The International Living Future Institute

# 9/16" EZ STAB BOLT SLOT SYSTEM - 1/8" REVEAL

## Acoustical Suspension Systems

### CATALOG NUMBER BREAKDOWNS

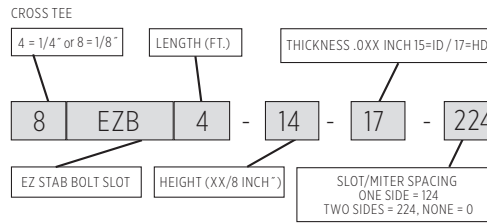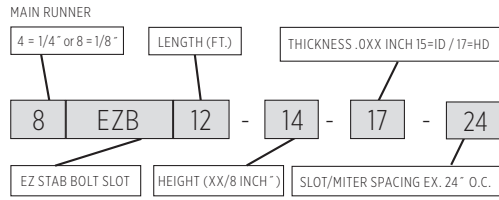

	Grid Face (in.)	Dimensions (in.)	Slot Spacing (in.)	Pieces/carton	Ft./carton	Seismic Design Category	Structural Classification (ASTM C635)	Recycled Content PRE*	Recycled Content POST*	Recycled Content TOTAL*	Allowable Uniform Load (plf)	Allowable Concentrated Load at midspan (lbf)**
<b>MAIN RUNNER</b>												
8EZB12-14-17-24	9/16	144 x 1-3/4 x 9/16	24 O.C.	20	240	A-F	HD	19%	69%	88%	16.1	40.2
8EZB12-14-17-48	9/16	144 x 1-3/4 x 9/16	48 O.C.	20	240	A-F	HD	19%	69%	88%	16.1	40.2
8EZB12-14-15-24	9/16	144 x 1-3/4 x 9/16	24 O.C.	20	240	A-C	ID	19%	68%	87%	13.0	32.5
8EZB12-14-15-48	9/16	144 x 1-3/4 x 9/16	48 O.C.	20	240	A-C	ID	19%	68%	87%	13.0	32.5
8EZB10-14-17-20	9/16	120 x 1-3/4 x 9/16	20 O.C.	20	200	A-F	HD	19%	69%	88%	16.1	40.2
8EZB10-14-17-30	9/16	120 x 1-3/4 x 9/16	30 O.C.	20	200	A-F	HD	19%	69%	88%	16.1	40.2
8EZB10-14-15-20	9/16	120 x 1-3/4 x 9/16	20 O.C.	20	200	A-C	ID	19%	68%	87%	13.0	32.5
8EZB10-14-15-30	9/16	120 x 1-3/4 x 9/16	30 O.C.	20	200	A-C	ID	19%	68%	87%	13.0	32.5
<b>CROSS TEE</b>												
8EZB1.7-14-15-0	9/16	20 x 1-3/4 x 9/16	—	50	83	—	—	—	—	—	115.8	96.5
8EZB2-14-17-0	9/16	24 x 1-3/4 x 9/16	—	50	100	—	HD	19%	69%	88%	96.8	96.8
8EZB2-14-15-0	9/16	24 x 1-3/4 x 9/16	—	50	100	—	—	—	—	—	74.7	74.7
8EZB2.5-14-15-0	9/16	30 x 1-3/4 x 9/16	—	50	125	—	—	—	—	—	48.9	61.1
8EZB4-14-15-0	9/16	48 x 1-3/4 x 9/16	—	50	200	—	—	—	—	—	13.0	32.5
8EZB4-14-15-224	9/16	48 x 1-3/4 x 9/16	24 O.C. (both sides)	50	200	—	—	—	—	—	13.0	32.5
8EZB4-14-15-124	9/16	48 x 1-3/4 x 9/16	24 O.C. (one side only)	50	200	—	—	—	—	—	13.0	32.5
8EZB4-14-17-0	9/16	48 x 1-3/4 x 9/16	—	50	200	—	HD	19%	69%	88%	16.1	40.2
8EZB4-14-17-224	9/16	48 x 1-3/4 x 9/16	24 O.C. (both sides)	50	200	—	HD	19%	69%	88%	16.1	40.2
8EZB4-14-17-124	9/16	48 x 1-3/4 x 9/16	24 O.C. (one side only)	50	200	—	HD	19%	69%	88%	16.1	40.2
8EZB5-14-15-0	9/16	60 x 1-3/4 x 9/16	—	20	100	—	—	—	—	—	7.6	23.8
8EZB5-14-15-230	9/16	60 x 1-3/4 x 9/16	30 O.C. (both sides)	20	100	—	—	—	—	—	7.6	23.8
8EZB5-14-15-220	9/16	60 x 1-3/4 x 9/16	20, 40 O.C. (both sides)	20	100	—	—	—	—	—	7.6	23.8
8EZB5-14-15-120	9/16	60 x 1-3/4 x 9/16	20, 40 O.C. (one side only)	20	100	—	—	—	—	—	7.6	23.8
<b>WALL ANGLE</b>												
WA14-9	9/16	144 x 7/8 x 9/16	—	40	480	—	—	19%	69%	88%	—	—
WA14-14	7/8	144 x 7/8 x 7/8	—	40	480	—	—	19%	69%	88%	—	—
WA32-32	2	120 x 2 x 2	—	20	200	—	—	19%	69%	88%	—	—
WA32-32-12	2	144 x 2 x 2	—	20	240	—	—	19%	69%	88%	—	—
WA32-15	2	120 x 15/16 x 2	—	20	200	—	—	19%	69%	88%	—	—
WA32-15-12	2	144 x 15/16 x 2	—	20	240	—	—	19%	69%	88%	—	—
<b>SHADOW MOLDING</b>												
SM1000	—	120 x 15/16 x 3/8 x 3/8 x 9/16	—	40	400	—	—	19%	69%	88%	—	—
SM1020†	—	120 x 3/4 x 3/8 x 3/8 x 3/4	—	40	400	—	—	19%	69%	88%	—	—
SM1030	—	120 x 15/16 x 1/2 x 1/4 x 9/16	—	40	400	—	—	9%	44%	53%	—	—
SM1040	—	120 x 15/16 x 1/4 x 1/4 x 15/16	—	40	400	—	—	9%	44%	53%	—	—
SM1050	—	120 x 15/16 x 3/8 x 3/8 x 15/16	—	40	400	—	—	9%	44%	53%	—	—
SM1060	—	120 x 15/16 x 1/4 x 1/4 x 9/16	—	40	400	—	—	9%	44%	53%	—	—

†SM1020 is not hemmed along 3/4" side







\*Maximum recycled content percentage. Recycled content varies by manufacturing location.

\*\*Allowable concentrated loads at midspan are determined in accordance with AC308 Section 3.2. For each framing member, the allowable concentrated load must not be combined with the allowable uniform load. Use Standard 9/16" Wall Angle and Shadow Molding

# 9/16" EZ STAB BOLT SLOT SYSTEM - 1/8" REVEAL

## Acoustical Suspension Systems

### ACCESSORIES

		Item Number	Product Name	Dimensions L' x W" x H" (mm)	Color	Pieces/ carton	Lbs./ carton
SEISMIC		CTSPC-2	Seismic Perimeter Clip	3-1/16 x 2-1/4 x 1-1/16 (78 x 58 x 27)	Metal	100	9
		CTSTJ	Seismic Transition Joint Clip	3-1/2 x 3-1/2 x 1-3/16 (89 x 89 x 31)	Metal	100	10
		SLEEVE1/8	1/8" Bolt Slot Seismic Sleeve	3 x 9/16 x 5/16 (76.2 x 14.3 x 7.9)	White	100	1
BOLT SLOT		BSNC18	1/8" Bolt Slot Notch Cover - White notch cover for 1/8" EZ Stab Bolt Slot Systems	1-1/2" x 1/4" x 11/32" (38 x 6 x 9)	White	100	1
		HW12	Hanger Wire 12' (3660 mm) 12 Gage (2.05 mm)	144 x 12 gage x 12 gage (3658 x 12 gage x 12 gage)	Metal	141	50
		SFYK	SmartFit Yoke	8.55 x 1.25 x 9.56 (217 x 32 x 243)	Metal	20	9

### PHYSICAL DATA

#### MATERIAL

Fully painted and hot dipped galvanized steel (G30)

#### FACE DIMENSION

9/16"

#### CROSS TEE/MAIN RUNNER INTERFACE

Mitered

#### LOAD CLASSIFICATION

Heavy duty and Intermediate duty per ASTM C635

#### SURFACE FINISH

Fully Painted

#### PROFILE HEIGHT

1-3/4"

#### END DETAIL

Main Runner: Integral Stab  
Cross Tee: Staked-on Stab Clip

#### SEISMIC RATING

A, B, C, D, E, F

#### WARRANTY

10-year Limited Suspension Systems warranty increases to 15 years when installed with CertainTeed ceiling panels. Full warranty information can be found at [certainteed.com/ceilings](http://certainteed.com/ceilings).

### SEISMIC PERFORMANCE

#### MAIN RUNNERS:

8EZB12-14-17-24, 8EZB12-14-17-48,  
8EZB10-14-17-20, 8EZB10-14-17-30,  
8EZB12-14-15-24, 8EZB12-14-15-48,  
8EZB10-14-15-20, 8EZB10-14-15-30

#### MINIMUM LBS. TO PULLOUT COMPRESSION/TENSION:

180 lbs.

#### CROSS TEES:

8EZB2-14-17-0, 8EZB4-14-17-0,  
8EZB2-14-17-224, 8EZB2-14-17-124,  
8EZB1.7-14-15-0, 8EZB2-14-15-0,  
8EZB2.5-14-15-0, 8EZB4-14-15-224,  
8EZB4-14-15-124, 8EZB5-14-15-0,  
8EZB5-14-15-230, 8EZB5-14-15-220,  
8EZB5-14-15-120

### ICC EVALUATION SERVICE, INC., REPORT COMPLIANCE

Suspension systems manufactured by CertainTeed ceilings have been reviewed and are approved by listing in ICC-ES Evaluation Report ESR-3336. CertainTeed suspension systems have been reviewed and are approved by listing in the City of Los Angeles Building Code ESR-3336 LABC Supplement. Evaluation Reports are subject to reexamination, revision and possible cancellation. Refer to [certainteed.com/ceilings](http://certainteed.com/ceilings) for current reports.

# VISUAL OPTIONS - SUSPENSION SYSTEMS


## ACOUSTICAL AND DRYWALL SUSPENSION SYSTEMS AND TERMINUS TRIM

Our newly expanded post-paint process allows for any CertainTeed Suspension System product to be painted in a variety of new colors, matching all CertainTeed colors along with any Sherwin-Williams® colors requested by the customer. We can also match any color if a color sample is provided.


### CertainTeed Standard



### Ecophon®

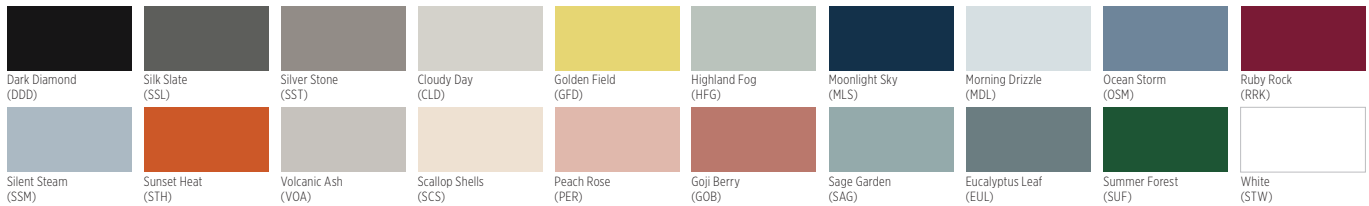

### Techstyle Color

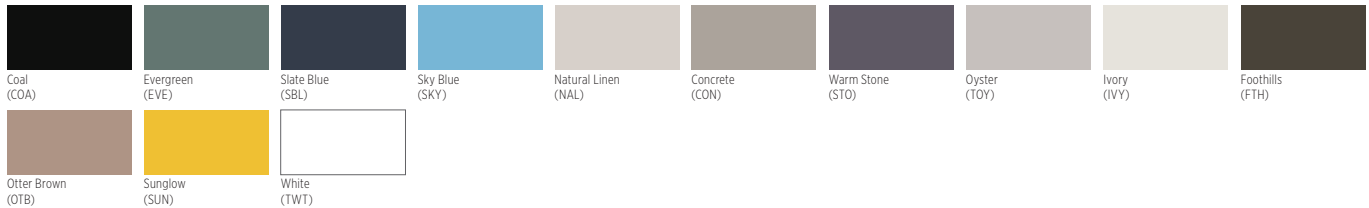

### Techstyle Wood



### Techstyle Felt

### Metal Ceilings



For Special color options, contact your local sales representative.

The colors shown have been reproduced with all the fidelity possible with commercial printing processes. Also, a specific color may appear different on one class of product than another.


When placing an order for either Standard or Special colors, please use the following naming process preceding each catalog code:

- Standard face paint: ST + 3-letter color code
- Standard 360 paint: 3T + 3-letter color code
- Special face page: SP + 3-letter color code
- Special 360 paint: 3P + 3-letter color code

#### Example:

EZCS4-12-12 ST WEC

#### Example: EZCS4-12-12 ST WEC

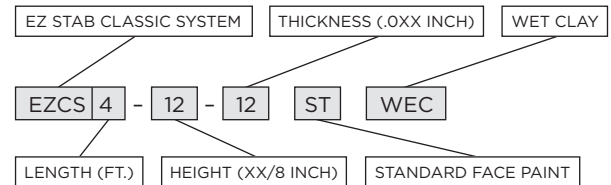

## CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS  
 20 Moores Road, Malvern, PA 19355 800-387-3809 CertainTeed.com/Architectural