

9/16" EZ STAB ELITE NARROW SYSTEM


Acoustical Suspension Systems

The slim face width complements modern design and offers flexibility and added strength.


MAIN RUNNER



CROSS TEE

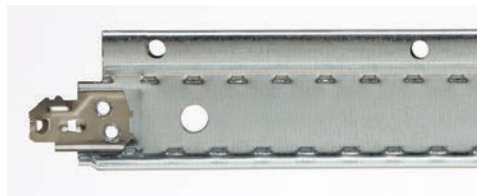

9/16" | 7/8" WALL ANGLE

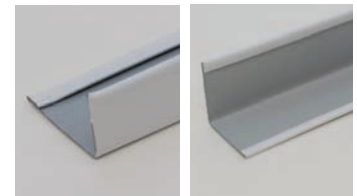

FEATURES AND BENEFITS

- Increased frequency (3" O.C.) of patented Latitude Holes™ provides installation flexibility
- Narrow style 9/16" (15 mm) face complements narrow reveal edge panels
- EZ Stab clip technology allows for a fast and strong connection on cross tees with added removability
- Centering tabs prevent gaps around the edge, seating trim panels within the grid opening
- Enhanced stitching increases stiffness, reducing bending or twisting
- Suitable for all seismic applications
- ICC certified (ESR-3336) and City of Los Angeles Building Code compliant via ESR-3336 LABC Supplement
- Grid features G30 hot-dipped galvanized steel web construction for corrosion resistance
- Intermediate- and heavy-duty load-bearing capabilities/classification
- Available in standard white and black; 360-degree colors also available

LEED® v4

RECYCLED CONTENT

MAIN RUNNER

PRE: 25% POST: 34-35% TOTAL: 59-60%

CROSS TEE

PRE: 24-25% POST: 34-36% TOTAL: 59-60%

WALL ANGLE

PRE: 19% POST: 69% TOTAL: 88%

SHADOW MOLDING

PRE: 9-19% POST: 44-69% TOTAL: 53-88%

MR: PBT Source Reduction (Healthcare)

MR: Material Ingredients (HPDs)


MR: Sourcing Raw Materials

MR: Environmental Product Declarations (EPDs)


MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.


MAIN RUNNERS



WALL ANGLE

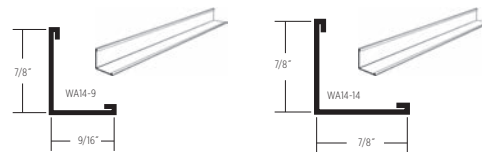

SHADOW MOLDING

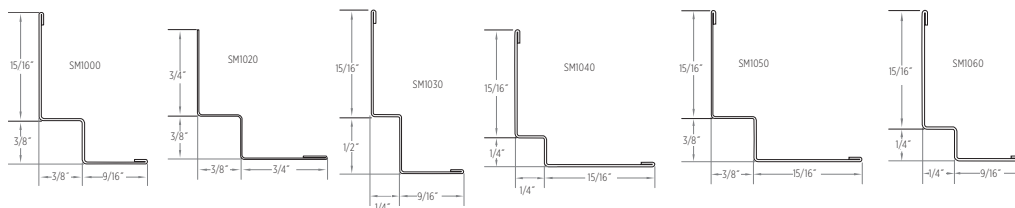

9/16" EZ STAB ELITE NARROW SYSTEM

Acoustical Suspension Systems

| | Grid Face (in.) | Dimensions (in.) | Slot Spacing (in.) | Pieces/ carton | Ft./ carton | Seismic Design Category | Structural Classification (ASTM C635) | Recycled Content PRE* | Recycled Content POST* | Recycled Content TOTAL* | Allowable Uniform Load (plf) | Allowable Concentrated Load at midspan (lbf)** |
|-----------------------|-----------------|---------------------------------|--------------------|----------------|-------------|-------------------------|---------------------------------------|-----------------------|------------------------|-------------------------|------------------------------|--|
| MAIN RUNNER | | | | | | | | | | | | |
| EZES12-12-18 | 9/16 | 144 x 1-1/2 x 9/16 | 6 O.C. | 20 | 240 | A-C | ID | 25% | 35% | 60% | 13.15 | 32.88 |
| EZES12-12-19 | 9/16 | 144 x 1-11/16 x 9/16 | 6 O.C. | 20 | 240 | A-F | HD | 25% | 34% | 59% | 17.97 | 44.93 |
| CROSS TEE | | | | | | | | | | | | |
| EZES0.5-12-12 | 9/16 | 6 x 1-1/2 x 9/16 | — | 60 | 30 | — | — | 25% | 34% | 39% | — | — |
| EZES1-12-12 | 9/16 | 12 x 1-1/2 x 9/16 | — | 60 | 60 | — | — | 25% | 34% | 59% | — | — |
| EZES2-12-12 | 9/16 | 24 x 1-1/2 x 9/16 | — | 60 | 120 | — | — | 24% | 36% | 60% | 27.97 | 34.96 |
| EZES2-12-19 | 9/16 | 24 x 1-11/16 x 9/16 | — | 60 | 120 | — | HD | 25% | 34% | 59% | 17.97 | 44.93 |
| EZES2.5-12-12 | 9/16 | 30 x 1-1/2 x 9/16 | — | 60 | 150 | — | — | 24% | 36% | 60% | — | — |
| EZES4-12-12 | 9/16 | 48 x 1-1/2 x 9/16 | 12 O.C. | 60 | 240 | — | — | 24% | 36% | 60% | 8.44 | 21.09 |
| EZES4-12-19 | 9/16 | 48 x 1-11/16 x 9/16 | 12 O.C. | 60 | 240 | — | HD | 25% | 34% | 59% | 17.97 | 44.93 |
| EZES5-12-12 | 9/16 | 60 x 1-1/2 x 9/16 | 12 O.C. | 20 | 100 | — | — | 24% | 36% | 60% | — | — |
| EZES5-12-12-5s | 9/16 | 60 x 1-1/2 x 9/16 | 6,20,30,40,54 | 20 | 100 | — | — | 24% | 36% | 60% | — | — |
| EZES6-12-12 | 9/16 | 72 x 1-1/2 x 9/16 | 12 O.C. | 20 | 120 | — | — | 24% | 36% | 60% | — | — |
| EZES8-12-12 | 9/16 | 96 x 1-1/2 x 9/16 | 12 O.C. | 20 | 160 | — | — | 24% | 36% | 60% | — | — |
| WALL ANGLE | | | | | | | | | | | | |
| WA14-9 | 9/16 | 144 x 7/8 x 9/16 | — | 40 | 480 | — | — | 19% | 69% | 88% | — | — |
| WA14-14 | 7/8 | 144 x 7/8 x 7/8 | — | 40 | 480 | — | — | 19% | 69% | 88% | — | — |
| WA14-14-10 | 7/8 | 120 x 7/8 x 7/8 | — | 40 | 400 | — | — | 19% | 69% | 88% | — | — |
| WA32-32 | 2 | 120 x 2 x 2 | — | 20 | 200 | — | — | 19% | 69% | 88% | — | — |
| WA32-32-12 | 2 | 144 x 2 x 2 | — | 20 | 240 | — | — | 19% | 69% | 88% | — | — |
| WA32-15 | 2 | 120 x 15/16 x 2 | — | 20 | 200 | — | — | 19% | 69% | 88% | — | — |
| WA32-15-12 | 2 | 144 x 15/16 x 2 | — | 20 | 240 | — | — | 19% | 69% | 88% | — | — |
| SHADOW MOLDING | | | | | | | | | | | | |
| SM1000 | — | 120 x 15/16 x 3/8 x 3/8 x 9/16 | — | 40 | 400 | — | — | 19% | 69% | 88% | — | — |
| SM1020 [†] | — | 120 x 3/4 x 3/8 x 3/8 x 3/4 | — | 40 | 400 | — | — | 19% | 69% | 88% | — | — |
| SM1030 | — | 120 x 15/16 x 1/2 x 1/4 x 9/16 | — | 40 | 400 | — | — | 9% | 44% | 53% | — | — |
| SM1040 | — | 120 x 15/16 x 1/4 x 1/4 x 15/16 | — | 40 | 400 | — | — | 9% | 44% | 53% | — | — |
| SM1050 | — | 120 x 15/16 x 3/8 x 3/8 x 15/16 | — | 40 | 400 | — | — | 9% | 44% | 53% | — | — |
| SM1060 | — | 120 x 15/16 x 1/4 x 1/4 x 9/16 | — | 40 | 400 | — | — | 9% | 44% | 53% | — | — |








[†]SM1020 is not hemmed along 3/4" side

*Maximum recycled content percentage. Recycled content varies by manufacturing location.

**Allowable concentrated loads at midspan are determined in accordance with AC308 Section 3.2. For each framing member, the allowable concentrated load must not be combined with the allowable uniform load.

To specify Main Runners, Cross Tees, Wall Angles or Shadow Molding in black, order by item number followed by BLK. Example EZES12-12-18 BLK

ACCESSORIES

| | Item Number | Product Name | Dimensions L" x W" x H" (mm) | Color | Pieces/ carton | Lbs./ carton |
|----------|---|--|---|-------|----------------|--------------|
| SEISMIC |  SLEEVE916 | 9/16" Sleeve | 4 x 9/16 x 1/64 (102 x 15 x 1) | White | 100 | 1 |
| |  CTSPC-2 | Seismic Perimeter Clip | 3-1/16 x 2-1/4 x 1-1/16 (78 x 58 x 27) | Metal | 100 | 9 |
| |  CTSTJ | Seismic Transition Joint Clip | 3-1/2 x 3-1/2 x 1-3/16 (89 x 89 x 31) | Metal | 100 | 10 |
| STANDARD |  AHD | Adjustable Hold Down Clip | 1-1/8 x 1/2 x 1-11/16 (29 x 13 x 43) | Black | 1000 | 16 |
| |  HW12 | Hanger Wire 12' (3660 mm) 12 Gage (2.05 mm) | 144 x 12 gage x 12 gage (3658 x 12 gage x 12 gage) | Metal | 141 | 50 |
| |  EZSLOTTER | Slot Punch | 11 x 3-1/4 x 1 (280 x 83 x 26) | Metal | 1 | 2.5 |
| |  SFYK | SmartFit Yoke | 8.55 x 1.25 x 9.56 (217 x 32 x 243) | Metal | 20 | 9 |

9/16" EZ STAB ELITE NARROW SYSTEM

Acoustical Suspension Systems

PHYSICAL DATA

MATERIAL

Hot dipped galvanized steel (G30)

FACE DIMENSION

9/16"

CROSS TEE/MAIN RUNNER INTERFACE

Stepped-end/Override

SEISMIC RATING

A, B, C, D, E, F

LOAD CLASSIFICATION

Heavy duty and Intermediate duty per ASTM C635

SURFACE FINISH

Painted Steel Cap

PROFILE HEIGHT

ID: 1-1/2"

HD: 1-11/16"

END DETAIL

Main Runner: Integral Stab

Cross Tee: Staked-on Stab Clip

WARRANTY

10-year Limited Suspension Systems warranty increases to 15 years when installed with CertainTeed ceiling panels. Full warranty information can be found at certainteed.com/ceilings.

SEISMIC PERFORMANCE

MAIN RUNNERS:

EZES12-12-18, EZES12-12-19

MINIMUM LBS. TO PULLOUT

COMPRESSION/TENSION:
180 lbs.

CROSS TEES:

EZES2-12-12, EZES4-12-12,
EZES2-12-19, EZES4-12-19

ICC EVALUATION SERVICE, INC., REPORT COMPLIANCE

Suspension systems manufactured by CertainTeed ceilings have been reviewed and are approved by listing in ICC-ES Evaluation Report ESR-3336. CertainTeed suspension systems have been reviewed and are approved by listing in the City of Los Angeles Building Code ESR-3336 LABC Supplement. Evaluation Reports are subject to reexamination, revision and possible cancellation. Refer to certainteed.com/ceilings for current reports.



CertainTeed

CEILINGS • DECKING • FENCE • GYPSUM • INSULATION • RAILING • ROOFING • SIDING • TRIM
20 Moores Road Malvern, PA 19355 Professional: 800-233-8990 Consumer: 800-782-8777 certainteed.com

9/16" EZ STAB ELITE NARROW SYSTEM

Acoustical Suspension Systems

