


## CT™ 20 Shingles

### PRODUCT INFORMATION

CertainTeed offers a variety of three-tab shingle products that combine exceptional durability with flexibility for better resistance to blow-off. In addition to their suitability for residential applications, these products are ideal for commercial applications. CT™ 20 shingles are available in “English” dimensions only – 12" x 36".

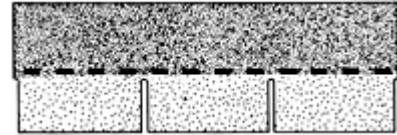

**Colors:** Please refer to the product brochure or CertainTeed website for the colors available in your region.

**Limitations:** Use on roofs with slopes greater than 2" per foot. Low slope applications (2:12 to < 4:12) require additional underlayment. In areas where icing along the eaves can cause a backup of water, apply CertainTeed WinterGuard® Waterproofing Shingle Underlayment, or its equivalent, according to application instructions provided with the product and on the shingle package.

On slopes greater than 21" per foot, apply a spot of roofing cement under each shingle tab corner according to application instructions provided on the shingle package.

**Product Composition:** These shingles are composed of a fiber glass mat base. Ceramic-coated mineral granules are tightly embedded in carefully refined, water-resistant asphalt. These shingles have self-sealing adhesive. These are 3-tab shingles.

### Applicable Standards:

ASTM D3018 Type I

ASTM D3462

ASTM E108 Class A Fire Resistance

ASTM D3161 Class F Wind Resistance

ASTM D7158 Class H Wind Resistance

UL 790 Class A Fire Resistance

ICC-ES ESR-1389 and ESR-3537

Florida Product Approval # FL5444

Miami-Dade Product Control Approved

Meets TDI Windstorm Requirements

### CT 20 – English

Weight/Square (approx.):	190-195 lb
Dimensions (overall):	12" x 36"
Shingles/Square:	80
Weather Exposure:	5"

### **INSTALLATION**

Detailed installation instructions are supplied on each bundle of strip shingles and must be followed. Separate application sheets may also be obtained from CertainTeed.

**Hips and Ridges:** Use field shingles of a like color for capping hips and ridges.

### **MAINTENANCE**

These shingles do not require maintenance when installed according to manufacturer's application instructions. However, to protect the investment, any roof should be routinely inspected at least once a year. Older roofs should be looked at more frequently.

### **WARRANTY**

CT 20 shingles carry a 20 year limited transferable warranty to the consumer against manufacturing defects when applied to stated CertainTeed application instructions for this product. All of these shingles carry 3-year SureStart protection. For specific warranty details and limitations, refer to the warranty itself (available from the local supplier, roofing contractor or on-line at [www.certainteed.com](http://www.certainteed.com)).

### **FOR MORE INFORMATION**

Sales Support Group: 800-233-8990

Web site: [www.certainteed.com](http://www.certainteed.com)

See us at our on-line specification writing tool, CertaSpec, at [www.certainteed.com/certaspec](http://www.certainteed.com/certaspec).