

# 9/16" EZ STAB BOLT SLOT SYSTEM - 1/8" REVEAL


Acoustical Suspension Systems

The EZ Stab Bolt Slot System provides increased strength and stability for easier ceiling grid installation.


## MAIN RUNNER



## CROSS TEE

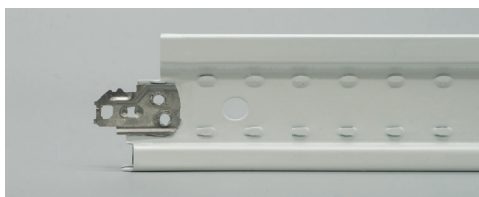

## 9/16" WALL ANGLE



## FEATURES AND BENEFITS

- Narrow 9/16" face features a 1/8" center regress and is compatible with certain narrow reveal edge panels
- ICC certified (ESR-3336) and compliant with L.A. Research Report number 25978
- Double-stitched web design for lasting durability and strength
- Intermediate- and heavy-duty certified profiles available for all seismic applications
- Grid features fully painted and G30 hot-dipped galvanized steel construction for corrosion resistance
- Mitered design on cross tee and main runner intersections produces a clean, continuous slot with multiple lengths and miter spacing to accommodate many module sizes
- EZ Stab clip technology allows for a fast and strong connection on cross tees with added removability
- Available in standard white only (consult your Sales Representative about custom colors)

## LEED® v4

### RECYCLED CONTENT

#### MAIN RUNNER

PRE: 19% POST: 68-69% TOTAL: 87-88%

#### CROSS TEE

PRE: 19% POST: 69% TOTAL: 88%

MR: PBT Source Reduction (Healthcare)

MR: Material Ingredients (HPDs)

MR: Sourcing Raw Materials



MR: Environmental Product Declarations (EPDs)

MR: Construction and Demolition Waste Management Planning


**Declare**<sup>SM</sup>  
Living Building Challenge Red List Free\*

## MAIN RUNNER

## WALL ANGLE




## SHADOW MOLDING

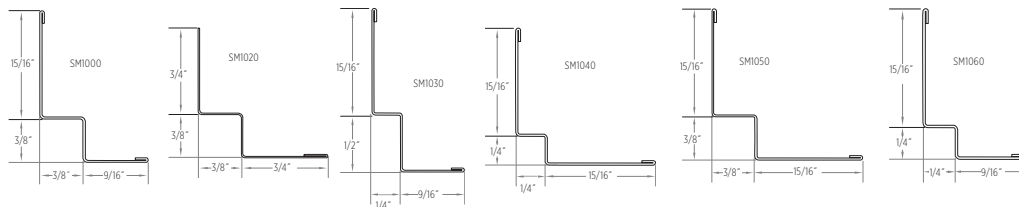

# 9/16" EZ STAB BOLT SLOT SYSTEM - 1/8" REVEAL

## Acoustical Suspension Systems

### CATALOG NUMBER BREAKDOWNS

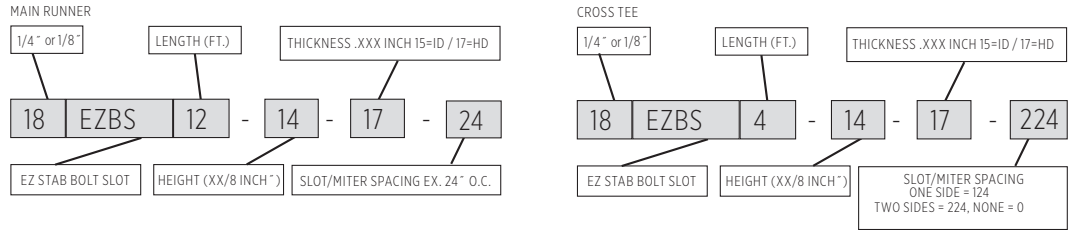

	Grid Face (in.)	Dimensions (in.)	Slot Spacing (in.)	Pieces/carton	Ft./carton	Seismic Design Category	Structural Classification (ASTM C635)	Recycled Content PRE*	Recycled Content POST*	Recycled Content TOTAL*	Allowable Uniform Load (plf)	Allowable Concentrated Load at midspan (lbf)**
<b>MAIN RUNNER</b>												
18EZBS12-14-17-24	9/16	144 x 1-3/4 x 9/16	24 O.C.	20	240	A-F	HD	19%	69%	88%	16.1	40.2
18EZBS12-14-17-48	9/16	144 x 1-3/4 x 9/16	48 O.C.	20	240	A-F	HD	19%	69%	88%	16.1	40.2
18EZBS12-14-15-24	9/16	144 x 1-3/4 x 9/16	24 O.C.	20	240	A-C	ID	19%	68%	87%	13.0	32.5
18EZBS12-14-15-48	9/16	144 x 1-3/4 x 9/16	48 O.C.	20	240	A-C	ID	19%	68%	87%	13.0	32.5
18EZBS10-14-17-20	9/16	120 x 1-3/4 x 9/16	20 O.C.	20	200	A-F	HD	19%	69%	88%	16.1	40.2
18EZBS10-14-17-30	9/16	120 x 1-3/4 x 9/16	30 O.C.	20	200	A-F	HD	19%	69%	88%	16.1	40.2
18EZBS10-14-15-20	9/16	120 x 1-3/4 x 9/16	20 O.C.	20	200	A-C	ID	19%	68%	87%	13.0	32.5
18EZBS10-14-15-30	9/16	120 x 1-3/4 x 9/16	30 O.C.	20	200	A-C	ID	19%	68%	87%	13.0	32.5
<b>CROSS TEE</b>												
18EZBS1.67-14-15-00	9/16	20 x 1-3/4 x 9/16	—	50	83	—	—	—	—	—	115.8	96.5
18EZBS2-14-17-00	9/16	24 x 1-3/4 x 9/16	—	50	100	—	HD	19%	69%	88%	96.8	96.8
18EZBS2-14-15-00	9/16	24 x 1-3/4 x 9/16	—	50	100	—	—	—	—	—	74.7	74.7
18EZBS2.5-14-15-00	9/16	30 x 1-3/4 x 9/16	—	50	125	—	—	—	—	—	48.9	61.1
18EZBS4-14-15-00	9/16	48 x 1-3/4 x 9/16	—	50	200	—	—	—	—	—	13.0	32.5
18EZBS4-14-15-224	9/16	48 x 1-3/4 x 9/16	24 O.C. (both sides)	50	200	—	—	—	—	—	13.0	32.5
18EZBS4-14-15-124	9/16	48 x 1-3/4 x 9/16	24 O.C. (one side only)	50	200	—	—	—	—	—	13.0	32.5
18EZBS4-14-17-00	9/16	48 x 1-3/4 x 9/16	—	50	200	—	HD	19%	69%	88%	16.1	40.2
18EZBS4-14-17-224	9/16	48 x 1-3/4 x 9/16	24 O.C. (both sides)	50	200	—	HD	19%	69%	88%	16.1	40.2
18EZBS4-14-17-124	9/16	48 x 1-3/4 x 9/16	24 O.C. (one side only)	50	200	—	HD	19%	69%	88%	16.1	40.2
18EZBS5-14-15-00	9/16	60 x 1-3/4 x 9/16	—	50	250	—	—	—	—	—	7.6	23.8
18EZBS5-14-15-230	9/16	60 x 1-3/4 x 9/16	30 O.C. (both sides)	50	250	—	—	—	—	—	7.6	23.8
18EZBS5-14-15-220	9/16	60 x 1-3/4 x 9/16	20, 40 O.C. (both sides)	50	250	—	—	—	—	—	7.6	23.8
18EZBS5-14-15-120	9/16	60 x 1-3/4 x 9/16	20, 40 O.C. (one side only)	50	250	—	—	—	—	—	7.6	23.8
<b>WALL ANGLE</b>												
WA14-9	9/16	144 x 7/8 x 9/16	—	40	480	—	—	19%	69%	88%	—	—
WA32-32	2	120 x 2 x 2	—	20	200	—	—	19%	69%	88%	—	—
WA32-32-12	2	144 x 2 x 2	—	20	240	—	—	19%	69%	88%	—	—
WA32-15	2	120 x 15/16 x 2	—	20	200	—	—	19%	69%	88%	—	—
WA32-15-12	2	144 x 15/16 x 2	—	20	240	—	—	19%	69%	88%	—	—
<b>SHADOW MOLDING</b>												
SM1000	—	120 x 15/16 x 3/8 x 3/8 x 9/16	—	40	400	—	—	19%	69%	88%	—	—
SM1020 <sup>†</sup>	—	120 x 3/4 x 3/8 x 3/8 x 3/4	—	40	400	—	—	19%	69%	88%	—	—
SM1030	—	120 x 15/16 x 1/2 x 1/4 x 9/16	—	40	400	—	—	9%	44%	53%	—	—
SM1040	—	120 x 15/16 x 1/4 x 1/4 x 15/16	—	40	400	—	—	9%	44%	53%	—	—
SM1050	—	120 x 15/16 x 3/8 x 3/8 x 15/16	—	40	400	—	—	9%	44%	53%	—	—
SM1060	—	120 x 15/16 x 1/4 x 1/4 x 9/16	—	40	400	—	—	9%	44%	53%	—	—

<sup>†</sup>SM1020 is not hemmed along 3/4" side






\*Maximum recycled content percentage. Recycled content varies by manufacturing location.

\*\*Allowable concentrated loads at midspan are determined in accordance with AC308 Section 3.2. For each framing member, the allowable concentrated load must not be combined with the allowable uniform load. Use Standard 9/16" Wall Angle and Shadow Molding

# 9/16" EZ STAB BOLT SLOT SYSTEM - 1/8" REVEAL

## Acoustical Suspension Systems

### ACCESSORIES

	Item Number	Product Name	Dimensions L' x W' x H' (mm)	Color	Pieces/ carton	Lbs./ carton
SEISMIC	 CTSPC-2	Seismic Perimeter Clip	3-1/16 x 2-1/4 x 1-1/16 (78 x 58 x 27)	Metal	100	9
	 CTSTJ	Seismic Transition Joint Clip	3-1/2 x 3-1/2 x 1-3/16 (89 x 89 x 31)	Metal	100	10
BOLT SLOT	 BSNC18	1/8" Bolt Slot Notch Cover - White notch cover for 1/8" EZ Stab Bolt Slot Systems	1-1/2" x 1/4" x 11/32" (38 x 6 x 9)	White	100	1
	 HW12	Hanger Wire 12" (3660 mm) 12 Gage (2.05 mm)	144 x 12 gage x 12 gage (3658 x 12 gage x 12 gage)	Metal	141	50
	 SFYK	SmartFit Yoke	8.55 x 1.25 x 9.56 (217 x 32 x 243)	Metal	20	9

### PHYSICAL DATA

#### MATERIAL

Fully painted and hot dipped galvanized steel (G30)

#### FACE DIMENSION

9/16"

#### CROSS TEE/MAIN RUNNER INTERFACE

Mitered

#### LOAD CLASSIFICATION

Heavy duty and Intermediate duty per ASTM C635

#### SURFACE FINISH

Fully Painted

#### PROFILE HEIGHT

1-3/4"

#### END DETAIL

Main Runner: Integral Stab  
Cross Tee: Staked-on Stab Clip

#### SEISMIC RATING

A, B, C, D, E, F

#### WARRANTY

10-year Limited Suspension Systems warranty increases to 15 years when installed with CertainTeed Ceiling Panels. Full warranty information can be found at [certainteed.com/ceilings](http://certainteed.com/ceilings).

### SEISMIC PERFORMANCE

#### MAIN RUNNERS:

18EZBS12-14-17-24, 18EZBS12-14-17-48,  
18EZBS10-14-17-20, 18EZBS10-14-17-30,  
18EZBS12-14-15-24, 18EZBS12-14-15-48,  
18EZBS10-14-15-20, 18EZBS10-14-15-30

#### MINIMUM LBS. TO PULLOUT

**COMPRESSION/TENSION:**  
180 lbs.

#### CROSS TEES:

18EZBS2-14-17-00, 18EZBS4-14-17-00,  
18EZBS2-14-17-224, 18EZBS2-14-17-124,  
18EZBS1.67-14-15-00, 18EZBS2-14-15-00,  
18EZBS2.5-14-15-00, 18EZBS4-14-15-224,  
18EZBS4-14-15-124, 18EZBS5-14-15-00,  
18EZBS5-14-15-230, 18EZBS5-14-15-220,  
18EZBS5-14-15-120

### ICC EVALUATION SERVICE, INC., REPORT COMPLIANCE

Suspension systems manufactured by CertainTeed Ceilings have been reviewed and are approved by listing in ICC-ES Evaluation Report ESR-3336. CertainTeed Ceilings suspension systems have been reviewed and are approved by listing in L.A. Research Report number 25978. Evaluation Reports are subject to reexamination, revision and possible cancellation. Refer to [certainteed.com/ceilings](http://certainteed.com/ceilings) for current reports.



Customer Support | [certainteed.com/ceilings](http://certainteed.com/ceilings) | 800-233-8990

LEED® is a registered trademark of the U.S. Green Building Council. Declare™ is a service mark of The International Living Future Institute © 9/19 CertainTeed Corporation