

SUSPENSION SYSTEMS


15/16" Classic Hook System



\$\$\$

TOOLS


Visit CertainTeed.com/Ceilings
Download Technical Brochures
LEED® Information / BIM Objects
3-Part Specs / Data Pages




MAIN RUNNER



CROSS TEE



15/16" WALL ANGLE

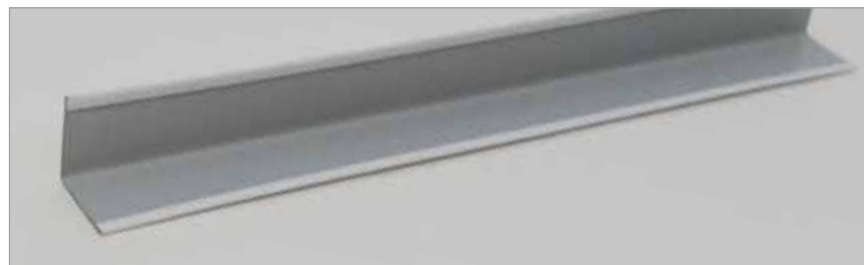


15/16" Wall Angle

The Classic Hook System features a 15/16" (24 mm) face width. This system incorporates hook-over cross tee end detail, designed to meet a variety of user needs and preferences.

FEATURES & BENEFITS

- Double web design for lasting durability and strength
- Cross tees feature hook-over end tab design for positive locking and easy removal
- Intermediate- and heavy-duty load-bearing capabilities
- Integral hook joinery featured on main runners for easy installation
- Cross tees feature a butt-cut end design
- Grid features G30 hot-dipped galvanized steel web construction for corrosion resistance
- Available in standard white and black
- Suitable for seismic applications (Seismic Design Categories A, B, C)
- High recycled content - 3rd party certified

AVAILABLE EDGE DETAILS





ATTRIBUTES

	DESCRIPTION	GRID FACE (INCHES)	DIMENSIONS (INCHES)	SLOT SPACING (INCHES)	STRUCTURAL CLASSIFICATION (ASTM C635)	RECYCLED CONTENT TOTAL	RECYCLED CONTENT PRE	RECYCLED CONTENT POST	SEISMIC DESIGN CATEGORY	PIECES PER CARTON	FEET PER CARTON
15/16" CLASSIC HOOK SYSTEM											
CH12-12-15	Main Runner	15/16	144 x 1-1/2 x 15/16	6 O.C.	ID	61%	25%	36%	A-C	20	240
CH12-12-20	Main Runner	15/16	144 x 1-1/2 x 15/16	6 O.C.	HD	60%	25%	35%	A-C	20	240
CH2-12-12	Cross Tee	15/16	24 x 1-1/2 x 15/16	—	—	61%	24%	37%	—	60	120
CH4-12-12	Cross Tee	15/16	48 x 1-1/2 x 15/16	12 O.C.	—	61%	24%	37%	—	60	240
WA15-15	Wall Angle	15/16	144 x 15/16 x 15/16	—	—	88%	19%	69%	—	40	480
WA15-9	Wall Angle	9/16	144 x 15/16 x 9/16	—	—	88%	19%	69%	—	40	480
SM1000	Shadow Molding	—	120 x 3/4 x 3/8 x 3/8 x 9/16	—	—	88%	19%	69%	—	40	400
SM1020	Shadow Molding	—	120 x 15/16 x 3/8 x 3/8 x 3/4	—	—	88%	19%	69%	—	40	400

MAIN RUNNERS

