

Ecophon®

Focus™ Dg, Dg XL
VOC Compliant

LOW
VOC

\$\$\$\$

LEED® v4


LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content
Pre: **1%** | Post: **70%**


TOOLS

Visit CertainTeed.com/Ceilings
Download HPDs and EPDs
LEED® Information / BIM Objects
3-Part Specs / Data Pages

EPD®

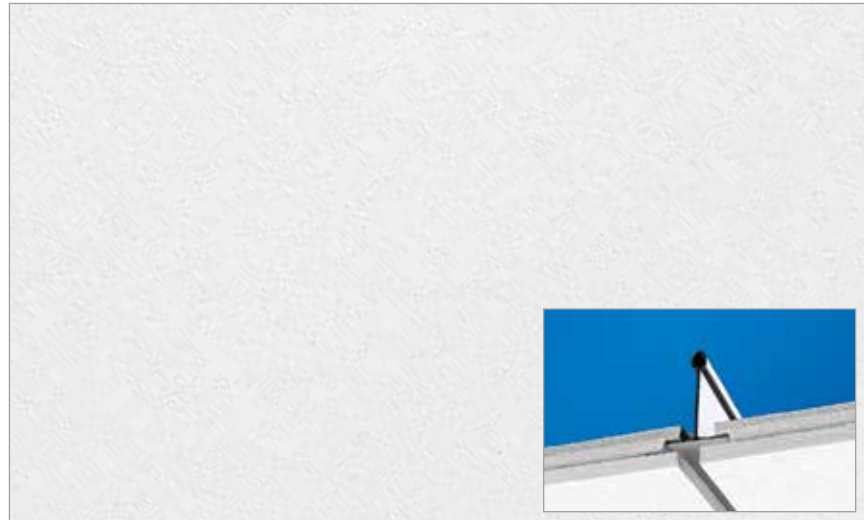

Akutex™ FT surface in White

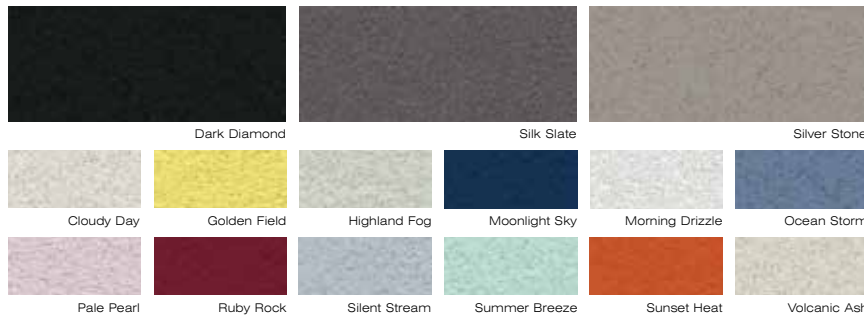


FEATURES & BENEFITS

- Exclusive 3RD™ technology combines high recycled glass content with a renewable plant-based binding agent, completely replacing traditional petroleum-based binding
- Semi-concealed, easy downward access
- Narrow gap between panels (5/16")
- Focus Wing accessory available for finishing of cloud perimeter
- Easy-to-clean Akutex FT surface in white finish has perfect light diffusion (+99%)
- Fully encapsulated with tissue backing for maximum performance
- Painted, damage-resistant concealed edges
- Available in 16 standard colors

APPLICATIONS

- Public Lobbies
- Open Plan Offices
- Healthcare (walls to deck)
- Galleries
- Libraries
- Doctors' Offices (walls to deck)
- Patient Rooms (walls to deck)
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS





Focus™ Dg Semi-concealed (3542 1560)

ATTRIBUTES

	DIMENSIONS (INCHES)	EDGE DETAIL	NRC	CAC	HPD AVAILABLE	EPD AVAILABLE	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
FOCUS™ DG													
3542 1560	24 x 24 x 3/4	Semi-concealed	0.90	—	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%
3542 1561	24 x 48 x 3/4	Semi-concealed	0.90	—	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%
3542 4239	30 x 30 x 3/4	Semi-concealed	0.90	—	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%
3542 1565	48 x 48 x 1	Semi-concealed	0.90	—	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%
FOCUS™ DG XL													
3542 1562	24 x 60 x 3/4	Semi-concealed	0.90	—	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%
3542 1563	24 x 72 x 3/4	Semi-concealed	0.90	—	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%
3542 1564	24 x 96 x 3/4	Semi-concealed	0.90	—	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%
FOCUS™ WING													
3549 1060 Straight Panel	48 x 8 x 2	Fully-concealed	—	—	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%
3549 1061 External Corner Kit	48 x 8 x 2 Mitered Corner	Fully-concealed	—	—	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%
3549 1062 Internal Corner Kit	48 x 8 x 2 Mitered Corner	Fully-concealed	—	—	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL
Fiberglass

ASTM E1264 CLASSIFICATION
Type XII, Form 2, Pattern G

FIRE CLASS (ASTM E1264)
Tested according to ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

VOC EMISSIONS
Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE
Fiberglass substrate is inherently resistant to the growth of mold and mildew.

MAINTENANCE
Wipe with a soft cloth or vacuum with brush attachment. Washable with mild detergent.

WARRANTY
10-year Ecophon® Warranty

Technical Support | certainteed.com/ceilings 800-233-8990

© 10/17 CertainTeed Corporation

CertainTeed
SAINT-GOBAIN
Ceilings