

Ecophon®

Focus™ A, Focus™ A XL
VOC Compliant

LOW
VOC

\$\$\$




LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content
Pre: **1%** | Post: **70%**


TOOLS

Visit CertainTeed.com/Ceilings
Download HPDs and EPDs
LEED® Information / BIM Objects
3-Part Specs / Data Pages

EPD®

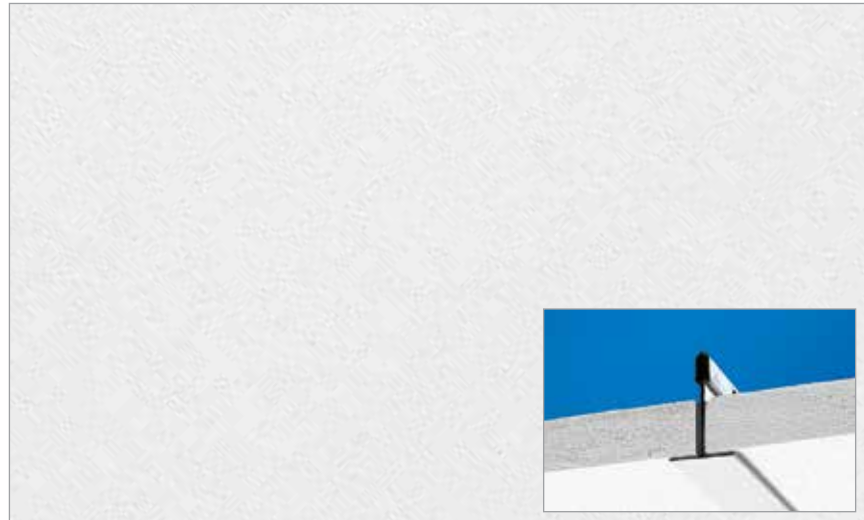

Akutex™ FT surface in White

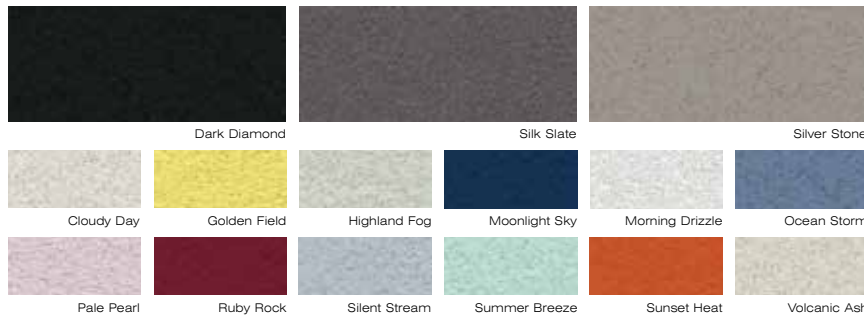

FEATURES & BENEFITS

- Exclusive 3RD™ technology combines high recycled glass content with a renewable plant-based binding agent, completely replacing traditional petroleum-based binding
- Extremely low particle emissions
- Easy-to-clean Akutex FT surface in white finish has perfect light diffusion (+99%)
- Fully encapsulated with tissue backing for maximum performance
- Primed, durable edges that resist damage from handling
- Available in 16 standard colors

APPLICATIONS

- Open Plan Offices
- Classrooms (walls to deck)
- Conference Rooms (walls to deck)
- Private Offices (walls to deck)
- Patient Rooms (walls to deck)
- Healthcare (walls to deck)
- Libraries
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS





Focus A™ Trim (3540 4607)

ATTRIBUTES

	DIMENSIONS (INCHES)	EDGE DETAIL	NRC	CAC	HPD AVAILABLE	EPD AVAILABLE	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
FOCUS™ A													
3540 4607	24 x 24 x 3/4	Trim	0.95	21	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%
3540 4608	24 x 48 x 3/4	Trim	0.95	21	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%
3540 4609	48 x 48 x 3/4	Trim	0.95	21	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%
FOCUS™ A XL													
3542 5067	24 x 60 x 3/4	Trim	0.95	21	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%
3542 5068	24 x 72 x 3/4	Trim	0.95	21	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%
3542 5069	24 x 96 x 3/4	Trim	0.95	21	—	Yes	Yes	Inherent	0.85	Yes	Class A	Certified	71%

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL
Fiberglass

ASTM E1264 CLASSIFICATION
Type XII, Form 2, Pattern G

FIRE CLASS (ASTM E1264)
Tested according to ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

VOC EMISSIONS
Independently certified compliant with California
Department of Public Health CDPH/EHLB/Standard
Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE
Fiberglass substrate is inherently resistant to the growth
of mold and mildew.

MAINTENANCE
Wipe with a soft cloth or vacuum with brush attachment.
Washable with mild detergent.

WARRANTY
10-year Ecophon® Warranty