

# Ecophon®

Akusto™ Wall C Super G  
VOC Compliant

LOW  
VOC

\$\$\$\$



LEED® v4


- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content  
Pre: 1% | Post: 70%

## TOOLS


Visit [CertainTeed.com/Ceilings](http://CertainTeed.com/Ceilings)  
Download HPDs and EPDs  
LEED® Information / BIM Objects  
3-Part Specs / Data Pages




**EPD®**

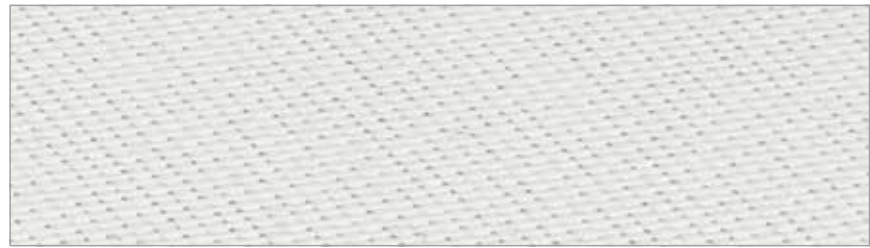

White

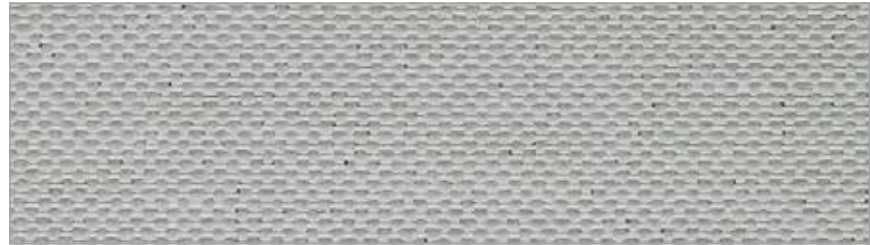

Grey

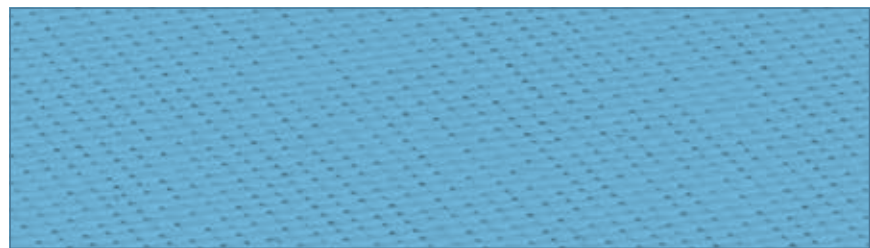

Blue


### FEATURES & BENEFITS

- Exclusive 3RD™ technology combines high recycled glass content with a renewable plant-based binding agent, completely replacing traditional petroleum-based binding
- Use as a complement and/or alternative to acoustical ceiling panels for excellent acoustical performance within a space
- High impact resistance
- Moisture resistant

### APPLICATIONS

- Classrooms
- Gymnasiums
- Multi-purpose Rooms
- Libraries
- Public Lobbies
- Other Commercial Buildings / Space Applications

### AVAILABLE EDGE DETAILS



Wall Panel  
2700 x 600 x 40



Akusto™ Wall C Super G Panels (White)

## ATTRIBUTES

	COLOR	DIMENSIONS (MM)	NRC	MOLD RESISTANT	LR	WASHABLE	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
<b>AKUSTO™ WALL C SUPER G PANELS</b>									
<b>3557 7729</b>	White	2700 x 600 x 40	0.95	Inherent	0.78	Yes	Class A	—	71%
<b>3557 7022</b>	Grey	2700 x 600 x 40	0.95	Inherent	0.38	Yes	Class A	—	71%
<b>3557 7027</b>	Blue	2700 x 600 x 40	0.95	Inherent	0.78	Yes	Class A	—	71%

**CAN'T FIND A SIZE?** Contact your local Sales Representative or call 800-233-8990

## PHYSICAL DATA

### MATERIAL

Fiberglass

### SIZE (IMPERIAL EQUIVALENT)

106" x 24" x 1.5"

### FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less.

### MOLD/MILDEW RESISTANCE

Fiberglass substrate is inherently resistant to the growth of mold and mildew.

### MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment. Washable with mild detergent.

### WARRANTY

10-year Ecophon® Warranty

Technical Support | [certainteed.com/ceilings](http://certainteed.com/ceilings) 800-233-8990

© 01/17 CertainTeed Corporation

**CertainTeed**  
SAINT-GOBAIN  
Ceilings