

# Gyptone®

BIG™ Curve  
 VOC Compliant

LOW  
 VOC

\$\$\$\$



LEED® v4

● MR: Environmental Product Declarations (EPDs)

● MR: Sourcing Raw Materials

● MR: Material Ingredients (HPDs)

○ IEQ: Daylight

● IEQ: Low-Emitting Materials

● IEQ: Prereq. Min. Acoustic Performance (Schools)

● IEQ: Acoustic Performance

● MR: PBT Source Reduction (Healthcare)

● IEQ: Interior Lighting

○ EA: Prereq. Min. Energy Performance

○ EA: Optimize Energy Performance

● Recycled Content  
 Pre: **80%** | Post: **5%**

### TOOLS


Visit [CertainTeed.com/Ceilings](http://CertainTeed.com/Ceilings)  
 Download HPDs and EPDs  
 LEED® Information / BIM Objects  
 3-Part Specs / Data Pages



**EPD®**



Line 6

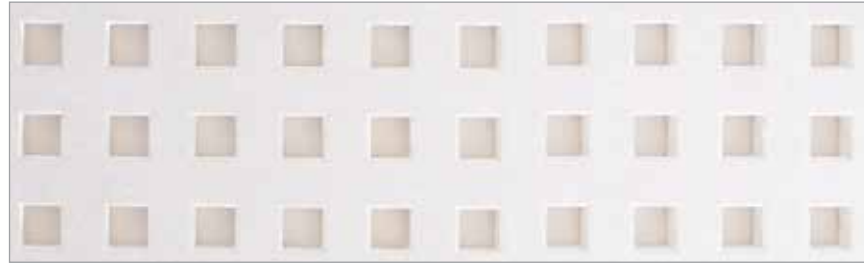

Quattro 41



Sixto 63

### FEATURES & BENEFITS

- Adaptable acoustics and design possibilities to surpass your imagination
- Available in three perforation patterns for screw-attached walls and ceilings
- Can be curved to a 10' radius (dry) and a 5' radius (wet)
- Smooth, paintable surface simplifies installation and maintenance, ensuring long, sustainable life
- Tapered edges for easy installation and finishing
- Health Product Declaration (HPD) available
- Meets seismic requirements
- Class A flame / smoke (ASTM E1264)
- Proprietary Saint-Gobain formaldehyde/VOC scavenging performance (inherent to all Gyptone products)
- Environmental Product Declaration (EPD) available











### APPLICATIONS

- Auditoriums
- Public Lobbies
- Offices
- Conference Rooms
- Airports
- Other Commercial Buildings / Space Applications



BIG™ Curve Line 6

## ATTRIBUTES

	DIMENSIONS (MM) (INCHES)	EDGE DETAIL	 NRC	 CAC	 HPD AVAILABLE	 EPD AVAILABLE	 LR	 HOLE SIZE (MM)	 PERFORATED AREA	 FIRE CLASS (ASTM E1264)	 LOW VOC	 RECYCLED CONTENT
<b>LINE 6</b>												
<b>5200609688</b>	1200 x 2400 x 6.5 (47.2 x 94.5 x 1/4)	Tapered / Trim	Ceiling: 0.60* Wall: 0.65*	35*	Yes	Yes	—	6 x 80	13%	Class A	Certified	85%
<b>QUATTRO 41</b>												
<b>5200609695</b>	1200 x 2400 x 6.5 (47.2 x 94.5 x 1/4)	Tapered / Trim	Ceiling: 0.70* Wall: 0.80*	35*	Yes	Yes	—	12	16%	Class A	Certified	85%
<b>SIXTO 63</b>												
<b>5200609700</b>	1200 x 2400 x 6.5 (47.2 x 94.5 x 1/4)	Tapered / Trim	Ceiling: 0.65* Wall: 0.70*	35*	Yes	Yes	—	12	15%	Class A	Certified	85%

\*When used with CertainTeed Sustainable™ Insulation unfaced 2-1/2" (R-8) as an overlay above the installed ceiling panel

†When used with CertainTeed Sustainable™ Insulation unfaced 2-1/2" in cavity

‡When used with CertainTeed Sustainable™ Insulation unfaced 3-1/2" (R-11) as an overlay above the panel

**CAN'T FIND A SIZE?** Contact your local Sales Representative or call 800-233-8990

## PHYSICAL DATA

**MATERIAL**  
Gypsum

**ASTM E1264 CLASSIFICATION**  
Type XX, Pattern A G

**FIRE CLASS (ASTM E1264)**  
Tested according to ASTM E84 & CAN S102  
Flame Spread: 25 or less  
Smoke Developed: 50 or less

**VOC EMISSIONS**  
Independently certified compliant with California  
Department of Public Health CDPH/EHLB/Standard  
Method Version 1.1, 2010.

**MAINTENANCE**  
Wipe with a soft cloth or vacuum with brush attachment.  
Painted surfaces can be cleaned with a damp cloth and  
mild detergent.