


Gyptone®

BIG™ Quattro 41
 VOC Compliant

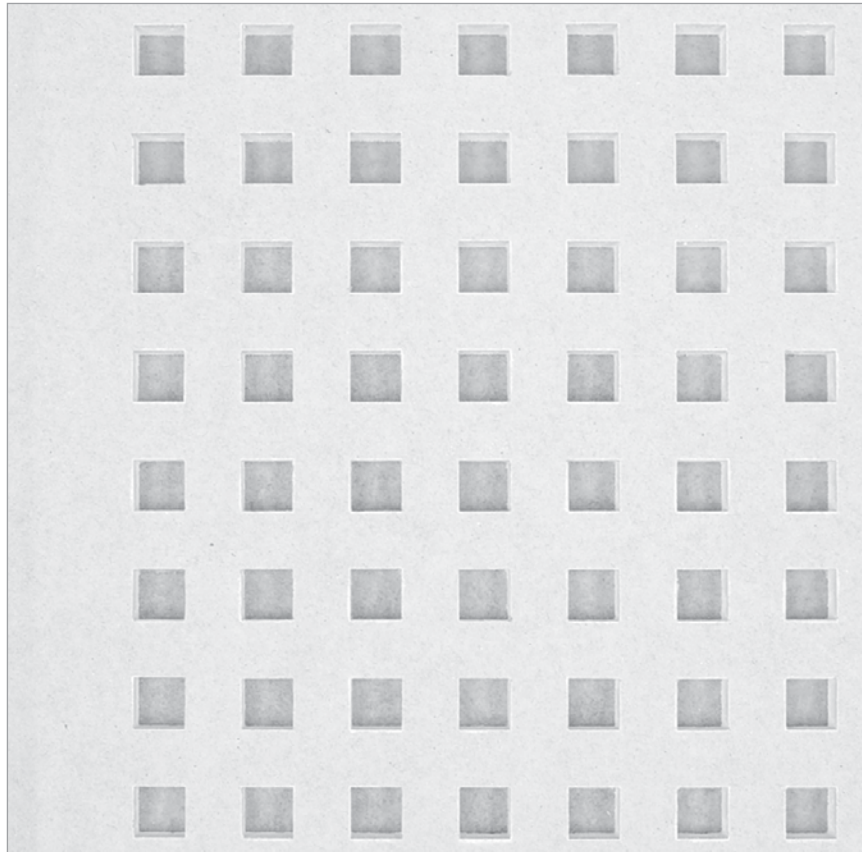

LOW
VOC

\$\$\$\$



LEED® v4

● MR: Environmental Product Declarations (EPDs)

● MR: Sourcing Raw Materials

● MR: Material Ingredients (HPDs)

○ IEQ: Daylight

● IEQ: Low-Emitting Materials

● IEQ: Prereq. Min. Acoustic Performance (Schools)

● IEQ: Acoustic Performance

● MR: PBT Source Reduction (Healthcare)

● IEQ: Interior Lighting

○ EA: Prereq. Min. Energy Performance

○ EA: Optimize Energy Performance

● Recycled Content
 Pre: **80%** | Post: **5%**

TOOLS

Visit CertainTeed.com/Ceilings
 Download HPDs and EPDs
 LEED® Information / BIM Objects
 3-Part Specs / Data Pages



HPD Available

EPD®

FEATURES & BENEFITS

- Smooth, paintable surface simplifies installation and maintenance, ensuring long, sustainable life
- Suitable for direct or suspended screw mounting (metric drywall grid available)
- Complementary Gyptone® ceiling panels available for each pattern
- Designed with four tapered edges for easy installation and finishing
- Health Product Declaration (HPD) available
- Class A flame / smoke (ASTM E1264)
- Proprietary Saint-Gobain formaldehyde/VOC scavenging performance (inherent to all Gyptone products)
- Environmental Product Declaration (EPD) available

APPLICATIONS

- Conference Rooms
- Classrooms
- Offices
- Airports
- Public Lobbies
- Other Commercial Buildings / Space Applications



BIG™ Quattro 41

ATTRIBUTES

DIMENSIONS (MM) (INCHES)	INSTALLATION LOCATION	NRC	CAC	HPD AVAILABLE	EPD AVAILABLE	LR	HOLE SIZE (MM)	PERFORATED AREA	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
--------------------------	-----------------------	-----	-----	---------------	---------------	----	----------------	-----------------	-------------------------	--------------------	------------------

BIG™ QUATTRO 41

5200605090	2400 x 1200 x 12.5 (94.5 x 47.2 x 1/2)	Ceiling Wall	0.70* 0.80*	35*	Yes	Yes	—	12	16%	Class A	Certified	85%
-------------------	---	-----------------	----------------	-----	-----	-----	---	----	-----	---------	-----------	-----

*When used with CertainTeed Sustainable™ Insulation unfaced 2-1/2" (R-8) as an overlay above the installed ceiling panel

*When used with CertainTeed Sustainable™ Insulation unfaced 2-1/2" (R-8) in cavity

*When used with CertainTeed Sustainable™ Insulation unfaced 3-1/2" (R-11) as an overlay above the panel
(Without insulation: NRC=0.55, CAC=17)

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

GYPTONE® BIG™ ACCESS PANELS



Gyptone® BIG™ access panels are quick to install and virtually invisible because the gap between the ceiling and the hatch is minimal. This fully integrated solution is available for most Gyptone® BIG patterns and allows for easy access to the plenum.

MATERIAL

Gypsum

ASTM E1264 CLASSIFICATION

Type XX, Pattern A G

FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

Painted surfaces can be cleaned with a damp cloth and mild detergent.

Technical Support | certainteed.com/ceilings 800-233-8990

© 01/17 CertainTeed Corporation

CertainTeed
SAINT-GOBAIN
Ceilings