


# Gyptone®

BIG™ Quattro 46  
 VOC Compliant

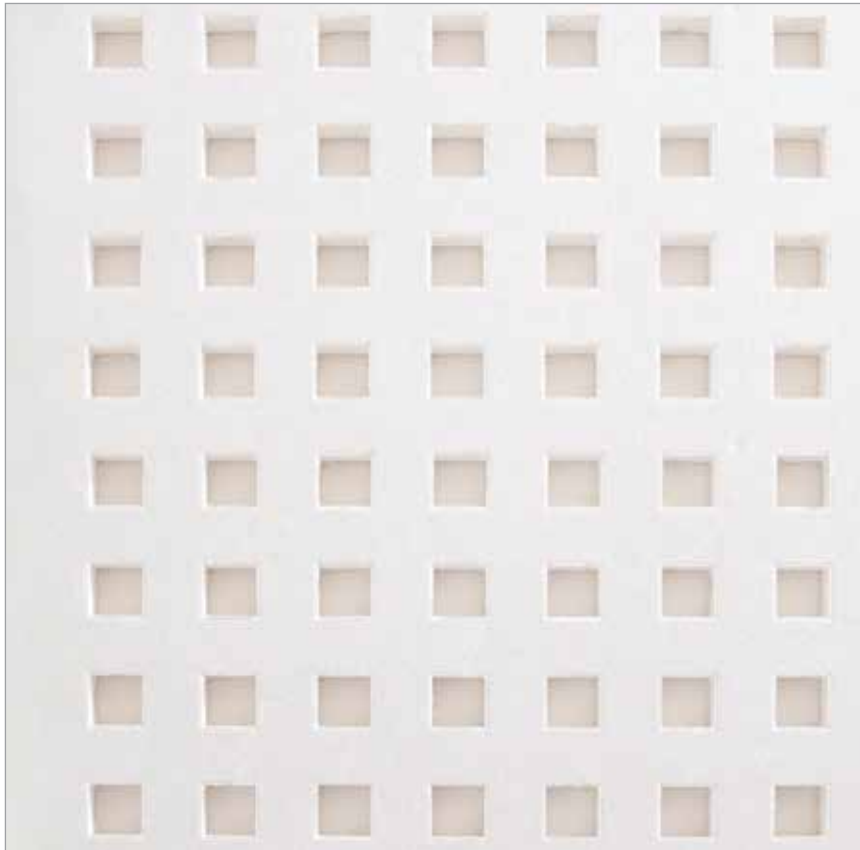

LOW  
VOC

\$\$\$\$



LEED® v4

● MR: Environmental Product Declarations (EPDs)

● MR: Sourcing Raw Materials

● MR: Material Ingredients (HPDs)

○ IEQ: Daylight

● IEQ: Low-Emitting Materials

● IEQ: Prereq. Min. Acoustic Performance (Schools)

● IEQ: Acoustic Performance

● MR: PBT Source Reduction (Healthcare)

● IEQ: Interior Lighting

○ EA: Prereq. Min. Energy Performance

○ EA: Optimize Energy Performance

● Recycled Content  
 Pre: **80%** | Post: **5%**

**TOOLS**

Visit [CertainTeed.com/Ceilings](http://CertainTeed.com/Ceilings)  
 Download HPDs and EPDs  
 LEED® Information / BIM Objects  
 3-Part Specs / Data Pages



HPD Available

**EPD®**

**FEATURES & BENEFITS**

- Smooth, paintable surface simplifies installation and maintenance, ensuring long, sustainable life
- Suitable for direct or suspended screw mounting (metric drywall grid available)
- Complementary Gyptone® ceiling panels available for each pattern
- Designed with tapered edges for easy installation and finishing
- Health Product Declaration (HPD) available
- Class A flame / smoke (ASTM E1264)
- Proprietary Saint-Gobain formaldehyde/VOC scavenging performance (inherent to all Gyptone products)
- Environmental Product Declaration (EPD) available

**APPLICATIONS**

- Conference Rooms
- Classrooms
- Offices
- Airports
- Public Lobbies
- Other Commercial Buildings / Space Applications



BIG™ Quattro 46

## ATTRIBUTES

DIMENSIONS (MM) (INCHES)	INSTALLATION LOCATION	NRC	CAC	HPD AVAILABLE	EPD AVAILABLE	LR	HOLE SIZE (MM)	PERFORATED AREA	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
--------------------------	-----------------------	-----	-----	---------------	---------------	----	----------------	-----------------	-------------------------	--------------------	------------------

### BIG™ QUATTRO 46

<b>5200545666</b>	2400 x 1200 x 12.5 (94.5 x 47.2 x 1/2)	Ceiling Wall	0.60* 0.60†	35*	Yes	Yes	—	12	10%	Class A	Certified	85%
-------------------	---	-----------------	----------------	-----	-----	-----	---	----	-----	---------	-----------	-----

\*When used with CertainTeed Sustainable™ Insulation unfaced 2-1/2" (R-8) as an overlay above the installed ceiling panel

†When used with CertainTeed Sustainable™ Insulation unfaced 2-1/2" (R-8) in cavity

\*When used with CertainTeed Sustainable™ Insulation unfaced 3-1/2" (R-11) as an overlay above the panel  
(Without insulation: NRC=0.55, CAC=17)

**CAN'T FIND A SIZE?** Contact your local Sales Representative or call 800-233-8990

## GYPTONE® BIG™ ACCESS PANELS



Gyptone® BIG™ access panels are quick to install and virtually invisible because the gap between the ceiling and the hatch is minimal. This fully integrated solution is available for most Gyptone® BIG patterns and allows for easy access to the plenum.

## PHYSICAL DATA

**MATERIAL**  
Gypsum

**ASTM E1264 CLASSIFICATION**  
Type XX, Pattern A G

**FIRE CLASS (ASTM E1264)**  
Tested according to ASTM E84 & CAN S102  
Flame Spread: 25 or less  
Smoke Developed: 50 or less

**VOC EMISSIONS**  
Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

**MAINTENANCE**  
Wipe with a soft cloth or vacuum with brush attachment. Painted surfaces can be cleaned with a damp cloth and mild detergent.

Technical Support | [certainteed.com/ceilings](http://certainteed.com/ceilings) 800-233-8990

© 01/17 CertainTeed Corporation

**CertainTeed**  
SAINT-GOBAIN  
Ceilings