


# Gyptone®

BIG™ Sixto 63  
 VOC Compliant

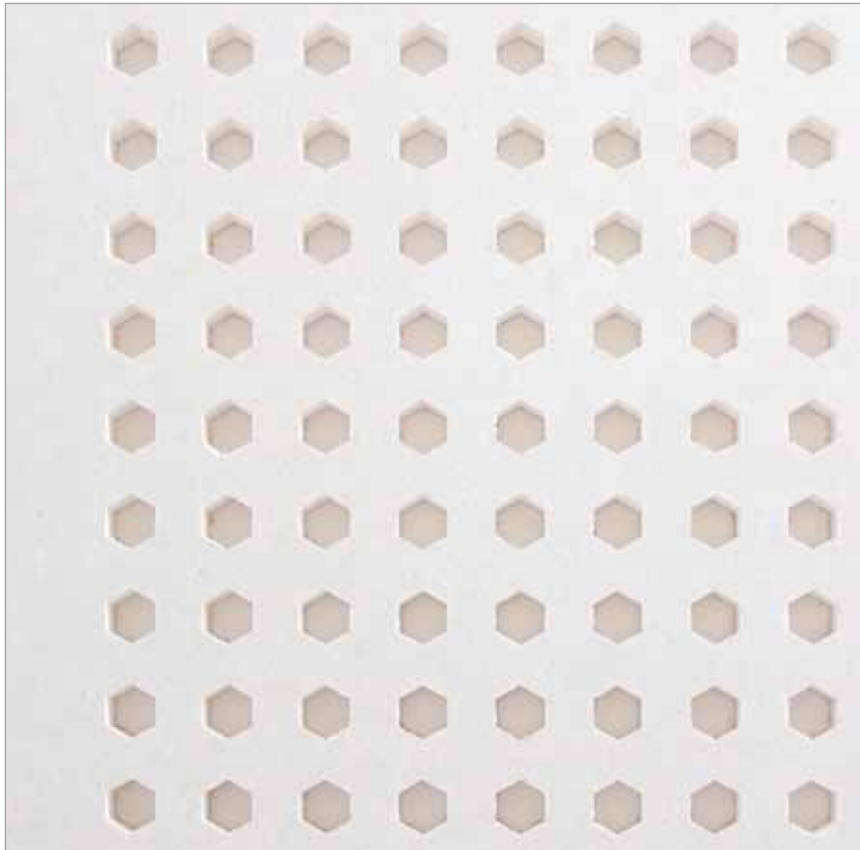

LOW  
VOC

\$\$\$\$



LEED® v4

● MR: Environmental Product Declarations (EPDs)

● MR: Sourcing Raw Materials

● MR: Material Ingredients (HPDs)

● IEQ: Daylight

● IEQ: Low-Emitting Materials

● IEQ: Prereq. Min. Acoustic Performance (Schools)

● IEQ: Acoustic Performance

● MR: PBT Source Reduction (Healthcare)

● IEQ: Interior Lighting

● EA: Prereq. Min. Energy Performance

● EA: Optimize Energy Performance

● Recycled Content  
 Pre: **80%** | Post: **5%**

**TOOLS**

Visit [CertainTeed.com/Ceilings](http://CertainTeed.com/Ceilings)  
 Download HPDs and EPDs  
 LEED® Information / BIM Objects  
 3-Part Specs / Data Pages



HPD Available

**FEATURES & BENEFITS**

- Smooth, paintable surface simplifies installation and maintenance, ensuring long, sustainable life
- Suitable for direct or suspended screw mounting (Metric Drywall grid available)
- Complementary Gyptone® ceiling panels available for each pattern
- Designed with tapered edges for easy installation and finishing
- Health Product Declaration (HPD) available

**APPLICATIONS**

- Conference Rooms
- Classrooms
- Offices
- Airports
- Public Lobbies
- Other Commercial Buildings / Space Applications



BIG™ Sixto 63 (ceiling)

## ATTRIBUTES

BIG™ SIXTO 63	DIMENSIONS (MM) (INCHES)	INSTALLATION LOCATION	NRC	CAC	HPD AVAILABLE	LR	HOLE SIZE (MM)	PERFORATED AREA	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
52005455808	2400 x 1200 x 12.5 94.5 x 47.2 x 1/2	Ceiling Wall	0.65* 0.70†	35*	Yes	—	12	15%	Class A	Certified	85%

\*When used with CertainTeed Sustainable™ Insulation unfaced 2-1/2" (R-8) as an overlay above the installed ceiling panel

†When used with CertainTeed Sustainable™ Insulation unfaced 2-1/2" (R-8) in cavity

\*When used with CertainTeed Sustainable™ Insulation unfaced 3-1/2" (R-11) as an overlay above the panel  
(Without insulation: NRC=0.60, CAC=17)

**CAN'T FIND A SIZE?** Contact your local Sales Representative or call 800-233-8990

## GYPTONE INSPECTION HATCHES



Gyptone® inspection hatches are quick to install and virtually invisible because the gap between the ceiling and the hatch is minimal. This fully integrated solution is available for most Gyptone® BIG™ patterns and allows for easy access to the plenum.

## PHYSICAL DATA

### MATERIAL

Gypsum

### ASTM E1264 CLASSIFICATION

Type XX, Pattern A G

### FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

### VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

### MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment. Painted surfaces can be cleaned with a damp cloth and mild detergent.

Technical Support | [certainteed.com/ceilings](http://certainteed.com/ceilings) 800-233-8990

© 09/15 CertainTeed Corporation

**CertainTeed**  
SAINT-GOBAIN  
Ceilings