


Gyptone®

BIG™ Sixto 65
 VOC Compliant

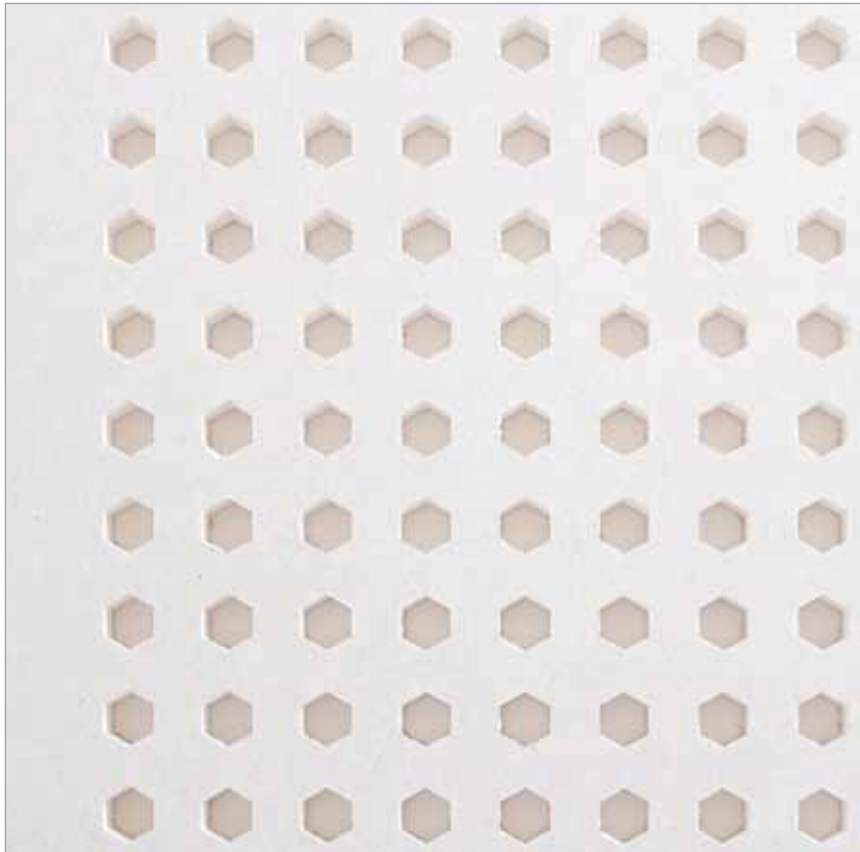

LOW
VOC

\$\$\$\$



LEED® v4

● MR: Environmental Product Declarations (EPDs)

● MR: Sourcing Raw Materials

● MR: Material Ingredients (HPDs)

● IEQ: Daylight

● IEQ: Low-Emitting Materials

● IEQ: Prereq. Min. Acoustic Performance (Schools)

● IEQ: Acoustic Performance

● MR: PBT Source Reduction (Healthcare)

● IEQ: Interior Lighting

● EA: Prereq. Min. Energy Performance

● EA: Optimize Energy Performance

● Recycled Content
 Pre: **80%** | Post: **5%**

TOOLS

Visit CertainTeed.com/Ceilings
 Download HPDs and EPDs
 LEED® Information / BIM Objects
 3-Part Specs / Data Pages



HPD Available

FEATURES & BENEFITS

- Smooth, paintable surface simplifies installation and maintenance, ensuring long, sustainable life
- Suitable for direct or suspended screw mounting (Metric Drywall grid available)
- Complementary Gyptone® ceiling panels available for each pattern
- Designed with tapered edges for easy installation and finishing
- Health Product Declaration (HPD) available










APPLICATIONS

- Conference Rooms
- Classrooms
- Offices
- Airports
- Public Lobbies
- Other Commercial Buildings / Space Applications



BIG™ Sixto 65 (wall)

ATTRIBUTES

BIG™ SIXTO 65	DIMENSIONS (MM) (INCHES)	INSTALLATION LOCATION	 NRC	 CAC	 HPD AVAILABLE	 LR	 HOLE SIZE (MM)	 PERFORATED AREA	 FIRE CLASS (ASTM E1264)	 EMISSION COMPLIANT	 RECYCLED CONTENT
52005607125	2700 x 900 x 12.5 106.3 x 35.4 x 1/2	Ceiling Wall	0.75* 0.85*	35*	Yes	—	12	17.6%	Class A	Certified	85%

*When used with CertainTeed Sustainable™ Insulation unfaced 2-1/2" (R-8) as an overlay above the installed ceiling panel

†When used with CertainTeed Sustainable™ Insulation unfaced 2-1/2" (R-8) in cavity

*When used with CertainTeed Sustainable™ Insulation unfaced 3-1/2" (R-11) as an overlay above the panel

(Without insulation: NRC=0.65, CAC=17)

Inspection hatches not available for Gyptone® BIG™ Sixto 65.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL

Gypsum

ASTM E1264 CLASSIFICATION

Type XX, Pattern A G

FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment. Painted surfaces can be cleaned with a damp cloth and mild detergent.

Technical Support | certainteed.com/ceilings 800-233-8990

© 09/15 CertainTeed Corporation

CertainTeed
SAINT-GOBAIN
Ceilings