


Gyptone®

LINE 4™
VOC Compliant

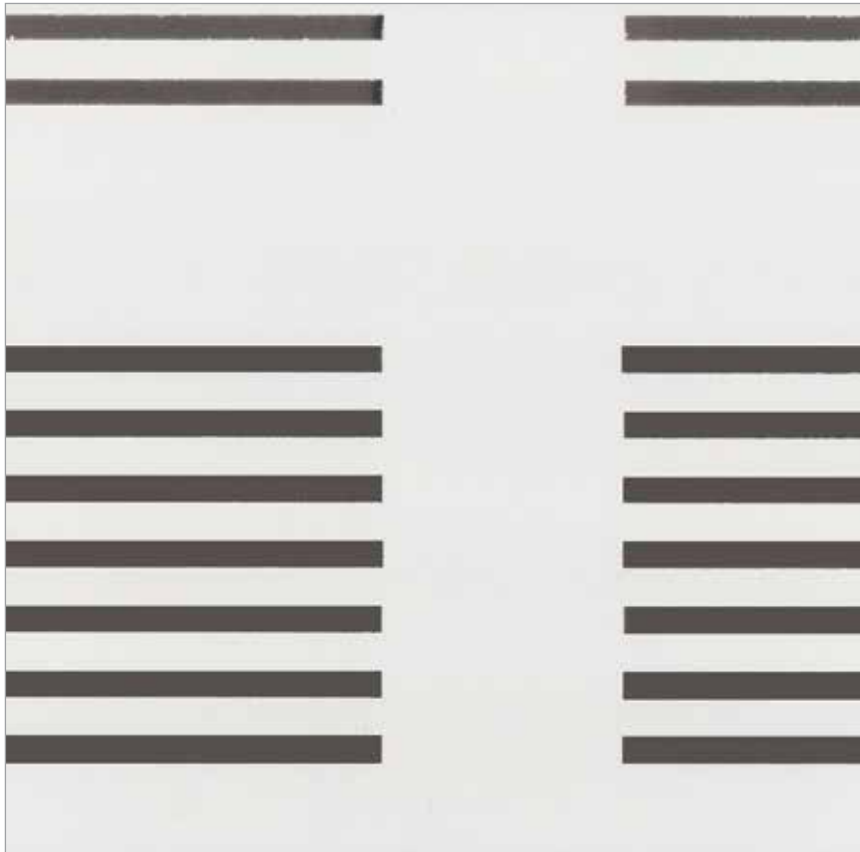

LOW
VOC

\$\$\$



LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content
Pre: **80%** | Post: **5%**

TOOLS

Visit CertainTeed.com/Ceilings
Download HPDs and EPDs
LEED® Information / BIM Objects
3-Part Specs / Data Pages



HPD Available

EPD®

FEATURES & BENEFITS

- Perforated gypsum panel
- Sound absorbent
- Smooth, paintable surface simplifies installation and maintenance, ensuring long, sustainable life
- Unique aesthetic appeal
- Certified low particle emissions
- Durable
- Easy plenum access
- Health Product Declaration (HPD) available
- Proprietary Saint-Gobain formaldehyde/VOC scavenging performance (inherent to all Gyptone products)
- Environmental Product Declaration (EPD) available

APPLICATIONS

- Stores
- Corridors
- Airports
- Schools
- Offices
- Atriums
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS



Trim
15/16 Grid



Narrow Reveal
(Corner Bevel)
9/16 Grid



LINE 4™ Trim

ATTRIBUTES

	DIMENSIONS (INCHES)	EDGE DETAIL	NRC*	CAC*	HPD AVAILABLE	EPD AVAILABLE	LR	HOLE SIZE (MM)	PERFORATED AREA	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
LINE 4™												
5200410258	24 x 24 x 1/2	Trim	0.70	35	Yes	Yes	0.70	6 x 95	17%	Class A	Certified	85%
5200410261	24 x 24 x 1/2	Narrow Reveal	0.70	35	Yes	Yes	0.70	6 x 95	17%	Class A	Certified	85%

*NRC and CAC values when used with CertainTeed Sustainable™ Insulation in unfaced 3-1/2" (R-11) as an overlay above the installed panel
(Without insulation: NRC=0.60, CAC=17)

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL

Gypsum

ASTM E1264 CLASSIFICATION

Type XX, Pattern A G

FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California
Department of Public Health CDPH/EHLB/Standard
Method Version 1.1, 2010.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.
Painted surfaces can be cleaned with a damp cloth and
mild detergent.

Technical Support | certainteed.com/ceilings 800-233-8990

© 01/17 CertainTeed Corporation

CertainTeed
SAINT-GOBAIN
Ceilings