


PERFORMA®

Envirogard™
 VOC Compliant

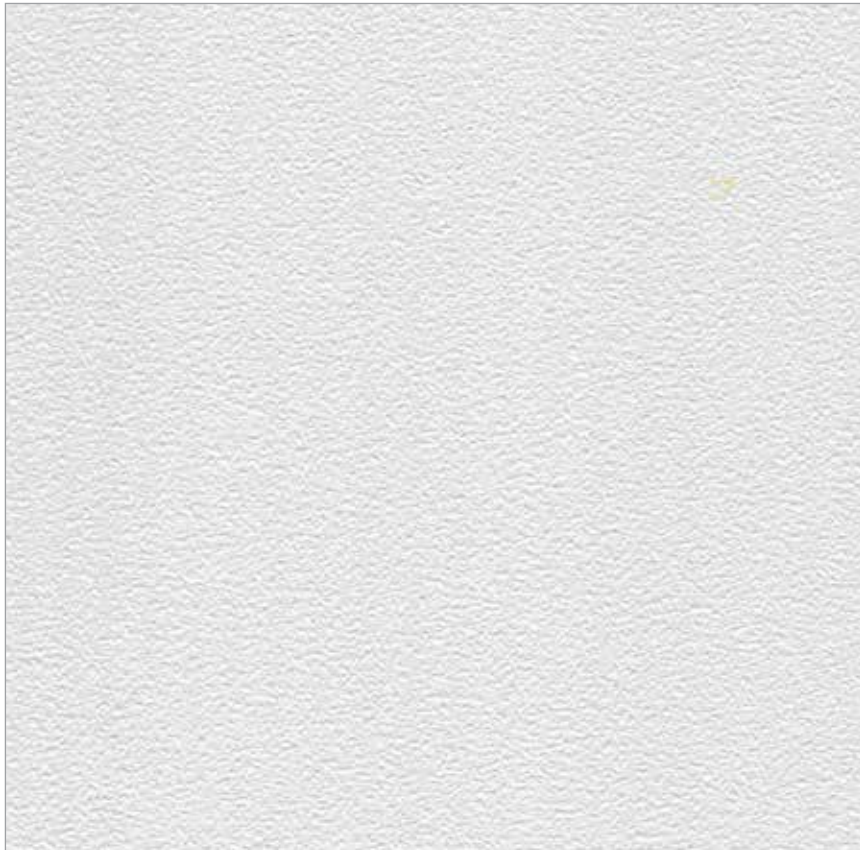

LOW
VOC

\$\$\$

LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content

TOOLS

Visit CertainTeed.com/Ceilings
 Download HPDs and EPDs
 LEED® Information / BIM Objects
 3-Part Specs / Data Pages

FEATURES & BENEFITS

- Gypsum core with vinyl facing, vinyl backing and sealed edges
- Wash tested to 2,000+ cycles with no sign of wear
- Surface suitable for cleaning with common disinfecting/sanitizing chemicals
- Exceeds FGI guidelines for cleanability in healthcare spaces
- Satisfies USDA/FSIS guidelines for sanitary applications
- Approved for use in federally registered Canadian food establishments
- Suitable clean room component to ISO Class 5

APPLICATIONS

- Food Preparation Areas
- Treatment Rooms
- Laboratories
- Clean Room Environments
- Sterile Environments
- Photo-Processing
- Other Commercial Buildings / Space Applications











AVAILABLE EDGE DETAILS



Trim
 15/16 Grid



Envirogard™ Trim (1190-CRF-1)

	DIMENSIONS (INCHES)	EDGE DETAIL	 NRC	 CAC	 SAG RESISTANT	 MOLD RESISTANT	 LR	 WASHABLE	 WASHABLE WITH SANITIZING CHEMICALS	 FIRE CLASS (ASTM E1264)	 LOW VOC EMISSION COMPLIANT	 RECYCLED CONTENT
ENVIROGARD™												
1192-CRF-1	24 x 24 x 1/2	Trim	—	38	Yes	—	0.78	Yes	Yes	Class A	Certified	0%
1190-CRF-1	24 x 48 x 1/2	Trim	—	40	Yes	—	0.78	Yes	Yes	Class A	Certified	0%

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

MATERIAL

Gypsum

ASTM E1264 CLASSIFICATION

Type XX, Pattern G

FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California
Department of Public Health CDPH/EHLB/Standard
Method Version 1.1, 2010.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.
Cleanable with sanitizing chemicals.

WARRANTY

10-year 104/90 Limited Warranty

INSTALLATION CONSIDERATION

Should be installed with an environmental suspension system.
See Suspension Systems, page 245.