


# PERFORMA®

Symphony® g  
 VOC Compliant

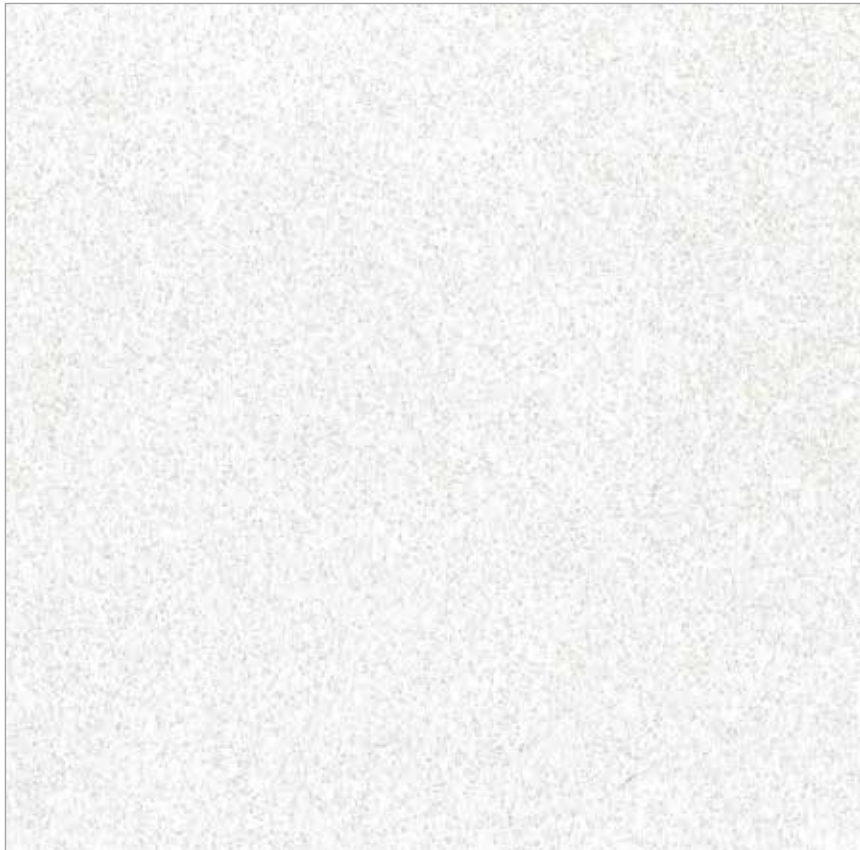

LOW  
 VOC

\$\$\$

**LEED® v4**

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content

**TOOLS**

Visit [CertainTeed.com/Ceilings](http://CertainTeed.com/Ceilings)  
 Download HPDs and EPDs  
 LEED® Information / BIM Objects  
 3-Part Specs / Data Pages

The Symphony line provides a complete line of ultra-durable acoustic solutions with a consistent, smooth ceiling visual. Combine Symphony, Adagio and TufCore products for targeted acoustics within the same space.

**FEATURES & BENEFITS**

- Gypsum core with reinforced mat face
- High light reflectance enhances conventional lighting, which can reduce fatigue and eye strain
- High CAC blocks unwanted noise from adjoining spaces
- Surface washability exceeds 1,000 cycles with sanitizing chemicals
- Certified VOC compliant
- Alternative to PVC-faced gypsum panels

**APPLICATIONS**

- Auditoriums
- Offices (with other Symphony Products)
- Closed Plan Areas
- Healthcare (with other Symphony Products)
- Other Commercial Buildings / Space Applications

**AVAILABLE EDGE DETAILS**



Trim  
 15/16 Grid



Symphony® g IOF Trim (1112-IOF-1)

**ATTRIBUTES**

|                    | DIMENSIONS (INCHES) | EDGE DETAIL | NRC | CAC | SAG RESISTANT | MOLD RESISTANT | LR   | WASHABLE | WASHABLE WITH SANITIZING CHEMICALS | FIRE CLASS (ASTM E1264) | EMISSION COMPLIANT | RECYCLED CONTENT |
|--------------------|---------------------|-------------|-----|-----|---------------|----------------|------|----------|------------------------------------|-------------------------|--------------------|------------------|
| <b>SYMPHONY® G</b> |                     |             |     |     |               |                |      |          |                                    |                         |                    |                  |
| <b>1112-IOF-1</b>  | 24 x 24 x 1/2       | Trim        | —   | 40  | Yes           | —              | 0.90 | Yes      | Yes                                | Class A                 | Certified          | 0%               |
| <b>1110-IOF-1</b>  | 24 x 48 x 1/2       | Trim        | —   | 42  | Yes           | —              | 0.90 | Yes      | Yes                                | Class A                 | Certified          | 0%               |

**CAN'T FIND A SIZE?** Contact your local Sales Representative or call 800-233-8990

**PHYSICAL DATA**

**MATERIAL**

Gypsum

**ASTM E1264 CLASSIFICATION**

Type XX, Pattern E

**FIRE CLASS (ASTM E1264)**

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

**VOC EMISSIONS**

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

**MAINTENANCE**

IOF Finish: Clean panel using a sponge/cloth dampened with water and mild liquid detergent solution. Do not soak panel. Cleanable with sanitizing chemicals.

**WARRANTY**

10-year 104/90 Limited Warranty

Technical Support | [certainteed.com/ceilings](http://certainteed.com/ceilings) 800-233-8990

© 01/17 CertainTeed Corporation

