



Noise-Reducing Gypsum Board

Product Data and Submittal

Product Description

SilentFX® QuickCut™ Noise-Reducing Gypsum Board is specifically designed to reduce airborne sound transmission between two adjoining spaces when used in wall or floor/ceiling assemblies. SilentFX QuickCut features a viscoelastic polymer that dampens sound energy. Application of the viscoelastic polymer between two specially formulated dense gypsum cores results in a combination that significantly improves sound attenuation and is ideal for systems requiring high STC performance. Commercial acoustic systems featuring SilentFX QuickCut provide STC ratings of 50 and up. In addition to providing exceptional acoustic performance, this functionally superior board is engineered to score and snap for faster installation and lower labor costs.

Basic Uses

1/2" SilentFX QuickCut Gypsum Board is intended for use on interior walls in residential, commercial or institutional applications. 5/8" SilentFX QuickCut Type X Gypsum Board is intended for use on interior walls and ceilings in residential, commercial or institutional applications. They can be used for new construction or renovations over wood or steel framing. It is typically nailed or screwed to studs spaced 16" (400 mm) or 24" (610 mm) o.c.

Advantages

- Features viscoelastic polymer for superior noise damping.
- SilentFX QuickCut systems improve sound attenuation with STC ratings of 50 and higher.
- High STC ratings with fewer layers of gypsum board than traditional assemblies.
- Abuse resistant per ASTM C1629.
- M2Tech technology provides additional zone of protection against moisture and mold.
- Achieves best possible score of 10 for mold resistance per ASTM D3273*.
- Finishes like standard gypsum board.
- Regular and Type X products available.

Limitations

- Avoid exposure to water or excessive moisture during transportation, storage, handling, during or after installation. Good design and construction practices that prevent water and moisture exposure of building products are the most effective strategy to avoid the growth of mold.
- 1/2" (12.7 mm) SilentFX QuickCut is not recommended for ceiling applications.
- Not recommended for exterior application.

- SilentFX QuickCut Gypsum Boards are not recommended for areas which will be continuously wet or subjected to high humidity such as tub and shower enclosures behind tile, saunas, steam rooms or gang showers.
- Not recommended for continuous exposure to temperatures exceeding 125°F (52°C).
- Ceiling framing spacing should not exceed 16" (400 mm) o.c. for parallel or 24" (610 mm) o.c. for perpendicular application of 5/8" SilentFX QuickCut Type X Gypsum Board.
- Wall framing spacing should not exceed 24" (610 mm) o.c.
- Store indoors and off ground surface. Boards should be stacked flat with care taken to prevent sagging or damage to edges, ends and surfaces.
- Storing board lengthwise leaning against the framing is not recommended.
- Boards should be carried, not dragged, to place of installation to prevent damaging finished edges.
- SilentFX QuickCut boards are cut by scoring from the face side and snapping.
- In cold weather or during joint finishing applications, temperatures within the enclosure should stay in the range of 50° to 95°F (10° to 35°C) with sufficient ventilation to carry off excess moisture.

Continued on back

Job Name

Contractor

Date

Products Specified:

Submittal Approvals
(Stamps or Signatures)



Product Data

Thicknesses:

Nominal 1/2" (12.7 mm)
5/8" (15.9 mm) Type X

Weights:

1/2" (12.7 mm) 2.1 psf (10.3kg/m²)
5/8" (15.9 mm) 2.8 psf (13.7 kg/m²)

Widths: 4' (1220 mm)

Lengths: 8' (2440 mm) - 12' (3660 mm)
Custom lengths available upon request.
Contact the nearest Sales Office for stocked lengths available.

Edges: Tapered

Packaging: Two pieces per bundle, face-to-face and end taped.

Technical Data

Surface Burning Characteristics

SilentFX QuickCut Gypsum Boards have a Flame Spread rating of 0 and Smoke Developed rating of 0 when tested in accordance with ASTM E84, (UL 723, NFPA 255, and 0 / 5 ratings per CAN/ULC-S102).

Fire Resistance


5/8" SilentFX QuickCut Type X Gypsum Board is UL/cUL Classified for Fire Resistance in accordance with ASTM E119 (UL 263, NFPA 251, CAN/ULC-S101) and may be substituted for CertainTeed Type X and M2Tech Type X Gypsum Board in multiple UL/cUL fire-rated designs.

Abuse Resistance

ASTM C1629	Test Method	Classification Level
Surface Abrasion	D4977	2
Soft Body Impact	E695	1

Acoustic Performance

SilentFX QuickCut 5/8" Type X

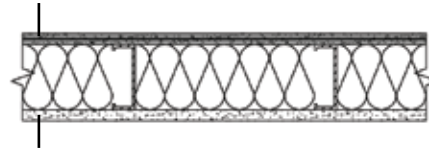

CertainTeed 5/8" Type X


Thickness: 4 7/8" (124 mm)

Fire Resistance Based Upon:

UL/cUL Design U465

Sound Test: STC 55

SilentFX QuickCut 5/8" Type X

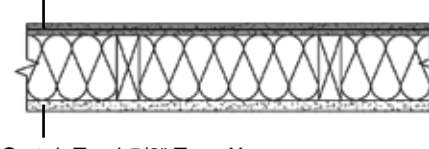

CertainTeed 5/8" Type X

Thickness: 5 1/4" (133 mm)

Fire Resistance Based Upon:

UL/cUL Design U309

Sound Test: STC 51

For more Acoustic and Fire Resistance Systems, refer to CertainTeed's Gypsum Board Systems Manual.

Other Applicable Standards and References

- ASTM C1766, C1396
- ASTM C1629
- ASTM D3273
- CAN/CSA-A82.27
- ASTM E90, E413
- CAN/CSA-A82.31
- ASTM C840
- Gypsum Association GA-216
- Gypsum Association GA-214
- ICC International Building Code (IBC)
- ICC International Residential Code (IRC)
- National Building Code of Canada (NBCC)

Installation

Decoration


SilentFX QuickCut Gypsum Board may be finished, painted, or wallpapered using conventional gypsum board techniques. The Gypsum Association publication, GA-214, "Recommended Levels of Gypsum Board Finish" should be referenced when specifying the level of finishing required for the desired final decoration.

* The performance of SilentFX QuickCut Gypsum Boards in actual use may not accurately reproduce the results achieved in this ASTM laboratory test. Good design and construction practices that prevent water and moisture exposure of building products are the most effective strategy to avoid the growth of mold.

Notice

The information in this document is subject to change without notice. CertainTeed assumes no responsibility for any errors that may inadvertently appear in this document.

The Health Product Declaration™ and logo is owned by the Health Product Declaration Collaborative™ and is used with permission.



ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE
GYPSUM • CEILINGS • INSULATION

www.certainteed.com <http://blog.certainteed.com>

CertainTeed Corporation
20 Moores Road
Malvern, PA 19355

Professional: 800-233-8990
Consumer: 800-782-8777