

Anchor Sheet or Base Ply


Mechanically attach or fully adhere (self-adhered, torch, or hot asphalt). Proper attachment of the base layer is defined by specified system, product selection and deck type.

Flashing Strips

Apply with hot asphalt and ensure 1/4" bleed out.

Edge Metal

Mechanically attach a minimum two staggered rows, 6" o.c. or as required by building code; endlaps should receive two nails. Edge Metal shall have a minimum 3/4" rise for gravel surfaced membranes and a 3/8" rise for smooth or mineral surfaced membranes.

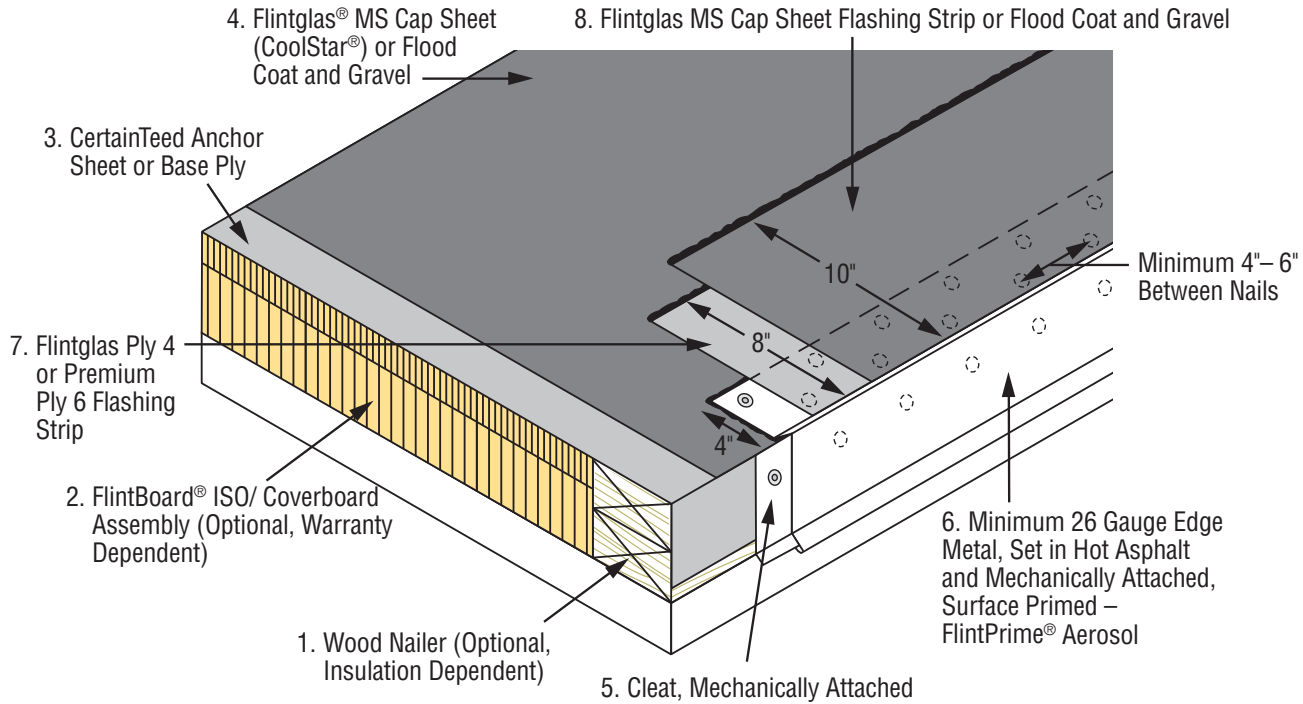

NOT DRAWN TO SCALE