

Anchor Sheet or Base Ply

Mechanically attach or fully adhere (self-adhered, torch, cold process or hot asphalt). Proper attachment is defined by specified system, product selection and deck type.

If applying by cold process or hot asphalt extend compound onto drain flange; **If the base layer is mechanically attached in the field**, base layer must be fully adhered beginning 9" from the drain flange edge.

Flashing Collar


Fully adhere (self-adhered, torch, cold process or hot asphalt) a minimum 38" x 38" flashing collar. Proper attachment is defined by product selection.

Lead or Copper Flashing

Flashing should be a minimum 30" x 30", 2.5 lb. lead or 16 oz. soft copper, turned down into the drain bow.

Cap Sheet

Fully adhere in accordance with the approved, published product application method.

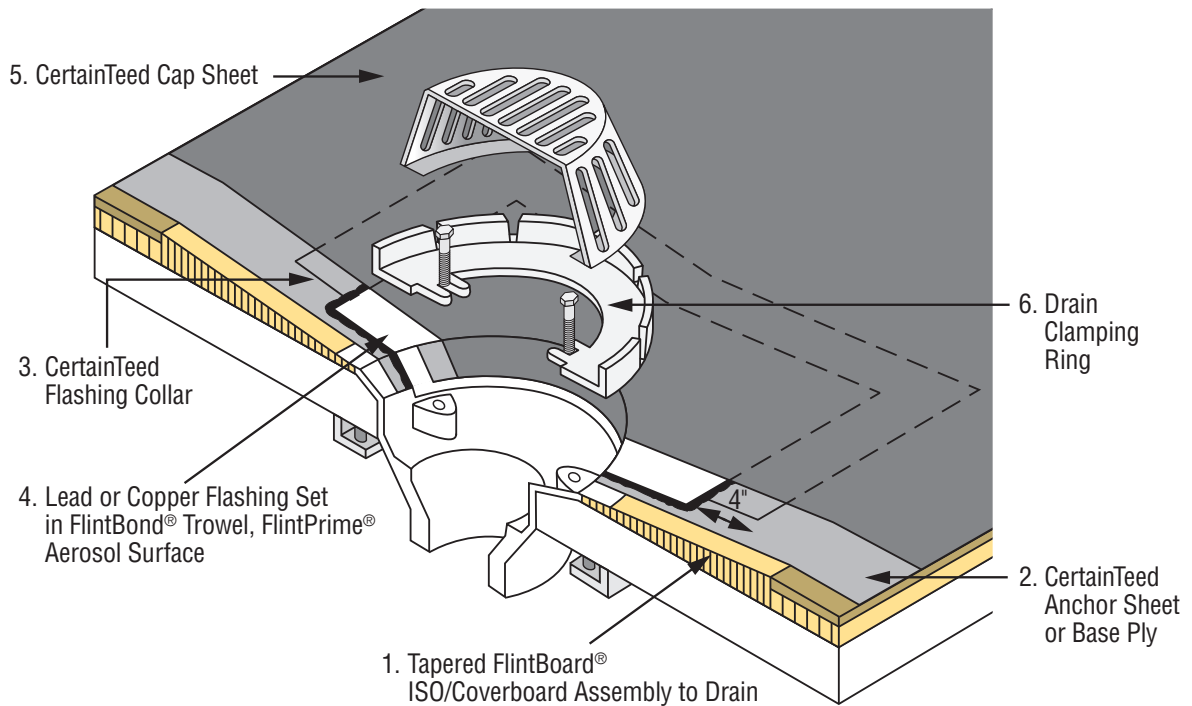

NOT DRAWN TO SCALE

Three-Ply Application

Replace the Flashing Collar with a CertainTeed Modified Bitumen Interply, extending the full dimension of the field.