


This detail depicts the weatherproofing protection and does not represent lightning protection design.

Extend Flashing Collar a minimum 6" beyond edge of Terminal. Treat the granulated surface of Cap Sheet, Field, where the Cap Sheet Flashing Collar overlap occurs: **If self-adhered or using cold-adhesive** apply FlintBond®

Trowel to entire lapped surface with 1/4" bleed out or (in cold weather¹) hot air weld² with bead of FlintBond Caulk at edge; **If torch-welded** heat sink/scrape the granules with heated trowel or granular embedment tool and ensure 1/4" bleed out; **if using hot asphalt** apply to entire lapped surface with 1/4" bleed out.

Terminal Support at Coping

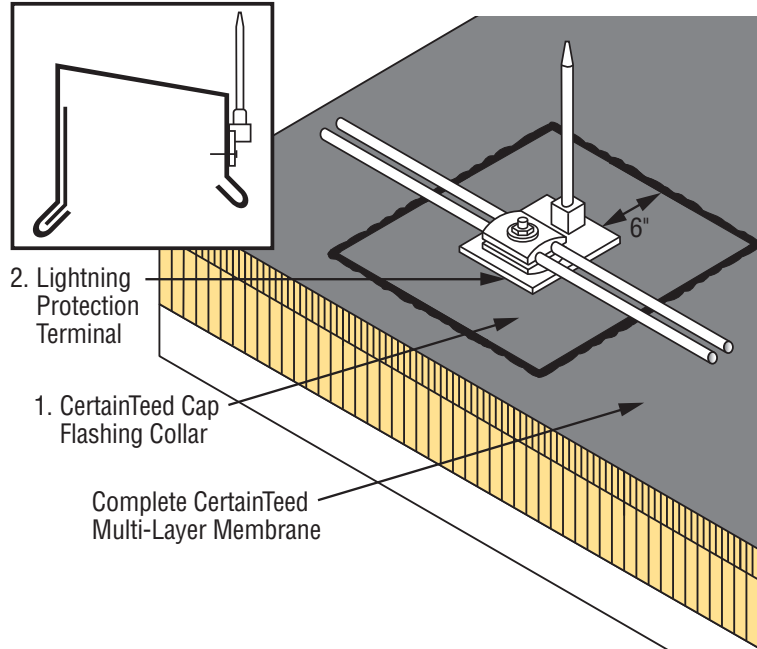

NOT DRAWN TO SCALE

¹20°F-49°F (-6.6°C-4.4°C)

²Apply heat from a hot-air welder with a 2" tip to the overlapped granular surface while applying rolling pressure from a silicone roller to the overlapping Cap. With the hot air welder set between 900°F-1,100°F (setting 8-10), apply heat to the overlap interface while bonding Cap with rolling pressure on the granulated surface. Roll the overlapping Cap in place, moving the hot air welder to allow for forward.