



Smooth fabric surface envelopes fiberglass panel and offers outstanding sound performance.

FEATURES AND BENEFITS

- Smooth, Texona fabric surface texture
- Use as a complement and/or alternative to accoustical ceiling panels for excellent performance within a space
- Attractive non-directional fissured pattern to aid in quick installation
- Available in 18 colors
- Moisture resistant

ALL PRODUCTS IN THIS LINE FEATURE THESE ATTRIBUTES

 EPD <small>AVAILABLE</small>	 RECYCLED <small>CONTENT</small>	 BIOSHIELD® <small>MOLD/MILDEW RESISTANT</small>	 LR <small>0.05-0.81</small>
--	--	--	--

CERTIFICATIONS & PRODUCT DECLARATIONS



EPD AVAILABLE


LEED® v4

RECYCLED CONTENT	71%
✓ MR: PBT Source Reduction (Healthcare)	
✓ EQ: Acoustic Performance	
✓ EQ: Prereq. Min. Acoustic Performance (Schools)	
✓ MR: Sourcing Raw Materials	
✓ MR: Environmental Product Declarations (EPDs)	
✓ MR: Construction and Demolition Waste Management Planning	

LEED® is a registered trademark of the U.S. Green Building Council.

ECOPHON® AKUSTO™ WALL C TEXONA

COLORS

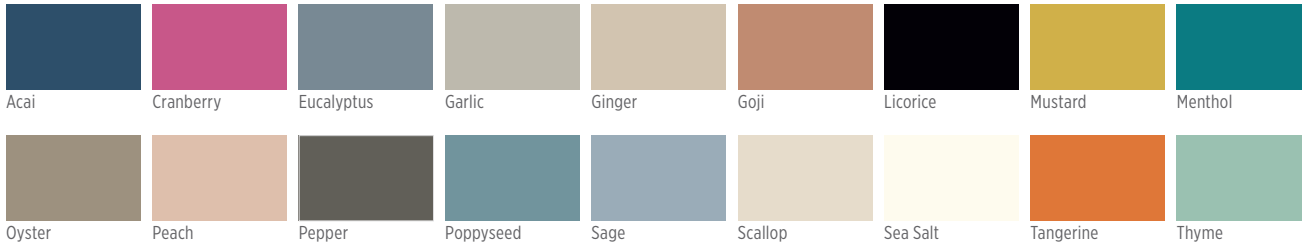


AKUSTO WALL C TEXONA PANELS		COLOR	DIMENSIONS MM(IN.)	NRC	LR	RECYCLED CONTENT	PIECES/ CARTON	SQ. FT./ CARTON	LBS./ CARTON	
WALL PANEL										
	NRC 95	3557 1002	Garlic	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.52	71%	4	21.3 (= 70)	71
		3557 1004	Pepper	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.17	71%	4	21.3 (= 70)	71
		3557 1005	Licorice	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.05	71%	4	21.3 (= 70)	71
		3557 1011	Ginger	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.56	71%	4	21.3 (= 70)	71
		3557 1012	Tangerine	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.27	71%	4	21.3 (= 70)	71
		3557 1050	Menthol	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.18	71%	4	21.3 (= 70)	71
		3557 1051	Mustard	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.45	71%	4	21.3 (= 70)	71
		3557 1056	Oyster	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.32	71%	4	21.3 (= 70)	71
		3557 1060	Sea Salt	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.81	71%	4	21.3 (= 70)	71
		3557 1063	Cranberry	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.15	71%	4	21.3 (= 70)	71
		3557 1064	Acai	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.11	71%	4	21.3 (= 70)	71
		3557 1065	Thyme	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.47	71%	4	21.3 (= 70)	71
		3557 1066	Poppyseed	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.28	71%	4	21.3 (= 70)	71
		3557 1081	Goji	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.27	71%	4	21.3 (= 70)	71
		3557 1082	Peach	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.55	71%	4	21.3 (= 70)	71
		3557 1083	Sage	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.40	71%	4	21.3 (= 70)	71
3557 1080	Eucalyptus	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.23	71%	4	21.3 (= 70)	71		
3557 1084	Scallop	2700 x 600 x 40 (= 106 x 24 x 1-1/2)	0.95	0.76	71%	4	21.3 (= 70)	71		

ECOPHON® AKUSTO™ WALL C TEXONA

ACCESSORIES

AKUSTO WALL C TEXONA ACCESSORIES	PRODUCT NAME	PIECES/ CARTON	USE
	2630 0214	260	For direct fixing of Connect WP Profile to structure
	2631 1050	10	For use in conjunction with WP Profile when Akusto Wall C panels are installed vertically
	2631 1051	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted
	2631 1052	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted
	2631 1074	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted
	2631 1057	4	Used in conjunction with WP Profile to create 90 degree outside corners
	2631 1058	4	Used in conjunction with WP Profile to create 90 degree outside corners
	2631 1059	4	Used in conjunction with WP Profile to create 90 degree outside corners
	2630 0933	4	For use when running multiple lengths of WP Profile end-to-end
	2630 0219	100	For use in the kerf between Akusto Wall C panels when they are installed vertically
	2630 0132	100	For direct fixing of Akusto Wall C panels when they are installed horizontally
	2630 0976 2630 0970 2630 0971	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted
	2630 0977 2630 0965 2630 0966	4	Used in conjunction with Thinline Profile to create 90 degree outside corners
	2631 2632	50	Galvanized steel. For fixing industry Ambit and support for Akusto Wall C in Thinline installation
	2630 0932	4	For use when running multiple lengths of Thinline profile end-to-end.

EDGE DETAILS



Kerfed Edge

*Connect Edge Sealant is available in all standard colors. Please contact your local Sales Representative or call 800-233-8990.

PHYSICAL DATA

MATERIAL

Fiberglass

FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

MOLD/MILDEW RESISTANCE

Fiberglass substrate is inherently resistant to the growth of mold and mildew.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY

10-year Ecophon Warranty.

Full warranty information can

be found at certainteed.com/ceilings.



CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
20 Moores Road, Malvern, PA 19355 800-366-4327 CertainTeed.com/Architectural