

ECOPHON® AKUSTO™ WALL C TEXONA


Wall Panels
Fiberglass

Smooth fabric surface envelopes fiberglass panel and offers outstanding sound performance.



APPLICATIONS


- Open Plan Offices
- Classrooms
- Libraries
- Conference Rooms
- Other Commercial Buildings / Space Applications

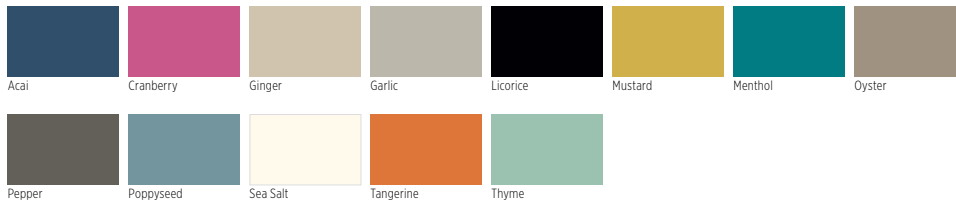

FEATURES AND BENEFITS

- Smooth, Texona fabric surface texture
- Use as a complement and/or alternative to acoustical ceiling panels for excellent performance within a space
- Available in 13 colors
- Moisture resistant

EDGE DETAILS



Kerfed Edge

LEED® v4

RECYCLED CONTENT	71%
<input type="checkbox"/>	EA: Optimize Energy Performance
<input type="checkbox"/>	EA: Prereq. Min. Energy Performance
<input type="checkbox"/>	EQ: Interior Lighting
<input checked="" type="checkbox"/>	MR: PBT Source Reduction (Healthcare)
<input checked="" type="checkbox"/>	EQ: Acoustic Performance
<input checked="" type="checkbox"/>	EQ: Prereq. Min. Acoustic Performance (Schools)
<input type="checkbox"/>	EQ: Daylight
<input type="checkbox"/>	MR: Material Ingredients (HPDs)
<input checked="" type="checkbox"/>	MR: Sourcing Raw Materials
<input checked="" type="checkbox"/>	MR: Environmental Product Declarations (EPDs)
<input checked="" type="checkbox"/>	MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

EPD®

EPD Available


ECOPHON® AKUSTO™ WALL C TEXONA

Wall Panels
Fiberglass








All products in this line
feature these attributes:



AKUSTO WALL C TEXONA PANELS

WALL PANEL	Color	Dimensions mm (in.)	NRC	LR	Recycled Content	Pieces/ carton	Sq. m (Ft.)/ carton	Lbs./ carton
 NRC 95	3557 1002	Garlic 2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.52	71%	4	21.3 (≈ 70)	71
	3557 1004	Pepper 2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.17	71%	4	21.3 (≈ 70)	71
	3557 1005	Licorice 2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.05	71%	4	21.3 (≈ 70)	71
	3557 1011	Ginger 2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.56	71%	4	21.3 (≈ 70)	71
	3557 1012	Tangerine 2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.27	71%	4	21.3 (≈ 70)	71
	3557 1050	Menthol 2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.18	71%	4	21.3 (≈ 70)	71
	3557 1051	Mustard 2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.45	71%	4	21.3 (≈ 70)	71
	3557 1056	Oyster 2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.32	71%	4	21.3 (≈ 70)	71
	3557 1060	Sea Salt 2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.81	71%	4	21.3 (≈ 70)	71
	3557 1063	Cranberry 2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.15	71%	4	21.3 (≈ 70)	71
	3557 1064	Acai 2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.11	71%	4	21.3 (≈ 70)	71
	3557 1065	Thyme 2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.47	71%	4	21.3 (≈ 70)	71
	3557 1066	Poppyseed 2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.28	71%	4	21.3 (≈ 70)	71

ACCESSORIES

AKUSTO WALL C TEXONA ACCESSORIES	Product Name	Pieces/carton	Use
	2630 0214 Connect Fixing Bracket	260	For direct fixing of Connect WP Profile to structure
	2631 1050 Connect WP Space Bar (Galvanized)	10	For use in conjunction with WP Profile when Akusto Wall C panels are installed vertically
	2631 1051 Connect WP Profile Connect (White 03)	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted
	2631 1052 Connect WP Profile (Natural 02)	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted
	2631 1074 Connect WP Profile (Black 01)	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted
	2631 1057 Connect WP External Corner (White 03)	4	Used in conjunction with WP Profile to create 90 degree outside corners
	2631 1058 Connect WP External Corner (Grey 02)	4	Used in conjunction with WP Profile to create 90 degree outside corners

ECOPHON® AKUSTO™ WALL C TEXONA

Wall Panels
Fiberglass

ACCESSORIES

AKUSTO™ WALL C TEXONA ACCESSORIES (continued)		Product Name	Pieces/carton	Use
	26311059	Connect WP External Corner (Black 01)	4	Used in conjunction with WP Profile to create 90 degree outside corners
	2630 0933	WP Profile Splice	4	For use when running multiple lengths of WP Profile end-to-end
	2630 0219	Connect Spline (Black)	100	For use in the kerf between Akusto Wall C panels when they are installed vertically
	2630 0132	Connect Direct Fixing Plate (Akusto Wall C)	100	For direct fixing of Akusto Wall C panels when they are installed horizontally
	2630 0976 2630 0970 2630 0971	Connect Thinline Profile	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted
	2630 0977 2630 0965 2630 0966	Connect Thinline Corner	4	Used in conjunction with Thinline Profile to create 90 degree outside corners
	2631 2632	Connect Ambit Fixing	50	Galvanized steel. For fixing industry Ambit and support for Akusto Wall C in Thinline installation
	2630 0932	Connect Thinline Splice	4	For use when running multiple lengths of Thinline profile end-to-end.

PHYSICAL DATA

MATERIAL
Fiberglass

FIRE CLASS (ASTM E1264)
Tested according to ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

MOLD/MILDEW RESISTANCE
Fiberglass substrate is inherently resistant to the growth of mold and mildew.

MAINTENANCE
Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY
10-year Ecophon Warranty.
Full warranty information can be found at certainteed.com/ceilings.



CertainTeed

CEILINGS • DECKING • FENCE • GYPSUM • INSULATION • RAILING • ROOFING • SIDING • TRIM
20 Moores Road Malvern, PA 19355 Professional: 800-233-8990 Consumer: 800-782-8777 certainteed.com

ECOPHON® AKUSTO™ WALL C TEXONA

Wall Panels
Fiberglass

