


Fissured
Mineral Fiber

A non-directional mineral fiber panel for all-around workability, affordability and great-looking installations.



APPLICATIONS


- Schools / Classrooms
- Libraries / Media Centers
- Retail / Department Stores
- Offices
- Open Plan Areas
- Healthcare Spaces – High NRC
- Computer Rooms – High NRC
- Other Commercial Buildings / Space Applications




FEATURES AND BENEFITS

- Non-directional fissured pattern
- Cuts cleanly, leading to quicker installation and lower installation costs
- High NRC panels are excellent for budgeted projects requiring high sound absorption
- High NRC panels comply with LEED v4 for School classroom acoustics prerequisite
- Customline options provide three dramatic geometric designs with discreet small-scale fissure pattern
- Deep face-scoring assists in masking the presence of metal grid on Customline products
- High humidity and sag resistant
- Some products available in fire-rated (Protectone) versions
- Environmental Product Declaration (EPD) available for this product
- Health Product Declaration (HPD) available for this product
- Available in 6 standard colors for item numbers HHF-154, HHF-157, HHF-197, FFCL-224
- High NRC has USDA Certified Biobased content of 98%

SUSPENSION SYSTEM OPTIONS

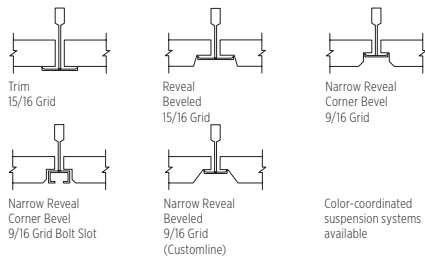

CUSTOMLINE SCORING OPTIONS



LEED® v4	
RECYCLED CONTENT	
CLASS A PROTECTONE®	33 - 70% 44%
<input type="checkbox"/>	EA: Optimize Energy Performance
<input type="checkbox"/>	EA: Prereq. Min. Energy Performance
<input type="checkbox"/>	EQ: Interior Lighting
<input checked="" type="checkbox"/>	MR: PBT Source Reduction (Healthcare)
<input checked="" type="checkbox"/>	EQ: Acoustic Performance
<input checked="" type="checkbox"/>	EQ: Prereq. Min. Acoustic Performance (Schools) <i>Applies only to High NRC</i>
<input checked="" type="checkbox"/>	EQ: Low-Emitting Materials
<input checked="" type="checkbox"/>	EQ: Daylight
<input checked="" type="checkbox"/>	MR: Material Ingredients (HPDs)
<input checked="" type="checkbox"/>	MR: Sourcing Raw Materials
<input checked="" type="checkbox"/>	MR: Environmental Product Declarations (EPDs)
<input checked="" type="checkbox"/>	MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.



FINE FISSURED | FINE FISSURED HIGH NRC | FINE FISSURED CUSTOMLINE®

Fissured
Mineral Fiber

All products in this line
feature these attributes:



FINE FISSURED HIGH NRC

	Format	Dimensions (in.)	NRC	CAC	Recycled Content	UL Fire-Rated	LR	Pieces/carton	Sq. Ft./carton	Lbs./carton	Cartons/pallet		
TRIM													
	NRC70	HHF-457 HNRCX	Panels	24 x 24 x 3/4	0.75	35	70%	—	0.83	14	56	55	16
		HHF-497 HNRCX	Panels	24 x 48 x 3/4	0.75	35	70%	—	0.83	8	64	62	16
REVEAL													
	NRC70	HHF-454 HNRCX	Panels	24 x 24 x 3/4	0.75	35	70%	—	0.83	14	56	55	16
		HHF-494 HNRCX	Panels	24 x 48 x 3/4	0.75	35	70%	—	0.83	8	64	62	16
NARROW REVEAL													
	NRC55	HHF-450 HNRCX	Panels	24 x 24 x 3/4	0.75	35	70%	—	0.83	14	56	55	16
		HHF-490 HNRCX	Panels	24 x 48 x 3/4	0.75	35	70%	—	0.83	8	64	62	16

FINE FISSURED

	Format	Dimensions (in.)	NRC (UL Classified)	CAC (UL Classified)	Recycled Content	UL Fire-Rated	LR	Pieces/carton	Sq. Ft./carton	Lbs./carton	Cartons/pallet		
TRIM													
	NRC55	HHF-157	Panels	24 x 24 x 5/8	0.55	33	33%	—	0.84	16	64	50	20
		PFF-157	Panels	24 x 24 x 5/8	0.55	35	44%	Yes*	0.84	16	64	70	20
		HHF-197	Panels	24 x 48 x 5/8	0.55	35	33%	—	0.84	8	64	45	20
		PFF-197	Panels	24 x 48 x 5/8	0.55	40	44%	Yes*	0.84	8	64	70	20
		HHF-177	Panels	24 x 60 x 5/8	0.55	35	33%	—	0.84	8	80	51	20
		HHF-2067	Panels	20 x 60 x 5/8	0.55	35	33%	—	0.84	8	66.7	52	16
REVEAL													
	NRC55	HHF-154	Panels	24 x 24 x 5/8	0.55	33	33%	—	0.84	16	64	45	20
		PFF-154	Panels	24 x 24 x 5/8	0.55	35	44%	Yes*	0.84	16	64	70	20
		HHF-194	Panels	24 x 48 x 5/8	0.55	35	33%	—	0.84	8	64	45	20
NARROW REVEAL													
	NRC55	HHF-150	Panels	24 x 24 x 5/8	0.55	35	33%	—	0.84	16	64	45	20

FINE FISSURED METRIC

	Format	Dimensions (mm)	NRC (UL Classified)	CAC (UL Classified)	Recycled Content	UL Fire-Rated	LR	Pieces/carton	Sq. m/carton	Lbs./carton	Cartons/pallet		
METRIC TRIM													
	NRC55x	HHF-2067M	Panels	500 x 1500 x 15	0.55	35	33%	—	0.84	8	6	52	20



* Protectone*: A fire-resistive ceiling when used in applicable UL assemblies. Protectone product is indicated by a Yes in the UL Fire-Rated column. To specify color other than white, order by item number followed by color code. Example: HHF-154 BEB. Color List: Beige Breeze – BEB, Blondewood – BLW, Silver Lining – SIL, Wet Clay – WEC, White Wash – WIW. Only available for HHF-154, HHF-157, HHF-197, and FFCL-224 products.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

Fissured
Mineral Fiber

All products in this line feature these attributes:



FINE FISSURED CUSTOMLINE		Format	Dimensions (in.)	NRC (UL Classified)	CAC (UL Classified)	Recycled Content	UL Fire-Rated	LR	Pieces/ carton	Sq. Ft./ carton	Lbs./ carton	Cartons/ pallet	
REVEAL													
	NRC 55	FFCL-224	Panels	24 x 48 x 3/4	0.55	38	33%	-	0.84	8	64	64	16
	NRC 50	FFCL-448	Panels	24 x 48 x 3/4	0.50	38	33%	-	0.84	8	64	60	16
		FFCL-812	Panels	24 x 48 x 3/4	0.50	38	33%	-	0.84	8	64	64	16
		PFCL-224	Panels	24 x 48 x 3/4	0.50	40	44%	Yes*	0.84	8	64	75	16
NARROW REVEAL													
	NRC 55	FFCLN-224	Panels	24 x 48 x 3/4	0.55	38	33%	-	0.84	8	64	64	16
	NRC 50	FFCLN-448	Panels	24 x 48 x 3/4	0.50	38	33%	-	0.84	8	64	60	16
		FFCLN-812	Panels	24 x 48 x 3/4	0.50	38	33%	-	0.84	8	64	64	16

* Protectone*: A fire-resistive ceiling when used in applicable UL assemblies. Protectone product is indicated by a Yes in the UL Fire-Rated column.
To specify color other than white, order by item number followed by color code. Example: HHF-154 BEB. Color List: Beige Breeze – BEB, Blondewood – BLW, Silver Lining – SIL, Wet Clay – WEC, White Wash – WIW.
Only available for HHF-154, HHF-157, HHF-197, and FFCL-224 products.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL
Mineral Fiber

ASTM D1264 CLASSIFICATION
Type III, Form 2, Pattern C D
(Standard & High NRC)
Type III, Form 2, Pattern C D K (Customline)

FIRE CLASS (ASTM E1264)
All are Class A per ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

VOC EMISSIONS
Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

MOLD/MILDEW RESISTANCE
BioShield treatment included for added mold and mildew resistance.

INSTALLATION CONSIDERATION
Differing manufacturing dates should not be mixed in a single ceiling.

MAINTENANCE
Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY
10-year 104/95 Limited Warranty increases to 15 years when installed with CertainTeed suspension systems. Full warranty information can be found at certainteed.com/ceilings.



CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
20 Moores Road, Malvern, PA 19355 800-387-3809 CertainTeed.com/Architectural