


Technical Data Sheet

LANDMARK™ Premium Shingles
 LANDMARK Pro/Architect™ 80 Shingles (NW Region only)
 LANDMARK™ Pro Shingles
 LANDMARK™ Shingles

PRODUCT INFORMATION

Landmark™ shingles reflect the same high manufacturing standards and superior warranty protection as the rest of CertainTeed's line of roofing products. Landmark Premium (and Algae Resistant-AR), Landmark Pro (and AR) and Landmark (and AR) are built with the industry's toughest fiber glass mat base, and their strict dimensional tolerance assures consistency. Complex granule color blends and subtle shadow lines produce a distinctive color selection. Landmark is produced with the unique NailTrak™ nailing feature. **Please see the installation instruction section below for important information regarding NailTrak™.**

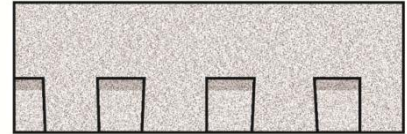

In the Northwest (NW) Region Landmark Pro (AR) is double-branded as Landmark Pro/Architect 80 (AR).

Landmark algae-resistant (AR) shingles have the additional attribute of resisting the growth of algae especially in damp regions. AR shingles are not available in all regions

Colors: Please refer to the product brochure or CertainTeed website for the colors available in your region.

Limitations: Use on roofs with slopes greater than 2" per foot. Low-slope applications (2" to 4" per foot) require additional underlayment. In areas where icing along eaves can cause the back-up of water, apply CertainTeed WinterGuard™ Waterproofing Shingle Underlayment, or its equivalent, according to application instructions provided with the product and on the shingle package.

Product Composition: Landmark series shingles are composed of a fiber glass mat base. Ceramic-coated mineral granules are tightly embedded in carefully refined, water-resistant asphalt. Two pieces of the shingle are firmly laminated together in a special, tough asphaltic cement. All Landmark shingles have self-sealing adhesive strips.

Applicable Standards

ASTM D3018 Type I	ICC Evaluation Report ESR-1389
ASTM D3462	ICC Evaluation Report ESR-3537
ASTM E108 Class A Fire Resistance	CSA Standard A123.5 (Regional)
ASTM D3161 Class F Wind Resistance	Miami-Dade Product Control Approved (Regional)
ASTM D7158 Class H Wind Resistance	Florida Product Approval # FL5444 (Regional)
UL 790 Class A Fire Resistance	TDI Windstorm Resistance (Regional)

Technical Data:

	Landmark (and AR)	Landmark Pro* (and AR)	Landmark Premium (and AR)
Weight/Square (approx.)	229 / 240 lb**	250 / 270 lb**	300 lb
Dimensions (overall)	13 1/4" x 38 3/4"	13 1/4" x 38 3/4"	13 1/4" x 38 3/4"
Shingles/Square (approx.)	65	66	66
Weather Exposure	5 5/8"	5 5/8"	5 5/8"

*Includes "Landmark Pro AR/Architect 80"

**Dependent on manufacturing location

INSTALLATION

The following is a general summary of the installation methods. Detailed installation instructions are supplied on each bundle of Landmark shingles and must be followed. Separate application sheets may also be obtained from CertainTeed.

Roof Deck Requirements: Apply shingles to minimum 3/8" thick plywood, minimum 7/16" thick non-veneer (e.g. OSB), or minimum 1" thick (nominal) wood decks. The plywood or non-veneer decks must comply with the specifications of APA-The Engineered Wood Association.

Ventilation: Provisions for ventilation should meet or exceed current HUD Standards. To ensure adequate balance ventilation, use a combination of continuous ridge ventilation (using CertainTeed Ridge Vent products, or a comparable product with an external baffle) combined with soffit venting.

Valleys: Valley liner must be applied before shingles. The Closed-Cut valley application method is recommended, using CertainTeed WinterGuard Waterproofing Shingle Underlayment or its equivalent to line the valley prior to being fully covered by the shingles.

Underlayment:

On slopes 4" per foot or greater, CertainTeed recommends one layer of DiamondDeck™ Synthetic Underlayment, or Roofers' Select™ High-Performance shingle underlayment, or shingle underlayment meeting ASTM D226, D4869 or ASTM D6757. Always ensure sufficient deck ventilation, and take particular care when DiamondDeck or other synthetic underlayment is installed. For UL fire rating, underlayment may be required. Corrosion-resistant drip edge is recommended and should be placed over the underlayment at the rake and beneath the underlayment at the eaves. Follow manufacturer's application instructions.

On low slopes (2" up to 4" per foot), one layer of CertainTeed's WinterGuard Waterproofing Shingle Underlayment (or equivalent meeting ASTM D1970) or two layers of 36" wide felt shingle underlayment (Roofers' Select High-Performance Underlayment or product meeting ASTM D226, D4869 or ASTM D6757) lapped 19" must be applied over the entire roof, ensure sufficient deck ventilation. When DiamondDeck or other synthetic underlayment is installed, weather-lap at least 20" and ensure sufficient deck ventilation. When WinterGuard is applied to the rake area, the drip edge may be installed under or over WinterGuard. At the eave, when WinterGuard does not overlap the gutter or fascia, the drip edge should be installed under WinterGuard. When WinterGuard overlaps the fascia or gutter, the drip edge or other metal must be installed over it. Follow manufacturer's application instructions.

Fastening (NailTrak™):

Low & Standard Slopes: On low and standard slopes, four nails are required per shingle. There are three nail lines on NailTrak shingles. Position nails vertically between the upper and lower nailing-guide lines. It is acceptable to nail between either the middle and lower lines, or between the upper and middle lines. Nails must be of sufficient length to penetrate into the deck 3/4" or through the thickness of the decking, whichever is less. They are to be located 1" and 12" in from each side of the shingle (see instructions on product wraps.) Nails are to be 11 or 12 gauge, corrosion-resistant roofing nails with 3/8" heads.

Steep Slopes: On slopes greater than 21" per foot, fasten each shingle with six nails and four spots of roofing cement placed under each shingle according to application instructions provided on the shingle package. Fasteners must penetrate the two-layer common bond area that is indicated by the middle and lower NailTrak lines, also illustrated on the shingle package.

Application: The recommended application method is the 'Five-Course, Diagonal Method' found on each bundle of shingles. In this method, shingle course offsets are 6" and 11". Instructions also may be obtained from CertainTeed. These shingles may be used for new construction or for reroofing over existing Metric-sized shingles.

Flashing: Use corrosion-resistant metal flashing.

Hips and Ridges: For capping hip and ridge apply CertainTeed Shadow Ridge™, Cedar Crest™ or Mountain Ridge™ shingles of a like color.

MAINTENANCE

These shingles do not require maintenance when installed according to manufacturer's application instructions. However, to protect the investment, any roof should be routinely inspected at least once a year. Older roofs should be looked at more frequently.

WARRANTY

Landmark Premium (and AR), Landmark Pro/Architect 80 AR, Landmark Pro (and AR), and Landmark (and AR) shingles carry a lifetime limited, transferable warranty to the consumer against manufacturing defects. In addition, Landmark Premium (and AR), Landmark Premium/Architect 80, Landmark Pro (and AR), and Landmark (and AR) carry 10-years of SureStart™ Protection. For specific warranty details and limitations, refer to the warranty itself (available from the local supplier, roofing contractor or on-line at www.certainteed.com).

FOR MORE INFORMATION

Sales Support Group: 800-233-8990

Web site: www.certainteed.com

See us at our on-line specification writing tool, CertaSpec, at www.certainteed.com/certaspec.

CertainTeed Roofing

20 Moores Road
Malvern, PA 19355

© Copyright CertainTeed Corporation, 2016
All rights reserved. Updated: 02/2016

