


# Technical Data Sheet

## Presidential Solaris® Shingles



### PRODUCT INFORMATION

Presidential Solaris innovative technology produces a shingle that reflects solar energy in a traditional color palette. All colors are rated by Cool Roof Rating Council (CRRC) and meet California's Title 24 requirements for cool steep slope roofing. Presidential Solaris Gold Max Def Weathered Wood complies with ENERGY STAR® requirements. These shingles are manufactured using the same high standards as all CertainTeed roofing products and are covered by the same superior warranty protection.

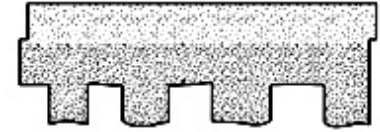

Presidential Solaris Gold Max Def Weathered Wood algae-resistant (AR) shingles help protect against staining, discoloration, or black streaking caused by blue-green algae.

Presidential Solaris shingles, with unique sculptured tabs, provide the distinct styling, depth and dimension of wood shakes. It is constructed using two laminated layers of the industry's strongest, most durable roofing materials and is designed to resist blow off in high wind conditions up to 110-mph with normal installation and 130-mph with special installation.

**Colors:** Please refer to the product brochure or CertainTeed website for the colors available in your region.

Color	Solar Radiative Properties							Meets California Title 24?	Energy Star Certified?
	CRRC Product ID	Solar Reflectance		Thermal Emittance		Solar Reflective Index			
		Initial	Aged	Initial	Aged	Initial	Aged		
Presidential Solaris Gold									
Max Def Weathered Wood	0668-0076	0.25	0.23	0.93	0.90	27	23	Yes	Yes
Presidential Solaris									
Autumn Blend	0668-0127	0.21	Pending	0.92	Pending	21	21*	Yes	No
Country Gray	0668-0128	0.21	Pending	0.92	Pending	21	21*	Yes	No

\*Aged SRI is calculated using the California Energy Commission's Solar Reflective Index (SRI) Calculation Worksheet

**Limitations:** Use on roofs with slopes greater than 2" per foot. Low-slope applications (2" to 4" per foot) require additional underlayment. In areas where icing along eaves can cause the back-up of water, apply CertainTeed WinterGuard® Waterproofing Shingle Underlayment, or its equivalent, according to application instructions provided with the product and on the shingle package.

On slopes greater than 21" per foot, use nine nails and apply spots of roofing cement under each shingle tab, according to application instructions provided with the product and the shingle package.

**Product Composition:** Presidential Solaris shingles are composed of a fiber glass mat base. Ceramic-coated mineral granules with high solar reflectance are tightly embedded in carefully refined, water-resistant asphalt. The laminated pieces are firmly adhered in special tough asphaltic cement. These fiber glass based shingles have self-sealing adhesive applied.

**Applicable Standards:**

ASTM D3018 Type 1	CSA Standard A123.5
ASTM D3462	ICC-ES ESR-1389 & ESR-3537
ASTM E108 Class A Fire Resistance	Miami-Dade Product Control Approved
ASTM D3161 Class F Wind Resistance	Florida Product Approval # FL5444
ASTM D7158 Class H Wind Resistance	TDI Windstorm Resistance
UL 790 Class A Fire Resistance	

**Technical Data:**

Weight/Square (approx.):	353
Dimensions (overall):	14 1/4" x 40"
Shingles/Square:	90
Weather Exposure:	4"

**INSTALLATION**

The following is a general summary of the installation methods. Detailed installation instructions are supplied on each bundle of Presidential Solaris shingles and must be followed. Separate application sheets may also be obtained from CertainTeed.

**IMPORTANT NOTE** - Presidential Starter or an approved alternative starter system must be used for the two-layered starter course.

**Roof Deck Requirements:** Apply shingles to minimum 3/8" thick plywood, minimum 7/16" thick non-veneer, or minimum 1" thick (nominal) wood decks. The plywood or non-veneer decks must comply with the specifications of APA – The Engineered Wood Association.

**Ventilation:** Provisions for ventilation should meet or exceed current HUD Standards. To ensure adequate balance ventilation, use a combination of continuous ridge ventilation (using CertainTeed Ridge Vent products, or a comparable product with an external baffle) combined with soffit venting.

**Valleys:** Open valley is recommended. Valley liner must be applied before shingles. It must be minimum 18" wide 16 oz. copper, or its equivalent, installed over 36" wide self-adhering CertainTeed WinterGuard Waterproofing Shingle Underlayment (apply directly to deck), or applied over 36" wide mineral surfaced roll roofing. After WinterGuard has been applied, install the 16-oz. copper centered in the valley. For application of copper valley, use copper cleats or large head copper nails. Closed-Cut valley application is an acceptable alternate, provided the shingles are not damaged while being formed into place. Refer to the application instructions on the shingle packaging for further information.

**Underlayment:**

On slopes 4" per foot or greater, CertainTeed recommends one layer of DiamondDeck® Synthetic Underlayment, or Roofers' Select® High-Performance shingle underlayment, or shingle underlayment meeting ASTM D226, D4869 or ASTM D6757. Always ensure sufficient deck ventilation, and take particular care when DiamondDeck or other synthetic underlayment is installed. For UL fire rating, underlayment may be required. Corrosion-resistant drip edge is recommended and should be placed over the underlayment at the rake and beneath the underlayment at the eaves. Follow manufacturer's application instructions.

**Underlayment continued:**

On low slopes (2" up to 4" per foot), one layer of CertainTeed's WinterGuard Waterproofing Shingle Underlayment (or equivalent meeting ASTM D1970) or two layers of 36" wide felt shingle underlayment (Roofers' Select High-Performance Underlayment or product meeting ASTM D226, D4869 or ASTM D6757) lapped 19" must be applied over the entire roof, ensure sufficient deck ventilation. When DiamondDeck or other synthetic underlayment is installed, weather-lap at least 20" and ensure sufficient deck ventilation. When WinterGuard is applied to the rake area, the drip edge may be installed under or over WinterGuard. At the eave, when WinterGuard does not overlap the gutter or fascia, the drip edge should be installed under WinterGuard. When WinterGuard overlaps the fascia or gutter, the drip edge or other metal must be installed over it. Follow manufacturer's application instructions.

### Fastening:

**Low and Standard Slopes:** For slopes of 21" per foot or less, five fasteners are required per shingle. Nails are to be located on the nailing guide line, 9" above the lowermost edge of the shingle, two located 1 to 1-1/2" in from each edge and the remaining three evenly spaced between (about 9" to 10" apart). Nails must be of sufficient length to penetrate into the deck 3/4" into or through the thickness of the decking, whichever is less. Nails are to be 11- or 12-gauge, corrosion-resistant roofing nails with 3/8" heads.

**Steep Slope:** For roof slopes greater than 21" per foot, nine fasteners are required per shingle. After applying 5 nails in nailing guideline, apply 4 nails 1" above tab cutouts, making certain tabs of overlying shingle covers nails. Also at slopes greater than 21" per foot, apply spots of roofing cement under each shingle tab, according to application instructions provided for the product and on the shingle package.

**Standard Application:** Presidential Starter or an approved alternative starter system must be used for the two-layered starter course. The required application method is the 5" & 15" Offset, Four-Course, Diagonal Method found on each bundle of shingles. These shingles may be used for new construction or for reroofing over one layer of old shingles, but due to the heavy weight of this shingle, it is important to determine that the roof deck system is satisfactory for the application of these shingles. Refer to product wrap for detailed reroofing limitations. All shingles on the finished roof must be applied with five fasteners. Always cut shingles from the left edge.

**Flashing:** Use corrosion-resistant metal flashing. Please refer to illustrations on our shingle packaging.

**Hips and Ridges:** Use Mountain Ridge® 10" AR Solaris shingles of a complementary color for capping the hips and ridges.

### MAINTENANCE

Presidential Solaris shingles require virtually no maintenance when installed according to manufacturer's application instructions. However, to protect the investment, any roof should be routinely inspected at least once a year. Older roofs should be looked at more frequently.

### WARRANTY

Presidential Solaris shingles carry a Lifetime Limited Warranty, 10-year SureStart protection, and a 10-year 110 mph wind-resistance warranty (upgradeable to 130 mph when using Presidential starter and a CertainTeed brand hip and ridge accessory shingle), and 15 year algae resistance warranty on Presidential Solaris Gold Max Def Weathered Wood. For specific warranty details and limitations, refer to the warranty itself (available from the local supplier, roofing contractor or on-line at [www.certainteed.com](http://www.certainteed.com)).

### FOR MORE INFORMATION

Sales Support Group: 800-233-8990

Web site: [www.certainteed.com](http://www.certainteed.com)

### CertainTeed Roofing

20 Moores Road  
Malvern, PA 19355

© Copyright CertainTeed Corporation, 2017  
All rights reserved. Updated: 02/2017

**CertainTeed**  
SAINT-GOBAIN