Technical Product Data


FLINTFAST®#12 FASTENERS

Product Information



Description: FlintFast Fasteners from CertainTeed are engineered to provide top quality performance with commercial roofing systems and designed to increase strength and improve application efficiency. Fasteners are used in roofing applications for the attachment of roofing insulation (FlintBoard®) and base sheets.

Uses: Exclusive tapered wedge entry and sharp drill point for fast, strong application in steel and wood substrates. FlintFast #12 Fasteners are not for use in concrete decks. Available in lengths from 1-5/8" to 8".

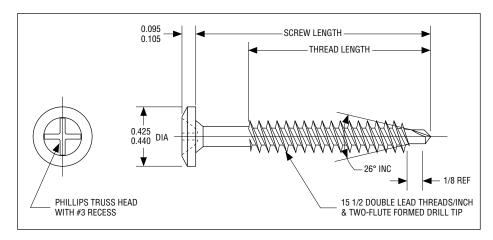

Technical Data

13 single lead threads per inch

Standard #3 Phillips Truss Head

Back-out resistance

Coating exceeds FM4470 corrosion standards

Approvals: Factory Mutual, Miami-Dade

Pull-out Values in Steel

18 Ga. - 558 lbs.

20 Ga. - 456 lbs.

22 Ga. - 452 lbs.

24 Ga. - 335 lbs.

Product Application

Eye protection must be worn. Install using 2500 RPM variable speed drill. Do not over or under drive.

Steel decks: penetrate 3/4" minimum Wood decks: penetrate 1" minimum



Packaging

Part No.	Screw Length*	Thread Length*	Pieces per Pail	Weight/Box
DP-1625	1-5/8	FULL	1000	12#
DP-2250	2-1/4	FULL	1000	16#
DP-2875	2-7/8	FULL	1000	19#
DP-3250	3-1/4	2-7/8	1000	22#
DP-3750	3-3/4	2-7/8	1000	25#
DP-4500	4-1/2	4	1000	30#
DP-5000	5	4	1000	32#
DP-6000	6	4	1000	38#
DP-7000	7	4	1000	42#
DP-8000	8	4	1000	48#

Driver included in each pail

For more information, contact CertainTeed Commercial Roofing Technical Services at $800-396-8134\ x2$.

ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE GYPSUM • CEILINGS • INSULATION

www.certainteed.com http://blog.certainteed.com

CertainTeed Corporation P.O. Box 860 Valley Forge, PA 19482

Professional: 800-233-8990 Consumer: 800-782-8777

© 03/15 CertainTeed Corporation, Printed in the U.S.A. Code No. COMM-172



^{*} Screw length = $\pm 1/16$ " Thread length = $\pm 1/16$ "