

## FLINTFAST® #15 HEAVY DUTY FASTENERS

### Product Information



**Description:** FlintFast Fasteners from CertainTeed are engineered to provide top quality performance with commercial roofing systems and designed to increase strength and improve application efficiency. Heavy Duty Fasteners are used in roofing applications for the attachment of roofing insulation (FlintBoard®) and base sheets.

**Uses:** For tougher jobs, the low-profile head provides positive driving, while sharp drill point and exclusive tapered wedge entry allow fast, strong application. Available in lengths from 1-1/4" to 24".

### Technical Data

13 single lead threads per inch  
 Typical pullout in 22 gauge steel deck: 680 lbs.  
 Typical pullout in structural concrete 1" embedment: 1,000 lbs.  
 Standard #3 Phillips truss head  
 Back-out resistance  
 EPX™ epoxy coating exceeds FM4470 corrosion standards  
 Approvals: Factory Mutual, Miami-Dade

### Product Application

Eye protection must be worn. Install using 2500 RPM variable speed drill.  
 Do not over or under drive.


Steel decks: penetrate 3/4" minimum  
 Wood decks: into or through deck 1" minimum  
 Concrete decks: penetrate 1" minimum

### Packaging

Size	Package	Quantity	Weight/M	Pails/Boxes per Pallet	Weight per Pallet
1-1/4*	BKT-2	1000	12.6	60	757.2
2*	BKT-2	1000	19.5	60	1170
3*	BKT-2	1000	28.2	60	1693.2
4	BKT-2	1000	37.8	60	2268
5	BKT-3	1000	48.1	60	2886
6	BKT-2	500	55.8	60	1673.7
7	BKT-2	500	67.2	60	2016
8	BKT-2	500	74.6	60	2238
9	BKT-10LW	250	82.7	60	1240.5
10	BKT-10LW	250	92.1	60	1381.8
11	BKT-10LW	250	101.0	60	1515
12	BKT-10LW	250	115.5	60	1732.5
14	Box-18T/Box-18TI	250	133.0	30	997.5
16	Box-18T/Box-18TI	250	147.4	30	1105.5
18	Box-18T/Box-18TI	250	166.6	30	1249.5
20	Box-24T/Box-24TI	250	186.8	30	1401
22	Box-24T/Box-24TI	250	204.4	30	1533
24	Box-24T/Box-24TI	250	224.3	30	1682.4

\* Driver bit included in each pail/box.



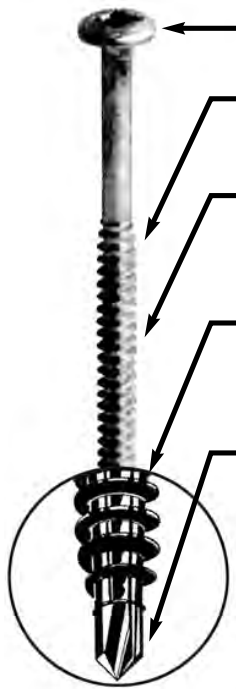

**Head:** Low profile #3 deep recess Phillips drive provides positive driving.

**Threads:** 13 deep single lead threads per inch. Universal use with wood, steel or concrete. (Concrete – pre-drill with a standard 3/16" masonry bit.)

**Corrosion protection:** TRU-KOTE coating meets or exceeds FM4470 corrosion standards. Formulated to enhance back-out resistance and withstand 30 cycles of the Kesternich DIN 50018 SFW 2.0 test.

**Back-out resistance – tapered wedge entry:** Exclusive TRUFAST TAPERED ENTRY action wedges the screw tightly into the deck, providing back-out resistance. Result: no costly call backs.

**Drill point:** A sharp drilling point provides fast and every time drilling, even in 16 gauge steel, which saves labor and eliminates screw throw-aways. Benefit: increased profits.

For more information, contact CertainTeed Commercial Roofing Technical Services at 800-396-8134 x2.

**ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:**

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE  
GYPSUM • CEILINGS • INSULATION

[www.certainteed.com](http://www.certainteed.com) <http://blog.certainteed.com>

CertainTeed Corporation  
P.O. Box 860  
Valley Forge, PA 19482

Professional: 800-233-8990  
Consumer: 800-782-8777

© 03/15 CertainTeed Corporation, Printed in the U.S.A.  
Code No. COMM-228