




# ENVIRONMENTAL PRODUCT DECLARATION

In accordance with EN 15804 and ISO 14025

## Ecophon Solo™ /Tech

Realization date: 2019-01-30  
Version: 1.0



The environmental impacts of this product have been assessed over its whole life cycle. Its Environmental Product Declaration has been verified by an independent third party.

**Ecophon**®  
SAINT-GOBAIN

A SOUND EFFECT ON PEOPLE

# Summary Environmental product declaration

Content summary	
Verified by (external third party verifier)	Martin Erlandsson, IVL Swedish Environmental Research Institute
Programme used	The International EPD System. For more information see <a href="http://www.environdec.com">www.environdec.com</a>
Registration No	S-P-01448
Owners declaration by	Saint-Gobain Ecophon AB Box 500 265 03 Hyllinge Sweden
Declaration as construction products	The products to be verified herein are acoustic glass wool panels made for sound absorbing ceilings. The present environmental product declaration complies with standard ISO 14025 and describes the environmental impact. Its purpose is to promote compatible and sustainable environmental development of related construction methods. Reference PCR document: EN 15804 as the core PCR + International EPD System Product Category Rule, PCR for constructions products and construction services, Acoustical systems solutions (sub-oriented PCR; appendix to PCR 2012:01) - previously Acoustic ceilings. EPD of construction products may not be comparable if they do not comply with EN 15804.
Validity	2024-01-28
Content of the declaration	This is a general environmental declaration of the product family SOLO/Tech. The values presented in this EPD are based on a mean value calculated from sales statistics for 2017 of the following products:  Solo Square/Tech, Solo Rectangle/Tech, Solo Circle/Tech Solo Ellipse, Solo Octagon/Tech, Solo Heptagon/Tech Solo Hexagon/Tech, Solo Pentagon/Tech Solo Triangle/Tech, Solo Baffle/Tech  The LCA values given in this EPD are not valid for any of the above products but give an average value for the SOLO/Tech family product.  Supplement EPD with detailed product information can be found at <a href="http://www.ecophon.com">www.ecophon.com</a>
UN CPC (Central Product Classification) CODE	37990 37129
Issued date	2019-01-30

Signature:



Daniel Olausson  
Product Engineer  
Saint-Gobain Ecophon AB

Third party verifier:



Martin Erlandsson, IVL  
(Independent third party verifier)

# Product description

## Product description and description of use:

This Environmental Product Declaration (EPD) describes the environmental impact of 1 m<sup>2</sup> of acoustic ceiling with the intended use to increase sound absorption in a room to create a better indoor environment.

The production site of Saint-Gobain Ecophon (Sweden) produces acoustic ceilings and wall absorbers based on glass wool with a plant based binder in different densities and thicknesses. The glass wool is covered with a painted or woven surface layer and cut into panels of different sizes and edge designs. The edges are painted and the panels are packed in cardboard boxes.

The structure of glass wool gives the material excellent sound energy absorption properties. Sound absorption is the main function of acoustic glass wool panels. The panels are also light, stable, and easy to handle and cut.

Acoustic glass wool panels are commonly used in schools, offices, health care facilities and production premises where there is a need for noise reduction to improve the working environment. The decrease in reverberation time, sound pressure level and other acoustic parameters are related to the amount of panels used in the room as well as the placement of the panels.

The acoustic panels need no maintenance and do not age. They can last as long as the building itself. For aesthetic reasons, normal room surface cleaning is advised.

## Description of the main product components and materials for 1 m<sup>2</sup> of product:

Parameter	Value (Weight in %)	Post-consumer recycled content
Product thickness	40mm	-
Glass wool	80%	70%
Water based paint	17%	-
Glass tissue	2%	-
Water based glue	1%	-
Plastic wrapping		-

*(Total weight of product is calculated to 4935g)*

All raw materials contributing more than 5% to any environmental impact are listed in the table above. The panels are free from substances of very high concern (SVHC). The product contains no substances from the REACH Candidate list (of 15.06.2018).

If there for some reason is a variation greater than 10% on the environmental effects in any of the categories of impact this EPD has to be updated and re-verified.

## Other environmental indicators

Regarding the indoor environment, the SOLO/Tech products are certified for or fulfil regulations according to the following table:

Certificate and Regulations	
Finnish M1	
French VOC A	


## LCA calculation information

Declared unit	1 m <sup>2</sup> of acoustic ceiling panel.
Functional unit	1 m <sup>2</sup> acoustic ceiling with sound absorption class A installed at an ODS of 200mm according to ISO 354.
System boundaries	Cradle to grave: Mandatory stages = A1-3, A4-5, B1-7, C1-4 and optional stage = D This EPD covers the environmental impact of acoustic panels without grid or suspension system.
Reference Service Life (RSL)	50 years
Cut-off rules	The use of cut-off criterion on mass inputs and primary energy at the unit process level (1%) and at the information module level (5%).  Flows related to human activities such as employee transport are excluded.  Biogenic carbon has not been included in calculations.  The construction of plants, production of machines and transportation systems are excluded since the related flows are supposed to be negligible compared to the production of the building product when compared at these systems lifetime level.
Allocations	Allocation criteria are based on mass.
Geographical coverage and time period	Europe 2017

According to EN 15804, EPD of construction products might not be comparable if they do not comply with this standard. According to ISO 21930, EPD's might not be comparable if they are from different EPD administrating schemes.

# Life Cycle stages

## Flow diagram of the Life Cycle

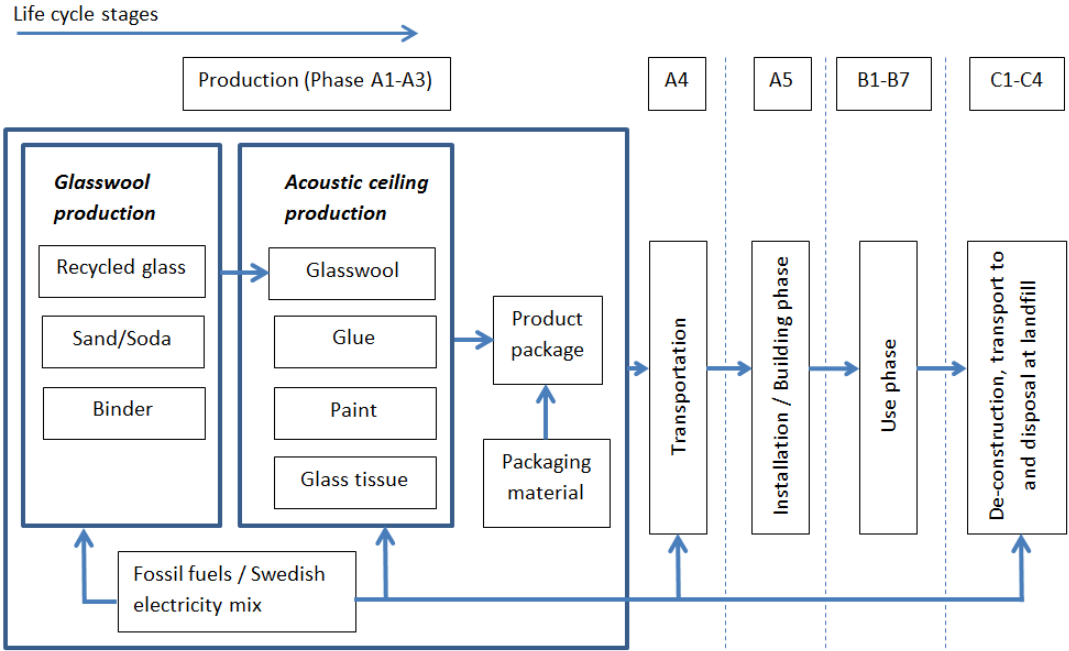

## **Product stage, A1-A3**

---

### **Description of the stage:**

The product stage of the glass wool products is divided into 3 modules: A1 "Raw material and supply", A2 "Transport to the manufacturer" and A3 "Manufacturer"

The aggregation of the modules A1, A2 and A3 is a possibility considered by the EN 15 804 standard. This rule is applied in this EPD.

### **A1 Raw material supply**

This module takes into account the extraction and processing of all raw materials and energy which occur upstream to the studied manufacturing process.

Specifically, the glass wool raw material supply covers production of the plant based binder components and sourcing (quarry) of raw materials for fiber production, e.g. sand and borax. Besides these raw materials, recycled materials (glass cullet) are also used as input. Other major raw materials are paint, glass tissue and glue which also are included in the calculation.

### **A2 Transport to the manufacturer**

The raw materials are transported to the manufacturing site. In our case, the modelling includes: road, boat or train transportations (average values) of each raw material.

### **A3 Manufacturing**

The manufacturing includes two steps; glass wool production and glass wool panel production. The glass wool panels are produced in a continuous online process starting with applying glass tissue on the glass wool baseboard. The panels are cut into correct size and the edges of the panels are painted. After drying the panels are packed in cardboard boxes.

Manufacturing covers all processes linked to production, which comprises various related operations besides on-site activities such as grinding, painting and drying, packaging and internal transportation.

The manufacturing process also yields data on the combustion of refinery products, such as natural gas, diesel and gasoline, related to the production process.

The environmental profile of these energy carriers is modelled for local conditions.

Packaging-related flows in the production process and all up-stream packaging are included in the manufacturing module, i.e. wooden pallets, cardboard and PE-film.

Apart from production of packaging material, the supply and transport of packaging material are also considered in the LCA model. They are reported and allocated to the module where the packaging is applied. Data on packaging waste created during this step is then generated.

It is assumed that packaging waste generated in the course of production and up-stream processes is 100% collected and either recycled or incinerated with energy recovery, related to material and quality, in ratios according to the local material handling companies.

## **Construction process stage, A4-A5**

---

### **Description of the stage:**

The construction process is divided into 2 modules: A4 "Transport to the building site" and A5 "Installation in the building."

### **Description of scenarios and additional technical information:**

#### **A4 Transport to the building site**

This module includes transport from the production gate to the building site.

Transport is calculated on the basis of a scenario with the parameters described in the following table.

Parameter	Value
Fuel type, consumption of fuel and vehicle or vehicle type used for transport	Average truck trailer with a 24t payload, diesel consumption 38 litres for 100 km
Distance	991 km (based on yearly statistics for 2014)
Capacity utilisation (including empty returns)	100% of the capacity in volume 30% of empty returns
Bulk density of transported products (if available)	98 kg/m <sup>3</sup>
Volume capacity utilisation factor (if available)	1

#### A5:1 Installation in the building

This module includes waste of products during the implementation, the additional production processes to compensate the loss and the waste processing which occur in this stage.

Scenarios used for quantity of product wastage and waste processing are:

Parameter	Value
Waste of materials on the building site before waste processing, generated by the product's installation (specified by type)	5%
Output materials (specified by type) as results of waste processing at the building site e.g. of collection for recycling, for energy recovering, disposal	Packaging waste is 100 % collected and modelled as recovered matter  Glass wool losses are landfilled

#### A5:2 Energy usage

As a general figure the time to install 1 m<sup>2</sup> ceiling is considered to be 20 minutes. During this time the installer is considered to use handheld appliances for about 5% of this time which in this case results in 1 minute. An average handheld appliance power usage is approximately 0,025kw/h which gives a value of  $0,025 * 0,016 = 4,16W/m^2$  ceiling. In this context it is a negligible contribution and will not be part of the LCA calculation.

### Use stage (excluding potential savings), B1-B7

#### Description of the stage:

The use stage is divided into 7 modules, B1 "Use", B2 "Maintenance", B3 "Repair", B4 "Replacement", B5 "Refurbishment", B6 "Operational energy use", B7 "Operational water use"

#### Description of scenarios and additional technical information:

Once installation is complete, no actions or technical operations are required during the use stages until the end of life stage. Therefore, glass wool ceiling panels have no impact (excluding potential energy savings) on this stage.

### End-of-life stage C1-C4

#### Description of the stage:

The end-of life stage is divided into 4 modules; C1 "De-construction, demolition", C2 "Transport to waste processing", C3 "Waste processing for reuse, recovery and/or recycling", C4 "Disposal".

#### Description of scenarios and additional technical information:

##### C1, De-construction, demolition

The de-construction and/or dismantling of glass wool ceiling panels take part during the renovation of the building or the demolition of the entire building. In our case, the environmental impact is assumed to be very small and can be neglected.

##### C2, Transport to waste processing

The model for transportation (see A4, Transportation to the building site) is applied.

### C3, Waste processing for reuse, recovery and/or recycling;

The product is considered to be landfilled without reuse, recovery or recycling.

### C4, Disposal;

The product is assumed to be 100% landfilled.

Parameter	Value/description
Collection process specified by type	4935g of acoustic ceiling (collected with mixed construction waste)
Recovery system specified by type	No reuse, recycling or energy recovery
Disposal specified by type	3920g of glass wool is landfilled
Assumptions for scenario development (e.g. transportation)	Average truck trailer with a 24t payload, diesel consumption 38 litres for 100 km 25 km (distance to landfill)

## Reuse/recovery/recycling potential, D

### Description of scenarios and additional technical information:

Packaging waste from module A5 is reported in this module as recovered matter.

## LCA results

LCA model, aggregation of data and environmental impact are calculated from the TEAM™ software 5.2.

Raw materials and energy consumption, as well as transport distances have been taken directly from the manufacturing plant of Saint-Gobain Ecophon in 2017.

Summary of the LCA results are detailed on the following tables.

All results in the EPD are written in logarithmic base of ten. Reading example:  $5.2E-03 = 5.2 * 10^{-3} = 0,0052$ .

MND (module not declared), is equal to MNA (module not assessed).

## Reference list

**ISO 354:2003** : Acoustics – Measurement of sound absorption in a reverberation room

**Finnish M1**: Emission classification of building materials (M1 Classification): general instructions 12 November 2014








**French VOC** : Décret no 2011-321 du 23 mars 2011 relatif à l'étiquetage des produits de construction ou de revêtement de mur ou de sol et des peintures et vernis sur leurs émissions de polluants volatils

**Reach** : EU REACH Regulation (EC) No 1907/2006









**LCA report**: 18 12 11 GENERAL REPORT ON ECOPHON LCA






## Environmental impact.

Environmental impacts															
Parameters	Product stage	Construction process stage		Use stage							End-of-life stage			D Reuse, recovery, recycling	
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing		C4 Disposal
 Global Warming Potential (GWP) - kg CO <sub>2</sub> equiv/FU	6,92E +00	1,01E +00	4,22E -01	0	0	0	0	0	0	0	0	2,49E -02	0	3,38E -02	MND
The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas, carbon dioxide, which is assigned a value of 1.															
 Ozone Depletion (ODP) kg CFC 11 equiv/FU	4,52E -07	7,27E -07	6,51E -08	0	0	0	0	0	0	0	0	1,80E -08	0	1,79E -08	MND
Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halogens), which break down when they reach the stratosphere and then catalytically destroy ozone molecules.															
 Acidification potential (AP) kg SO <sub>2</sub> equiv/FU	4,45E -02	4,62E -03	2,66E -03	0	0	0	0	0	0	0	0	1,14E -04	0	2,69E -04	MND
Acid depositions have negative impacts on natural ecosystems and the man-made environment incl, buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.															
 Eutrophication potential (EP) kg (PO <sub>4</sub> ) <sup>3-</sup> equiv/FU	1,05E -02	1,08E -03	5,48E -04	0	0	0	0	0	0	0	0	2,68E -05	0	5,18E -05	MND
Excessive enrichment of waters and continental surfaces with nutrients, and the associated adverse biological effects.															
 Photochemical ozone creation (POPC) kg Ethene equiv/FU	4,95E -03	7,20E -04	2,85E -04	0	0	0	0	0	0	0	0	1,78E -05	0	5,19E -05	MND
Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.															
 Abiotic depletion potential for non-fossil resources (ADP-elements) - kg Sb equiv/FU	8,16E -06	2,73E -10	3,44E -07	0	0	0	0	0	0	0	0	6,76E -12	0	1,82E -08	MND
 Abiotic depletion potential for fossil resources (ADP-fossil fuels) - MJ/FU	1,11E +02	1,29E +01	6,71E +00	0	0	0	0	0	0	0	0	3,19E -01	0	7,66E -01	MND
Consumption of non-renewable resources, thereby lowering their availability for future generations.															





## Resource use

Resource use															
Parameters	Product stage	Construction process stage		Use stage							End-of-life stage			D Reuse, recovery, recycling	
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing		C4 Disposal
 Use of renewable primary energy excluding renewable primary energy resources used as raw materials - MJ/FU	2,39E+01	6,29E-03	1,21E+00	0	0	0	0	0	0	0	0	1,56E-04	0	1,57E-02	MND
 Use of renewable primary energy used as raw materials MJ/FU	3,87E+00	0	1,94E-01	0	0	0	0	0	0	0	0	0	0	0	MND
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ/FU	2,78E+01	6,29E-03	1,40E+00	0	0	0	0	0	0	0	0	1,56E-04	0	1,57E-02	MND
 Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials - MJ/FU	1,31E+02	1,30E+01	7,72E+00	0	0	0	0	0	0	0	0	3,21E-01	0	7,65E-01	MND
 Use of non-renewable primary energy used as raw materials MJ/FU	5,00E+00	0	2,50E-01	0	0	0	0	0	0	0	0	0	0	0	MND
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU	1,36E+02	1,30E+01	7,97E+00	0	0	0	0	0	0	0	0	3,21E-01	0	7,65E-01	MND
 Use of secondary material kg/FU	2,25E+00	0	1,12E-01	0	0	0	0	0	0	0	0	0	0	0	MND
 Use of renewable secondary fuels - MJ/FU	0	0	0	0	0	0	0	0	0	0	0	0	0	0	MND
 Use of non-renewable secondary fuels - MJ/FU	0	0	0	0	0	0	0	0	0	0	0	0	0	0	MND
 Use of net fresh water - m <sup>3</sup> /FU	8,04E-02	1,23E-03	4,91E-03	0	0	0	0	0	0	0	0	3,05E-05	0	6,53E-04	MND


## Waste categories

Waste categories															
Parameters	Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Hazardous waste disposed kg/FU	3,67E-01	3,93E-04	1,21E-02	0	0	0	0	0	0	0	0	9,73E-06	0	3,06E-04	MND
 Non-hazardous waste disposed kg/FU	3,96E+00	1,07E-03	4,41E-01	0	0	0	0	0	0	0	0	2,64E-05	0	4,84E+00	MND
 Radioactive waste disposed kg/FU	1,08E-04	0	4,70E-06	0	0	0	0	0	0	0	0	0	0	3,97E-06	MND

## Out flows

Output flows															
Parameters	Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Components for re-use kg/FU	0	0	0	0	0	0	0	0	0	0	0	0	0	0	MND
 Materials for recycling kg/FU	2,03E+00	5,35E-06	3,09E-01	0	0	0	0	0	0	0	0	0	0	0	MND
 Materials for energy recovery kg/FU	0	0	0	0	0	0	0	0	0	0	0	0	0	0	MND
 Exported energy, detailed by energy carrier MJ/FU	2,83E-03	0	1,41E-04	0	0	0	0	0	0	0	0	0	0	0	MND

# LCA interpretation

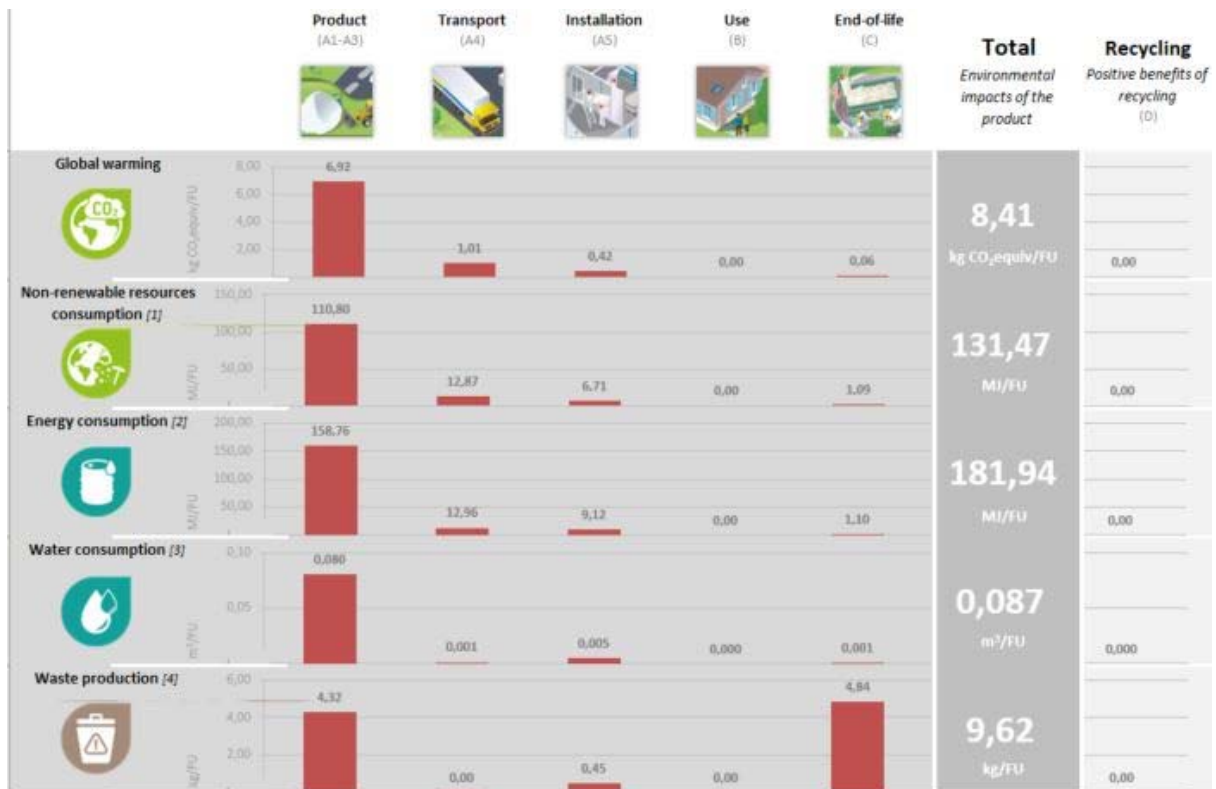

[1] This indicator corresponds to the abiotic depletion potential of fossil resources.

[2] This indicator corresponds to the total use of primary energy.

[3] This indicator corresponds to the use of net fresh water.

[4] This indicator corresponds to the sum of hazardous, non-hazardous and radioactive waste disposed.