


SA-N-4-S

Modified base sheet(s) mechanically attached through substrate, one or two self-adhered modified interply sheets, and self-adhered modified cap sheet

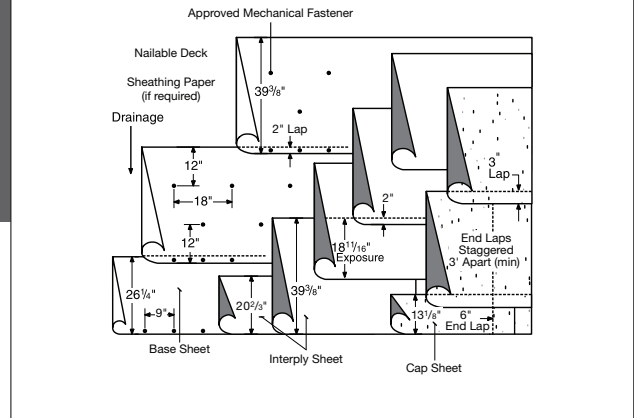

SUBSTRATE:

- Concrete (Sec. 3.6-3.9)
- Wood (Sec. 3.10-3.11)
- Poured Gypsum (Sec. 3.12)
- Wood Fiber (Sec. 3.13)
- Re-cover (Sec. 5.0)

MAXIMUM SLOPE:

Up to 6" : 12" (Sec. 15.3)

ROOF ASSEMBLY:

Approved base sheet mechanically attached to approved substrate (Sec. 15.0).

Approved interply sheets, self-adhered (Sec. 10.0).

Approved cap sheet, self-adhered (Sec. 10.0).

CONFIGURATION ONE:

SUMMARY OF MATERIALS:

- Base sheet (1 ply)
- Interply sheets (2 plies)
- Cap sheet (1 ply)

APPROVED BASE SHEETS:

- Flintlastic SA NailBase

INTERPLY SHEETS (2 PLIES):

(two of the following)

- Flintlastic SA PlyBase
- Flintlastic SA MidPly

APPROVED CAP SHEETS:

(one of the following)

- Flintlastic SA Cap*
- Flintlastic SA Cap FR*

FINAL SURFACING:

For optional surfacing see Section 14.0.

CONFIGURATION TWO:

SUMMARY OF MATERIALS:

- Base sheet (2 plies)
- Interply sheets (1 ply)
- Cap sheet (1 ply)

APPROVED BASE SHEETS (2 PLIES):

(one of each of the following)

- Glasbase Base Sheet¹
- Flintlastic SA NailBase

INTERPLY SHEETS (1 PLY):

(one of the following)

- Flintlastic SA PlyBase
- Flintlastic SA MidPly

APPROVED CAP SHEETS:

(one of the following)

- Flintlastic SA Cap*
- Flintlastic SA Cap FR*

FINAL SURFACING:

For optional surfacing see Section 14.0.

FLASHING ASSEMBLY:

- **Standard.** Over a base sheet or bonded to a primed substrate. One ply of Flintlastic modified cap sheet, per CT detail.
- **Premium.** Over a base sheet or bonded to a primed substrate. One smooth and one granulated modified membrane flashing, per CT detail.
- **Premium alternate.** Over a base sheet or bonded to a primed substrate. One smooth modified membrane and CT SmartFlash[®], per CT detail.

Cants: In angles of roof deck and vertical surfaces, the roofing contractor shall furnish and install an approved cant strip with a minimum 3" face.

* Available with CoolStar[®] reflective granules

¹ In Configuration Two, Glasbase Base Sheet and Flintlastic SA NailBase are gang fastened to a substrate with Flintlastic SA NailBase on top.

WARRANTY DURATIONS FOR THIS SPECIFICATION VARY BASED ON ROLL MATERIAL SELECTION; SEE WARRANTY MATRIX.

Applicable local building code may require more stringent installation requirements such as, but not limited to, increased fastener or adhesive densities to meet required wind uplift pressures. Consult local building code and uplift requirements prior to any application of CertainTeed roofing materials. CertainTeed is not responsible for failure to install roofing products per applicable local building codes.