



The Symphony *m* 70 portfolio, which includes the Symphony *m* Rx line, provides a full range of ultra-durable acoustic solutions with a consistent, smooth visual, coupled with excellent durability.

### FEATURES AND BENEFITS

- Excellent sound absorption (NRC 0.70) and sound blocking (CAC 33-41)
- Certified clean room component to ISO Class 3 (Symphony *m* Rx) and ISO Class 4 (Symphony *m*)
- Symphony *m* Rx tested to 2,000 wash cycles and compatible with most sanitizing solutions; Symphony *m* tested to 1,000 wash cycles
- Exceeds FGI guidelines for cleanability and acoustic performance; Rx Solution satisfies USDA/FSIS guidelines for sanitary applications (commercial kitchens)
- SmartFit panels available - fully fabricated off-the-shelf solution to accommodate linear lighting, ventilation and utility areas with standard components

The **Symphony *m* Collection** also includes High NRC & High CAC solutions.  
For more information, please contact your local sales representative or call 800-233-8990

### ALL PRODUCTS IN THIS LINE FEATURE THESE ATTRIBUTES



**NRC  
UP TO 0.70**



**SAG RESISTANT**



**FIRE RATING:  
CLASS A**



**BIOSHIELD®  
MOLD/MILDEW  
RESISTANT**



**LOW  
VOC**

**EMISSION COMPLIANT  
CERTIFIED**



**WASHABLE W/  
SANITIZING  
CHEMICALS**



**LR 0.90**

**CertaSize® Program**  
Non-standard sizes made to order on select products. One carton minimum. Lead time varies. Contact your local sales rep or Customer Support

### CERTIFICATIONS & PRODUCT DECLARATIONS



**EPD AVAILABLE**



**HPD AVAILABLE**



**Declare™**  
Living Building Challenge Red List Free®  
Declare™ is a service mark of The International Living Future Institute.


### LEED® v4

RECYCLED CONTENT	62%	
	PRE: 60%	POST: 2%

- ✓ EQ: Optimize Energy Performance
- ✓ EA: Prereq. Min. Energy Performance
- ✓ EQ: Interior Lighting
- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Acoustic Performance
- ✓ EQ: Prereq. Min. Acoustic Performance (Schools)
- ✓ EQ: Low-Emitting Materials
- ✓ EQ: Daylight
- ✓ MR: Material Ingredients (HPDs)
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declarations (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning


LEED® is a registered trademark of the U.S. Green Building Council.

**SYMPHONY *m 70***




		FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET
<b>TRIM</b>										
	1222-IOF-1	Panels	24 x 24 x 3/4	0.70	33	62%	14	56	56	16
	1220-IOF-1	Panels	24 x 48 x 3/4	0.70	35	62%	8	64	64	16
	1223-IOF-1	Panels	30 x 30 x 3/4	0.70	39	62%	8	50	50	28
	1229-IOF-1	Panels	30 x 60 x 3/4	0.70	41	62%	8	100	100	16
	12220-60-IOF-1	Planks	20 x 60 x 3/4	0.70	39	62%	8	66	66	24
	1221-IOF-1	Planks	24 x 60 x 3/4	0.70	36	62%	8	80	80	16
	1228-IOF-1	Planks	24 x 72 x 3/4	0.70	37	62%	8	96	96	16
	12204-48-IOF-1	SmartFit	4 x 48 x 3/4	0.70	-	62%	48	64	64	16
	12206-48-IOF-1	SmartFit	6 x 48 x 3/4	0.70	-	62%	32	64	64	16
	12212-24-IOF-1	SmartFit	12 x 24 x 3/4	0.70	-	62%	28	56	56	16
	12212-48-IOF-1	SmartFit	12 x 48 x 3/4	0.70	-	62%	16	64	64	16
	12212-60-IOF-1	SmartFit	12 x 60 x 3/4	0.70	-	62%	16	80	80	16

<b>REVEAL</b>										
	1222BB-IOF-1	Panels	24 x 24 x 3/4	0.70	33	62%	14	56	56	16
	1220BB-IOF-1	Panels	24 x 48 x 3/4	0.70	35	62%	8	64	64	16
	12220-60BB-IOF-1	Planks	20 x 60 x 3/4	0.70	39	62%	8	66	66	24
	1221BB-IOF-1	Planks	24 x 60 x 3/4	0.70	36	62%	8	80	80	16
	1228BB-IOF-1	Planks	24 x 72 x 3/4	0.70	37	62%	8	96	96	16
	12204-48BB-IOF-1	SmartFit	4 x 48 x 3/4	0.70	-	62%	48	64	64	16
	12206-48BB-IOF-1	SmartFit	6 x 48 x 3/4	0.70	-	62%	32	64	64	16
	12212-24BB-IOF-1	SmartFit	12 x 24 x 3/4	0.70	-	62%	28	56	56	16
	12212-48BB-IOF-1	SmartFit	12 x 48 x 3/4	0.70	-	62%	16	64	64	16
	12212-60BB-IOF-1	SmartFit	12 x 60 x 3/4	0.70	-	62%	16	80	80	16

<b>NARROW REVEAL</b>										
	1222BF-IOF-1	Panels	24 x 24 x 3/4	0.70	33	62%	14	56	56	16
	1220BF-IOF-1	Panels	24 x 48 x 3/4	0.70	35	62%	8	64	64	16
	12220-60BF-IOF-1	Planks	20 x 60 x 3/4	0.70	39	62%	8	66	66	24
	1221BF-IOF-1	Planks	24 x 60 x 3/4	0.70	36	62%	8	80	80	16
	1228BF-IOF-1	Planks	24 x 72 x 3/4	0.70	37	62%	8	96	96	16
	12204-48BF-IOF-1	SmartFit	4 x 48 x 3/4	0.70	-	62%	48	64	64	16
	12206-48BF-IOF-1	SmartFit	6 x 48 x 3/4	0.70	-	62%	32	64	64	16
	12212-24BF-IOF-1	SmartFit	12 x 24 x 3/4	0.70	-	62%	28	56	56	16
	12212-48BF-IOF-1	SmartFit	12 x 48 x 3/4	0.70	-	62%	16	64	64	16
	12212-60BF-IOF-1	SmartFit	12 x 60 x 3/4	0.70	-	62%	16	80	80	16

<b>METRIC TRIM</b>										
	12220-60-IOF-IM	Panels	500 x 1500 x 19	0.70	38	62%	8	6	96	16
	1220-IOF-IM	Panels	600 x 1200 x 19	0.70	35	62%	8	5.8	49	32
	1222-IOF-IM	Panels	600 x 600 x 19	0.70	33	62%	14	5	55	16
	1229-IOF-IM	Panels	750 x 1500 x 19	0.70	40	62%	8	9	64	24
	1223-IOF-IM	Panels	750 x 750 x 19	0.70	38	62%	8	4.5	62	16


# SYMPHONY *m* 70 Rx

		FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET
<b>TRIM</b>										
	1222-RXS-1	Panels	24 x 24 x 3/4	0.70	33	62%	14	56	47	20
	1220-RXS-1	Panels	24 x 48 x 3/4	0.70	35	62%	8	64	64	16
<b>REVEAL</b>										
	1222B-RXS-1	Panels	24 x 24 x 3/4	0.70	33	62%	14	56	56	16
	1220B-RXS-1	Panels	24 x 48 x 3/4	0.70	35	62%	8	64	64	16
<b>NARROW REVEAL</b>										
	1222F-RXS-1	Panels	24 x 24 x 3/4	0.70	33	62%	14	56	56	16
	1220F-RXS-1	Panels	24 x 48 x 3/4	0.70	35	62%	8	64	64	16

## ACCESSORIES

SYMPHONY <i>m</i> ACCESSORIES	PRODUCT NAME	PIECES/CARTON	USE
	1170-SEL-1 Mineral Fiber Edge Sealant	1	For re-sealing cut edges; 1 quart container
	STBAR-2 2' Stabilizer Bar	40	Recommended one pc/panel for all 2x5 and 2x6 narrow reveal installations
	STBAR-4 4' Stabilizer Bar	40	Recommended one pc spanning two panels in 2x5 and 2x6 narrow reveal installations

## EDGE DETAILS

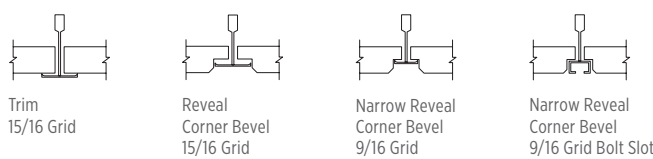

## PHYSICAL DATA

### MATERIAL

Mineral Fiber

### FIRE CLASS

All are Class A per ASTM E84 & CAN S102  
Flame Spread: 25 or less  
Smoke Developed: 50 or less

### ASTM E1264 CLASSIFICATION

Type IV, Form 2, Pattern E

### VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

### APPLICATION CONSIDERATIONS

Clean panel using a sponge/cloth dampened with water and mild liquid detergent solution. Do not soak panel. Cleanable with sanitizing chemicals.

### MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold and mildew resistance.

### WARRANTY

10-year 104/90 Limited Warranty increases to 15 years when installed with CertainTeed suspension systems. Full warranty information can be found at [certainteed.com/ceilings](http://certainteed.com/ceilings).



## CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS  
20 Moores Road, Malvern, PA 19355 800-233-8990 [certainteed.com/architectural](http://certainteed.com/architectural)