



Smooth fabric surface envelopes fiberglass panel and offers outstanding sound performance.

**FEATURES AND BENEFITS**

- Smooth, Texona fabric surface texture
- Use as a complement and/or alternative to accoustical ceiling panels for excellent performance within a space
- Attractive non-directional fissured pattern to aid in quick installation
- Available in 18 colors
- Moisture resistant

**ATTRIBUTES**



RECYCLED  
CONTENT



BIOSHIELD®  
MOLD/MILDEW  
RESISTANT



LR 0.81  
(SEA SALT)

**LEED® v4**

RECYCLED CONTENT	53%	
	PRE: 0%	POST: 53%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Acoustic Performance
- ✓ EQ: Prereq. Min. Acoustic Performance (Schools)
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declarations (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.


**CERTIFICATIONS &  
PRODUCT DECLARATIONS**



EPD AVAILABLE

# ECOPHON® AKUSTO™ WALL C TEXONA

## COLORS

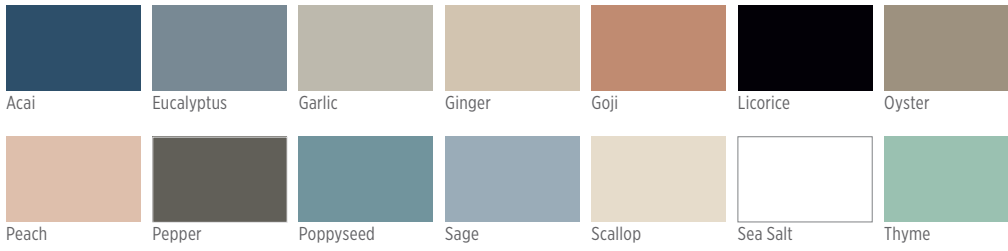

## AKUSTO WALL C TEXONA PANELS


WALL PANEL		COLOR	DIMENSIONS MM(IN.)	NRC	LR	RECYCLED CONTENT	PIECES/ CARTON	SQ. FT./ CARTON	LBS./ CARTON	
	NRC .95	3557 1002	Garlic	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.52	53%	4	21.3 (≈ 70)	71
		3557 1004	Pepper	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.17	53%	4	21.3 (≈ 70)	71
		3557 1005	Licorice	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.05	53%	4	21.3 (≈ 70)	71
		3557 1011	Ginger	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.56	53%	4	21.3 (≈ 70)	71
		3557 1012	Tangerine	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.27	53%	4	21.3 (≈ 70)	71
		3557 1050	Menthol	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.18	53%	4	21.3 (≈ 70)	71
		3557 1051	Mustard	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.45	53%	4	21.3 (≈ 70)	71
		3557 1056	Oyster	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.32	53%	4	21.3 (≈ 70)	71
		3557 1060	Sea Salt	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.81	53%	4	21.3 (≈ 70)	71
		3557 1063	Cranberry	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.15	53%	4	21.3 (≈ 70)	71
		3557 1064	Acai	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.11	53%	4	21.3 (≈ 70)	71
		3557 1065	Thyme	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.47	53%	4	21.3 (≈ 70)	71
		3557 1066	Poppyseed	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.28	53%	4	21.3 (≈ 70)	71
		3557 1081	Goji	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.27	53%	4	21.3 (≈ 70)	71
3557 1082	Peach	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.55	53%	4	21.3 (≈ 70)	71		
3557 1083	Sage	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.40	53%	4	21.3 (≈ 70)	71		
3557 1080	Eucalyptus	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.23	53%	4	21.3 (≈ 70)	71		
3557 1084	Scallop	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.76	53%	4	21.3 (≈ 70)	71		

## ACCESSORIES

AKUSTO WALL C TEXONA ACCESSORIES	PRODUCT NAME	PIECES/ CARTON	USE
	2630 0214 Connect Fixing Bracket	260	For direct fixing of Connect WP Profile to structure
	2631 1050 Connect WP Space Bar (Galvanized)	10	For use in conjunction with WP Profile when Akusto Wall C panels are installed vertically
	2631 1051 Connect WP Profile Connect (White 03)	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted
	2631 1052 Connect WP Profile (Natural 02)	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted
	2631 1074 Connect WP Profile (Black 01)	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted
	2631 1057 Connect WP External Corner (White 03)	4	Used in conjunction with WP Profile to create 90 degree outside corners
	2631 1058 Connect WP External Corner (Grey 02)	4	Used in conjunction with WP Profile to create 90 degree outside corners
	2631 1059 Connect WP External Corner (Black 01)	4	Used in conjunction with WP Profile to create 90 degree outside corners
	2630 0933 WP Profile Splice	4	For use when running multiple lengths of WP Profile end-to-end
	2630 0219 Connect Spline (Black)	100	For use in the kerf between Akusto Wall C panels when they are installed vertically
	2630 0132 Connect Direct Fixing Plate (Akusto Wall C)	100	For direct fixing of Akusto Wall C panels when they are installed horizontally
	2630 0976 2630 0970 2630 0971 Connect Thinline Profile	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted

\*Connect Edge Sealant is available in all standard colors. Please contact your local Sales Representative or call 800-233-8990.

## EDGE DETAILS



Kerfed Edge

## PHYSICAL DATA

**MATERIAL**  
Fiberglass

**FIRE CLASS (ASTM E1264)**  
Tested according to ASTM E84 & CAN S102  
Flame Spread: 25 or less  
Smoke Developed: 50 or less

**MOLD/MILDEW RESISTANCE**  
Fiberglass substrate is inherently resistant to the growth of mold and mildew.

**MAINTENANCE**  
Wipe with a soft cloth or vacuum with brush attachment.

**WARRANTY**  
10-year Ecophon Warranty.  
Full warranty information can be found at [certainteed.com/warranty](http://certainteed.com/warranty).

