



The Symphony f Rx line provides a white, clean, monolithic ceiling visual. Superior stain resistance and water repellency make this product ideal for healthcare and kitchen applications.

FEATURES AND BENEFITS

- Superior sound absorption (NRC 0.95)
- Superior stain resistance and water repellency
- Washable with most sanitizing solutions and wash-tested to 2,000 wash cycles
- Exceeds FGI guidelines for cleanability and acoustic performance in most healthcare applications
- Satisfies USDA/FSIS guidelines for sanitary applications (commercial kitchens)
- Certified VOC compliant

ATTRIBUTES



**SAG
RESISTANT**



**MOLD/MILDEW
RESISTANT
INHERENT**



LR 0.90



**WASHABLE
W/SANITIZING
CHEMICALS**



**EMISSION
COMPLIANT
CERTIFIED**



**RECYCLED
CONTENT
29-35%**

LEED® v4

RECYCLED CONTENT	up to 35%
-------------------------	------------------

- ✓ EA: Optimize Energy Performance
- ✓ EA: Prereq. Min. Energy Performance
- ✓ EQ: Interior Lighting
- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Acoustic Performance
- ✓ EQ: Prereq. Min. Acoustic Performance (Schools)
- ✓ EQ: Low-Emitting Materials
- ✓ EQ: Daylight
- ✓ MR: Material Ingredients (HPDs)
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declarations (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS

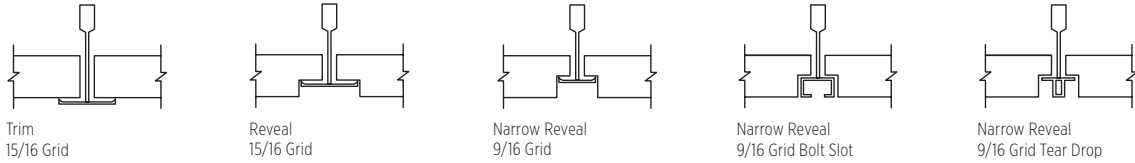


EPD AVAILABLE






HPD AVAILABLE

SUSPENSION SYSTEM OPTIONS




SYMPHONY f Rx

	Format	Dimensions (in.)	NRC	CAC	Recycled Content	Pieces/carton	Sq. Ft./carton	Lbs./carton	Cartons/pallet	
TRIM										
	Panels	1342-RXS-1	24 x 24 x 1	0.95	—	31%	24	96	34	14
		1340-RXS-1	24 x 48 x 1	0.95	—	31%	12	96	34	14
REVEAL										
	Panels	1342B-RXS-1	24 x 24 x 1	0.95	—	29%	24	96	42	14
		1340B-RXS-1	24 x 48 x 1	0.95	—	29%	12	96	42	14
NARROW REVEAL										
	Panels	1342F-RXS-1	24 x 24 x 1	0.95	—	29%	24	96	34	14
		1340F-RXS-1	24 x 48 x 1	0.95	—	29%	12	96	42	14

CAC range of 24-25 achieved with CAC foil backing. CAC Foil Backing is available for the Symphony f Rx line as a special order.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

ACCESSORIES

SYMPHONY f Rx ACCESSORIES	Product Name	Pieces/carton	Use
	1400-SEL-1 Fiberglass Edge Sealant	1	For re-sealing cut edges; 1 quart container

PHYSICAL DATA

MATERIAL

Fiberglass

ASTM E1264 CLASSIFICATION

Type XII, Form 2, Pattern E

FIRE CLASS (ASTM E1264)

All are Class A per ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

MOLD/MILDEW RESISTANCE

Fiberglass substrate is inherently resistant to the growth of mold and mildew.

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017

MAINTENANCE

Wash tested to 2,000+ cycles. Cleanable with sanitizing chemicals.

WARRANTY

10-year 104/95 Limited Warranty increases to 15 years when installed with CertainTeed suspension systems. Full warranty information can be found at certainteed.com/architectural.



CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
 20 Moores Road, Malvern, PA 19355 800-366-4327 certainteed.com/architectural