



Photo: ©Geoff Lyons

The Symphony *m* Rx line provides a white, clean, monolithic ceiling visual. Design with other products in the Symphony Rx line for acoustical solutions.

**FEATURES AND BENEFITS**

- Excellent sound absorption (NRC 0.70 & 0.80) and sound blocking (CAC 33-42)
- Exceptional durability, combined with superior stain resistance, water repellency and humidity resistance
- Tested to 2,000 wash cycles and compatible with most sanitizing solutions
- Satisfies USDA/FSIS guidelines for sanitary applications (commercial kitchens)
- Exceeds FGI guidelines for cleanability and acoustic performance in most healthcare applications
- Suited as clean room component to ISO Class 3 (highest among comparable products)

**ATTRIBUTES**

 <b>NRC UP TO 0.80</b>	 <b>SAG RESISTANT</b>	 <b>BIOSHIELD® MOLD/MILDEW RESISTANT</b>
 <b>LOW VOC</b> <b>EMISSION COMPLIANT CERTIFIED</b>	 <b>WASHABLE W/ SANITIZING CHEMICALS</b>	 <b>LR 0.90</b>

**CertaSize® Program**  
 Non-standard sizes made to order on select products. Lead time varies. Contact your local sales rep or Customer Support

**CERTIFICATIONS & PRODUCT DECLARATIONS**

 <b>EPD AVAILABLE</b>	 <b>HPD AVAILABLE</b>	 <b>USDA CERTIFIED BIOBASED PRODUCT</b>	<b>Declare™</b> Living Building Challenge Red List Free® <small>Declare™ is a service mark of The International Living Future Institute.</small>
--------------------------	--------------------------	--	--

**LEED® v4**


RECYCLED CONTENT	62%	
	PRE: 60%	POST: 2%

- ✓ EQ: Optimize Energy Performance
- ✓ EA: Prereq. Min. Energy Performance
- ✓ EQ: Interior Lighting
- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Acoustic Performance
- ✓ EQ: Prereq. Min. Acoustic Performance (Schools)
- ✓ EQ: Low-Emitting Materials
- ✓ EQ: Daylight
- ✓ MR: Material Ingredients (HPDs)
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declarations (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning


LEED® is a registered trademark of the U.S. Green Building Council.


# SYMPHONY® m 80 Rx


## SYMPHONY® m 70 Rx


SYMPHONY m 80 Rx		FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET	
TRIM											
	NRC .80	1222-80-RXS-1	Panels	24 x 24 x 7/8	0.80	40	62%	14	56	64	16
		1220-80-RXS-1	Panels	24 x 48 x 7/8	0.80	42	62%	8	64	74	14

REVEAL											
	NRC .80	1222B-80-RXS-1	Panels	24 x 24 x 7/8	0.80	40	62%	14	56	64	16
		1220B-80-RXS-1	Panels	24 x 48 x 7/8	0.80	42	62%	8	64	74	14

NARROW REVEAL											
	NRC .80	1222F-80-RXS-1	Panels	24 x 24 x 7/8	0.80	40	62%	14	56	64	16
		1220F-80-RXS-1	Panels	24 x 48 x 7/8	0.80	42	62%	8	64	74	14


SYMPHONY m 70 Rx		FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET	
TRIM											
	NRC .70	1222-RXS-1	Panels	24 x 24 x 3/4	0.70	35	62%	14	56	56	16
		1220-RXS-1	Panels	24 x 48 x 3/4	0.70	35	62%	8	64	64	16

REVEAL											
	NRC .70	1222B-RXS-1	Panels	24 x 24 x 3/4	0.70	35	62%	14	56	56	16
		1220B-RXS-1	Panels	24 x 48 x 3/4	0.70	35	62%	8	64	64	16

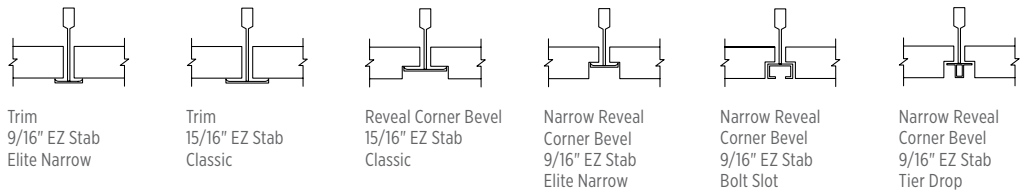
NARROW REVEAL											
	NRC .70	1222F-RXS-1	Panels	24 x 24 x 3/4	0.70	35	62%	14	56	56	16
		1220F-RXS-1	Panels	24 x 48 x 3/4	0.70	35	62%	8	64	64	16

# SYMPHONY® m 80 Rx SYMPHONY® m 70 Rx

## ACCESSORIES

SYMPHONY m ACCESSORIES	PRODUCT NAME	PIECES/ CARTON	USE
	1170-SEL-1 Mineral Fibre Edge Sealant	1	For re-sealing cut edges; 1 quart container

## EDGE DETAILS



## PHYSICAL DATA

**MATERIAL**  
Mineral Fibre

**ASTM E1264 CLASSIFICATION**  
Type IV, Form 2, Pattern E

**FIRE CLASS**  
As per CAN/ULC S102  
Flame Spread: 25 or less  
Smoke Developed: 50 or less

**VOC EMISSIONS**  
Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

**MOULD/MILDEW RESISTANCE**  
BioShield treatment included for added mould and mildew resistance.

**APPLICATION CONSIDERATIONS**  
Clean panel using a sponge/cloth dampened with water and mild liquid detergent solution. Do not soak panel. Cleanable with sanitizing chemicals.

**WARRANTY**  
10-year 104/90 Limited Warranty increases to 15 years when installed with CertainTeed suspension systems. Full warranty information can be found at [certainteed.ca/warranty](http://certainteed.ca/warranty).



### CertainTeed ARCHITECTURAL PRODUCTS

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS  
2424 Lakeshore Rd. West, Mississauga, ON L5J 1K4 800-233-8990 [certainteed.ca/architectural](http://certainteed.ca/architectural)