



QuietRock[®] ES

HIGHER PERFORMANCE, HIGHER RELIABILITY LOWER COST SOUNDPROOFING SOLUTIONS.




Lowest cost, true score and snap with EZ-SNAP technology

QuietRock ES is the first sound damped drywall that easily scores and snaps using breakthrough EZ-SNAP technology. QuietRock ES has no paper or metal in the center, offering easy score and snap like standard drywall, yet still providing acoustical ratings up to STC 60 on single stud construction. This patent pending product is easier and less expensive to install than any other noise reducing drywall and is ideal for residential and commercial construction.

QuietRock ES Benefits

- Powered by EZ-SNAP for true score and snap
- 4x easier to snap than any other acoustical drywall
- Faster to install for increased productivity and lower labor costs
- Less materials save time, money and waste
- Maximizes usable floor space by using just a single layer
- Outperforms other noise reduction methods, including soundboard and resilient channel
- High reliability: unlike resilient channel, cannot be easily short circuited
- Abrasion resistant paper

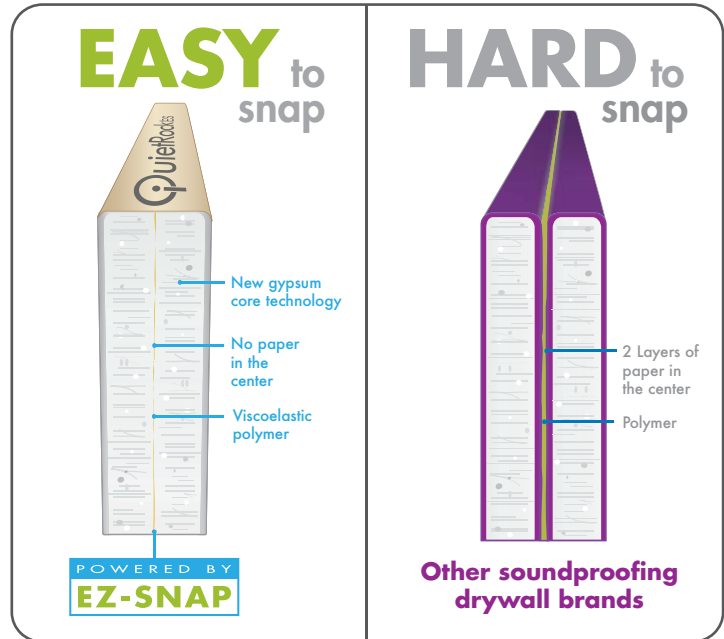

Product Ordering Codes

4' x 8' panel (122cm x 244 cm): 313760


Product Specifications

Model:	QuietRock ES
Thickness:	5/8", tapered edges
Weight:	2.6 lbs/sqft
STC-rated:	51-60 (ASTM E90)
Fire-rated:	1 hour, Type X
UL Assemblies:	U017, U026, U032, U040, U204, U207, U301, U302, U305, U309, U314, U326, U329, U330, U332, U337, U338, U339, U340, U341, U342, U344, U351, U354, U355, U356, U357, U358, U360, U364, U369, U374, U376, U379, U386, U411, U418, U420, U421, U425, U434, U439, U442, U449, U450, U460, U465, U466, U467, U473, U475, U485, U487, U494, U502, U504, U505, U510, U512, U531, U609, U615, U617, U622, U623, U626, U633, U646, U647, U648, U651, U652, U926, V417, V419, V420, V421, V430, V432, V434, V463, V464, X508, X516, X517, X525, X526, X528
ULC Assemblies:	W313, W317, W322, W404, W412, W413, W415, W433, W447, W459, W460, W465

Applications

- Multi-family
- Commercial
- Hospitals
- Hotels
- Schools
- Party walls

4 Times Easier to Snap Than Any Other Acoustic Drywall

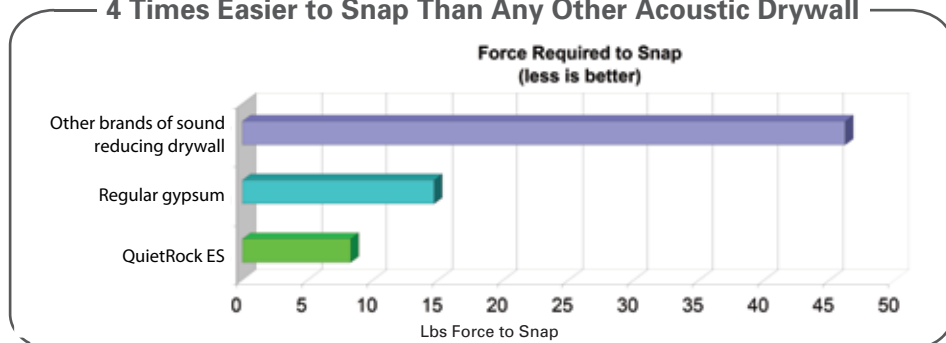


Distributed in Canada by:

Common Wall Assemblies*

Lowest Cost Wall


QuietRock ES on one side,
Type X on the other



STC: 48

Single Stud Wall

QuietRock ES on both sides



STC: 52

Single Steel Stud Wall


QuietRock ES on one side,
Type X on the other



STC: 52

Single Steel Stud Wall

QuietRock ES on both sides



STC: 55

STC Comparison*

15.9 mm (5/8") gypsum	39
152.3 mm (6") CMU	45
Mass loaded vinyl	45
QuietRock ES	48-52
*in single wood stud, 610 mm (24") OC	

*STCs shown are on 610 mm (24") OC

See Acoustic and Fire Assemblies document for more information.

The information contained in this document is for general information purposes only. Features and specifications are subject to change. The diagrams and stated STC ratings listed are intended to serve as a guide. Construction practices have an influence on final STC ratings. Serious Materials cannot guarantee actual STC ratings. Flanking sound patterns, the integrity of the wall, and floor and ceiling construction are important factors in effective sound control.