


# BUR(G)-N-3-A

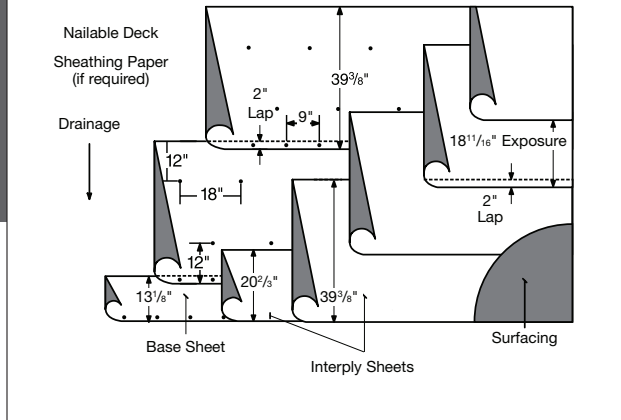

**BUR or SBS base sheet mechanically attached through substrate, two adhered BUR interply sheets and final surfacing**

## SUBSTRATE:

- Concrete (Sec. 3.6-3.9)
- Wood (Sec. 3.10-3.11)
- Poured Gypsum (Sec. 3.12)
- Wood Fiber (Sec. 3.13)
- Re-cover (Sec. 5.0)

## MAXIMUM SLOPE:

Up to 3" : 12" (Sec. 15.3)

## ROOF ASSEMBLY:

Approved base sheet, mechanically attached to approved substrate (Sec. 15.0).

Approved interply sheets set in hot asphalt (Sec. 7.0).

## FINAL SURFACING:

Asphalt flood coat and gravel (Sec. 14.3).

## SUMMARY OF MATERIALS:

- Base sheet (1 ply)
- Interply sheets (2 plies)
- Flood coat and gravel
- ASTM D 312 asphalt (two moppings)

## APPROVED BASE SHEETS:

(one of the following)

- All Weather/Empire® Base Sheet
- Flintlastic Base 20
- Flintlastic Poly SMS
- Flintlastic Ultra Poly SMS
- Glasbase™ Base Sheet
- Yosemite® Venting Base Sheet

## APPROVED INTERPLY SHEETS

### (2 PLIES):

(two of the following)

- Flintglas® Ply 4
- Flintglas Premium Ply 6

## SURFACING (REQUIRED):

- Asphalt flood coat – 60 lbs/sq
- Gravel surfacing – 400 lbs/sq

## FLASHING ASSEMBLY:

- **Standard.** Over a base sheet or bonded to a primed substrate. One ply Flintlastic® modified cap sheet, per CT detail.
- **Premium.** Over a base sheet or bonded to a primed substrate. One smooth and one granulated modified membrane flashing, per CT detail.
- **Premium Alternate.** Over a base sheet or bonded to a primed substrate. One smooth modified membrane and CT SmartFlash®, per CT detail.

**Asphalt:** Type III or Type IV (Sec. 7.0).

**Cants:** In angles of roof deck and vertical surfaces, the roofing contractor shall furnish and install an approved cant strip with a minimum 3" face.

WARRANTY DURATIONS FOR THIS SPECIFICATION VARY BASED ON ROLL MATERIAL SELECTION; SEE WARRANTY MATRIX.

Applicable local building code may require more stringent installation requirements such as, but not limited to, increased fastener or adhesive densities to meet required wind uplift pressures. Consult local building code and uplift requirements prior to any application of CertainTeed roofing materials. CertainTeed is not responsible for failure to install roofing products per applicable local building codes.

Consult CertainTeed General Recommendations for noted section references.