


ECOPHON® FOCUS™ Dg

Smooth
Fiberglass

Semi-concealed grid provides unique aesthetics coupled with superior sound absorption in a wide selection of sizes and colors.

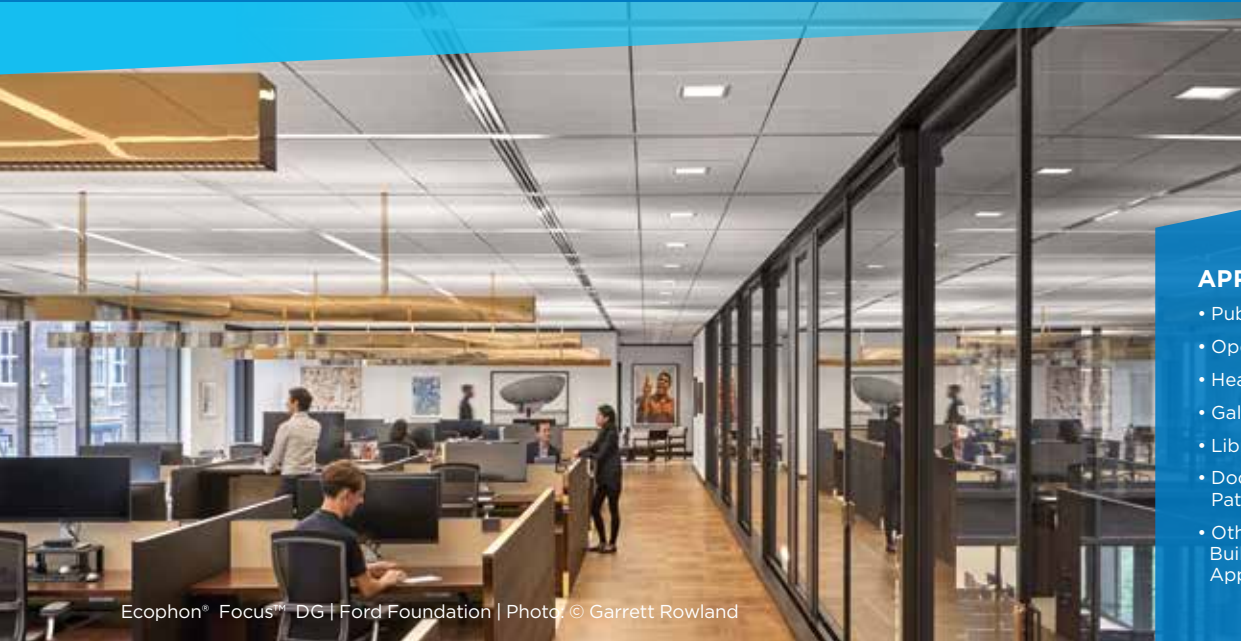

Ecophon® Focus™ DG | Ford Foundation | Photo © Garrett Rowland

APPLICATIONS


- Public Lobbies
- Open Plan Offices
- Healthcare
- Galleries
- Libraries
- Doctors' Offices / Patient Rooms
- Other Commercial Buildings / Space Applications



FEATURES AND BENEFITS

- Semi-concealed, easy downward access
- Narrow gap between panels (5/16")
- Focus Wing accessory available for finishing of cloud perimeter
- Easy-to-clean Akutex™ FT surface in white finish has perfect light diffusion (+99%)
- Fully encapsulated with tissue backing for maximum performance
- Painted, damage-resistant reveal edges
- Available in 16 standard colors

SUSPENSION SYSTEM OPTIONS



Semi-concealed
15/16 Grid

LEED® v4

RECYCLED CONTENT 71%

- ✓ EA: Optimize Energy Performance
- ✓ EA: Prereq. Min. Energy Performance
- ✓ EQ: Interior Lighting
- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Acoustic Performance
- ✓ EQ: Prereq. Min. Acoustic Performance (Schools)
- ✓ EQ: Daylight
- MR: Material Ingredients (HPDs)
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declarations (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

EPD®

EPD Available

Smooth
Fiberglass

All products in this line
feature these attributes:



FOCUS Dg

	Format	Dimensions (in.)	NRC	CAC	Recycled Content	Pieces/carton	Sq. Ft./carton	Lbs./carton	Cartons/pallet		
SEMI-CONCEALED											
	NRC 90	3542 1560	Panels	24 x 24 x 3/4	0.90	—	71%	20	80	44	n/a
		3542 1561	Panels	24 x 48 x 3/4	0.90	—	71%	10	80	44	n/a
		3542 4239	Panels	30 x 30 x 3/4	0.90	—	71%	14	87.5	43	n/a
		3542 1565	Panels	48 x 48 x 1	0.90	—	71%	6	96	64	n/a
		3542 1562	Planks	24 x 60 x 3/4	0.90	—	71%	6	60	33	n/a
		3542 1563	Planks	24 x 72 x 3/4	0.90	—	71%	6	72	36	n/a
		3542 1564	Planks	24 x 96 x 3/4	0.90	—	71%	6	96	53	n/a

All Focus Dg products listed above are white. To order colors please contact your local Sales Representative.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

ACCESSORIES







FOCUS Dg ACCESSORIES	Product Name	Pieces/carton	Use
	2630 0547 Connect Dg20 Support Clip	50	For support of any cut supporting edge on 3/4" Dg or Ds (typically 1 pc. every 12 - 18 inches)
	2630 0548 Connect Dg25 Support Clip	50	For support of any cut supporting edge on 1" Dg 4x4 panels only (typically 1 pc. every 12 - 18 inches)
	2630 0691 Connect Edge Sealant White*	1	For re-sealing cut edges (typically 100-150 lf/container); 1 liter container
	2630 0991 Connect Dg Cutting Tool	1	For rabbeting Field-cut edges for Dg or Ds
	2630 0546 Connect Edge Clip	12	Required for non-supporting edges on all 1" Dg 4x4 panels only (2/panel)
	2630 0824 Connect Wall Bracket T-Profile	25	For main runner attachment to wall (typically 2/run of main runner)
	2631 1080 Connect Perimeter Tile Clip	100	For attaching and securing panels at the perimeter
	STBAR-2 CTC 2' Stabilizer Bar	40	For all 2x5, 2x6, and 2x8 installations; typically 1 pc./panel for 2x5, 2x6, 2 pc./panel for 2x8
	2630 0196 Connect Hold Down Clip Ds	100	For use as a hold down clip with Focus Dg and Focus Ds (typically 1 pc./sf for 2x2 and 0.65 pc./sf for 2x4)

*Connect Edge Sealant is available in all standard colors. Please contact your local Sales Representative or call 800-233-8990.

ECOPHON® FOCUS™ Dg

Smooth
Fiberglass

ACCESSORIES

FOCUS WING & WING ACCESSORIES	Product Name	Pieces/carton	Use
	3549 1060 Focus Wing DS Straight Kit	3	Perimeter treatment for clouds or peninsulas; straight 48 x 8 x 2 full-concealed panel
	3549 1061 Focus Wing DS External Corner Kit	1	Perimeter treatment for clouds or peninsulas; kit for external corners containing 56 x 8 x 2 panel with mitered corner
	3549 1062 Focus Wing DS Internal Corner Kit	1	Perimeter treatment for clouds or peninsulas; kit for internal corners containing 56 x 8 x 2 panel with mitered corner
	2630 0650 Connect Wing Distance	2	For connection of Wing to Wing (typically 1 pc./Wing intersection)
	2630 0666 Connect Hook	1	For connection between Wing Corner pieces (typically 1 pc./corner)
	2630 0197 Connect Wall Spring Spacer	24	For use when trim cutting panels at the perimeter
	2631 1040 Connect L-coupling	50	For use every time a field grid member intersects with the perimeter main runners

PHYSICAL DATA

MATERIAL
Fiberglass

ASTM E1264 CLASSIFICATION
Type XII, Form 2, Pattern G

FIRE CLASS (ASTM E1264)
All are Class A per ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

MOLD/MILDEW RESISTANCE
Fiberglass substrate is inherently resistant to the growth of mold and mildew.

MAINTENANCE
Wipe with a soft cloth or vacuum with brush attachment. Cleanable with mild detergent.

WARRANTY
10-year Ecophon Warranty increases to 15 years when installed with CertainTeed suspension systems. Full warranty information can be found at certainteed.com/ceilings.



CertainTeed

CEILINGS • DECKING • FENCE • GYPSUM • INSULATION • RAILING • ROOFING • SIDING • TRIM
20 Moores Road Malvern, PA 19355 Professional: 800-233-8990 Consumer: 800-782-8777 certainteed.com

ECOPHON® FOCUS™ Dg

Smooth
Fiberglass



Ecophon® Focus™ DG | Ford Foundation | Photo: © Garrett Rowland